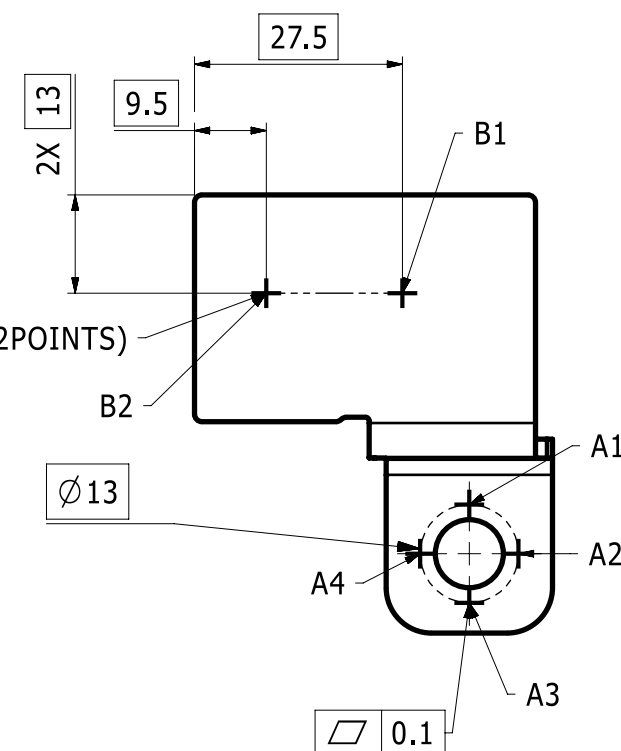
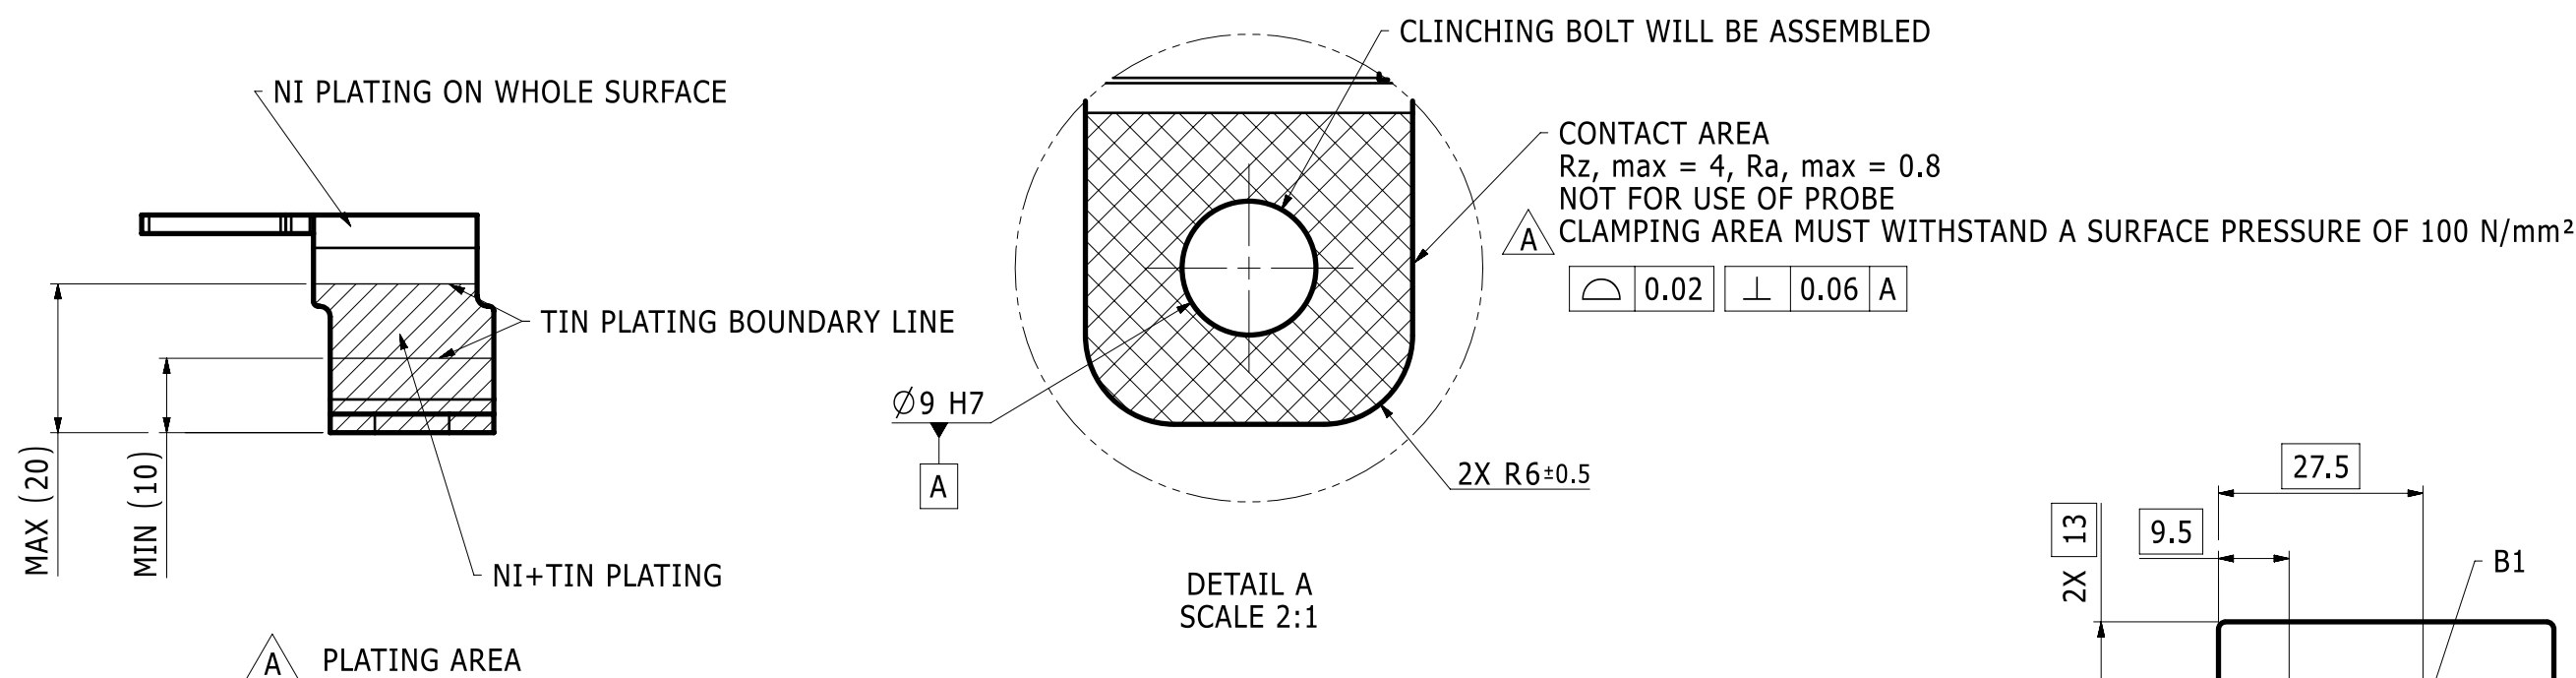
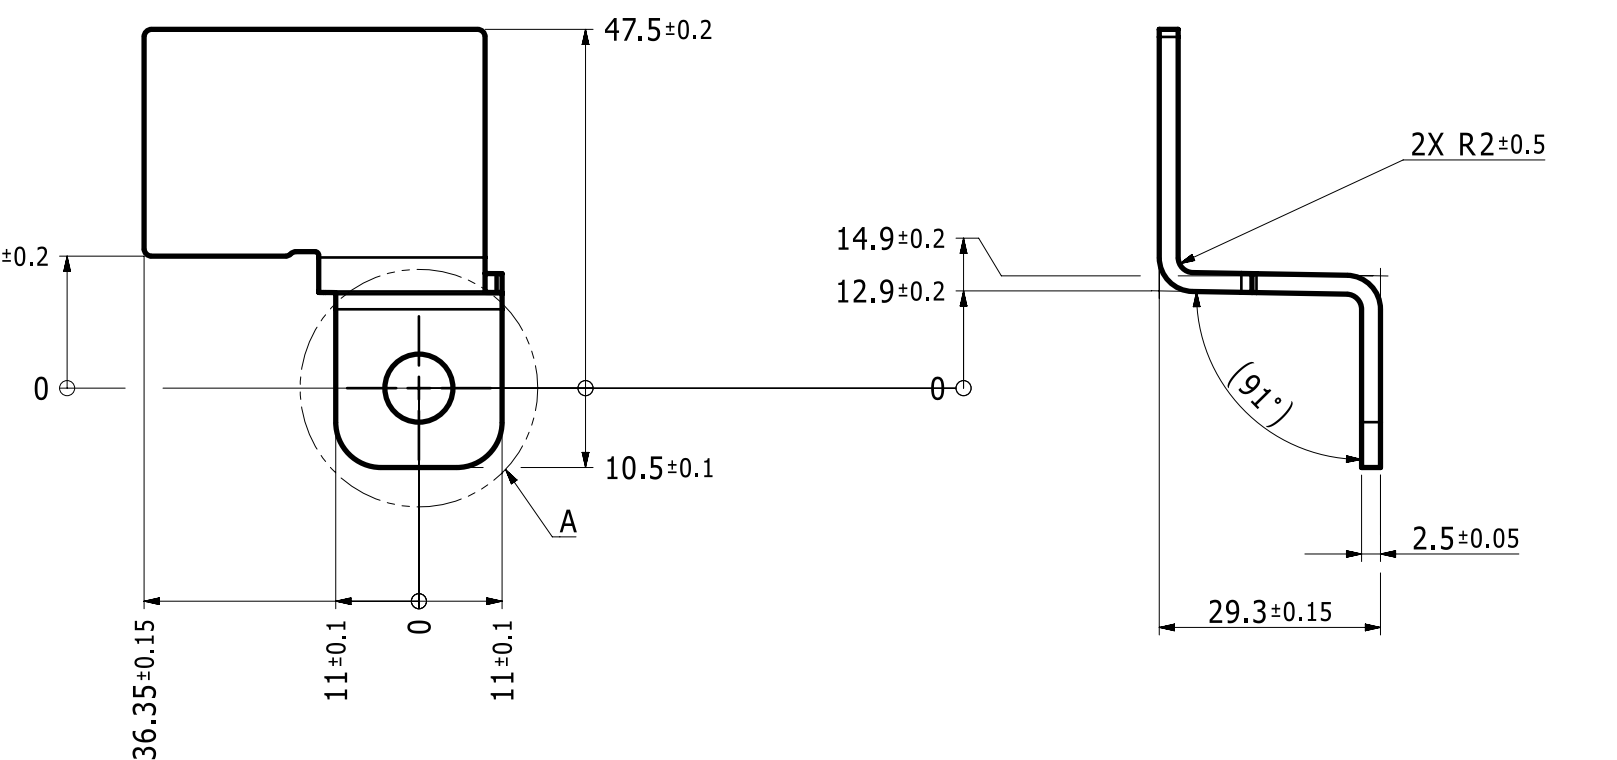


Approved

PUNCH DIRECTION →

ISO VIEW
SCALE 1:1MEASUREMENT CONDITION : FREE CONDITION
MEASUREMENT POINTS : A1 ~ A4 (4 POINTS)

NOTE

- MATERIAL SPECIFICATION
A - COPPER ALLOY, C1100R-1/2H, 2.5t±0.05 ACCORDING TO KS D 5201
- RECOMMENDED PROPERTIES : TENSILE STRENGTH : min. 240N/mm² and ELECTRICAL CONDUCTIVITY : min. 50MS/m
- PLATING SPECIFICATION
- Ep-AI/Ni 1b [max.3]/Sn 4b [max.9] ACCORDING TO VT003208126, ISO 1456, ISO 2093:1986, ISO 4526:2004
- BURR HEIGHT : LESS THAN 0.1mm
- TOOLING BRIDGE : LESS THAN 0.2mm (WITHOUT JOINING AREA)
- TOOLING BRIDGE PARTING DEPTH : LESS THAN -0.2mm (UNDERCUT)
- TOOLING BRIDGE SHOULD NOT BE POSITIONED IN THE JOINING INTERFACE AREA WHERE IS DESIGNATED.
- POSITION OF BURR AND TOOLING BRIDGE SHOULD BE ALIGNED WITH DESIGN ENGINEER.
- REMOVE OIL ON SURFACE OF PRODUCT THROUGH WASHING PROCESS.
- DYNE TEST PEN 34mN/m ACCORDING TO ISO 8296
- NO FUNCTIONALLY HARMFUL DIRT, DUST, SHARP EDGE AND SCRATCH ON THE PRODUCT
- ACCORDING TO LIMIT SAMPLE
- UNSPECIFIED DIMENSIONS REFER TO THE 3D MODEL
- IF TOLERANCE NOT SPECIFIED, GENERAL TOLERANCE TABLE SHALL BE APPLIED
- NO CORROSION ON BASE MATERIAL OF PLATING AREA DURING NEUTRAL SALT SPRAY (NSS) TEST WITH 48h ACCORDING TO ISO 9227 .

- ALL MATERIAL MUST BE COMPLIED WITH BELOW
- Regulation EC No.1907/2006, Regulation EC No.340/2008 REACH
- Directive 2000/53/EC ELV (End of Life Vehicle)
- GADSL (Global Automotive Declarable Substance List)
- GBT30512 (China ELV)
- Directive 2006/66/EU Battery

01	A	XECR-GMM-2601179	TYPO CORRECTION	Kyungmin Park	-	Jangwoong Bae	2026.05.13
Rev.	Index	ECR No.	Description	Edit	Check	Approval	Date
00	-	XECR-INT-2512128	INITIAL DRAWING	Jaepil Ahn	-	Seongik Song	2025.12.24
Symbol	Meaning	Total on sheet	General Tolerance	Size	Scale	View	Unit
K	Key functional characteristic	0	DIMENSIONS	A2	1:1	3rd	mm
S	Safety relevant	0	OVER 6 UP TO 130 ±0.1	Derived from	Model	Part Number	Rev.
G	Regulatory relevant	0	OVER 30 UP TO 130 ±0.1	-	-	V018-00646A	01
M	Measurement point	0	OVER 120 UP TO 400 ±0.1	-	-	Mass(g)	Sheet No.
No.	CPK	0	OVER 400 UP TO 1000 ±0.1	-	-	65.2	1 of 1
No.	Part	0	ROUND, CHAMFER	-	-	-	-
No.	Index of revision	3	OVER 3 UP TO 6 ±0.05	-	-	-	-
No.	RQI / FAI	0	OVER 6 UP TO 10 ±0.1	-	-	-	-
No.	Index of revision	3	OVER 10 UP TO 150 ±0.1	-	-	-	-
No.	Index of revision	3	OVER 150 UP TO 400 ±0.1	-	-	-	-
No.	Index of revision	3	OVER 400 UP TO 1000 ±0.1	-	-	-	-