

Quality Assurance Report

CUSTOMER(고객명)	DESCRIPTION(품명)	PLATING DATE(도금일자)	ISSUED DATE(발행일자)
조광산업	BUSBAR G/BUSBAR G1	260810-01	2026.08.10
MATERIAL(재질)	SPEC		수량
CU	Sn: 3.0~5.0 μ m		118 EA

NO	INSPECTION ITEMS	Ac/Re	RESULT	NO	INSPECTION ITEMS	Ac/Re	RESULT
1	DISCOLORATION(변색)	0/1	V	6	BENT(변형)	0/1	V
2	STAIN(얼룩)	0/1	V	7	NO PLATING(미도금)	0/1	V
3	RUST(부식)	0/1	V	8			
4	CONTAMINATION(오염)	0/1	V	9			
5	PEELING(도금 벗겨짐)	0/1	V	10			

II.DIMENSION INSPECTION

NO	INSPECTION ITEMS	SPECIFICATION	MIN	MAX	AVERAGE	RESULT
11	PLATING THICKNESS (Sn)	3.0~5.0 μ m				
12						
13						
14						

도금두께 성적서 참조

III.FUNCTIONAL TEST

NO	INSPECTION ITEMS	SPECIFICATION	TEST SAMPLE	RESULT
15	ADHESION TEST (밀착성 시험)	Not permit the peeling		OK
16				

FINAL RESULT	REMARK	PREPARED BY	CHECKED BY	APPROVED BY
		우데스	/	

조광산업

Sn: 3.0~5.0 μ m

품명: BUSBAR G/BUSBAR G1

LOT NO: 260810-01


일자: 2026.08.10

No	μ m Sn	Sn 3.688	tolerance 4.168	4.648
1	4.447			
2	4.583			
3	4.278			
4	3.688			
5	3.843			
Mean	4.168			
S.Dev	0.346			

FUNC: MEASURE
DATE: 2026-08-10
COL : 1.000 mm

Sn
Ni
Cu

SEC : 15 Sec

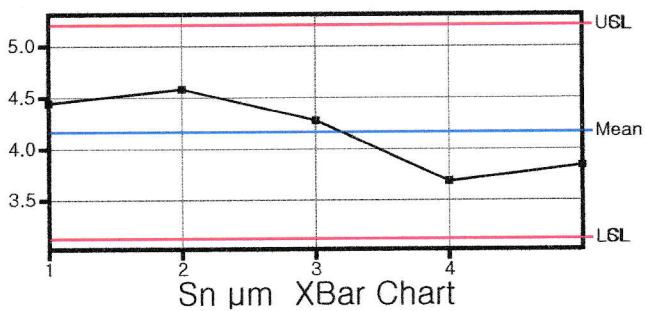

도금원소 : Sn/Ni//Cu

측정값 개수 5

최대값 4.583

최소값 3.688

범위 0.895

평균값 4.168

표준편차 0.346

변동계수 8.299

발행처 : 우리하이피

