



Quality Assurance Report

CUSTOMER(고객명)	DESCRIPTION(품명)	LOT NO(로트번호)	ISSUED DATE(발행일자)
신흥 SEC	0.4*26	20260825 -01 ~ 14	2026-08-25
규격(재질)		LOT SIZE(수량)	
0.4*26 AL	Ni 1.5 μ m ~	753 Kg	

I. VISUAL INSPECTION (Sampling Plan : n=100mm/Reel, 5Reel/Shipping or n=50ea/5Reel)

NO	INSPECTION ITEMS	Ac/Re	RESULT	NO	INSPECTION ITEMS
1	DISCOLORATION(변색)	0/1	OK	6	NO PLATING(미도금)
2	STAIN(얼룩)	0/1	OK	7	PEELING(도금 벗겨짐)
3	RUST(부식)	0/1	OK	8	LUMP(도금물침)
4	CONTAMINATION(오염)	0/1	OK	9	CAMBER(휨)
5	BENT(변형)	0/1	OK	10	PLATING BURR (도금

8/25

0.4x26

① 54 ② 52 ③ 54
④ 53 ⑤ 54 ⑥ 54
⑦ 54 ⑧ 54 ⑨ 54
⑩ 54 ⑪ 54 ⑫ 54
⑬ 54 ⑭ 54 ⑮ 54
⑯ 54 ⑰ 54

총 753kg

II. DIMENSION INSPECTION (Sampling Plan : n=100mm/Reel, 5Reel/Shipping or n=50ea/5Reel)

NO	항목/구분	SPEC			검사주기	우리하이피	
		규격	하한(-)	상한(+)		1차	2차
1	전폭	26.0	-0.1		Reel/Lot	25.972	0.402
2						25.973	0.402
3						25.981	0.403
4						25.949	0.403
5						25.964	0.403
6						25.976	0.402
7						25.970	0.403
8						25.981	0.402
9						25.994	0.402
10						25.991	0.402

III. PLATING THICKNESS(도금두께) (Sampling Plan : 1y)

NO	SPECIFICATION		Measurement Data	RESULT
1	X-Ray 측정	Ni 1.5 μ m ~	첨부 : 도금성적서 첨부 : 도금성적서	OK

IV. FUNCTIONAL TEST (Sampling Plan : n=100mm/EA, 2EA/Shipping, c=0)

NO	INSPECTION ITEMS	SPECIFICATION	TEST SAMPLE	RESULT
1	ADHESION TEST (밀착성 시험)	1.제품을 스카치 Tape에 완전 밀착후 45도 각도로 순간적으로 떼어낸다.(들뜸 및 벗겨짐) 2.테이프 시험이 안되는 제품은 니퍼로 90도로 상 하각은후 도금들뜸 이나 벗겨짐이 없을것.		OK

제품 도면		우리 하이 피	작성	승인	종합 판정	
		고 객	김영란	조승현		
			작성	승인	종합 판정	


업체명 : 신흥SEC

품명 : 0.4x26 초물 LOT NO : 260825-01 DATE : 26.08.25.

No	μm Ni	Ni tolerance
1	2.021	1.990 2.039 2.088
2	2.057	
3	2.005	
4	2.019	
5	2.044	
6	2.088	
Mean	2.039	
S.Dev	0.030	

FUNC: MEASURE
COL : 0.100 mm

Ni
—
Al
SEC : 15 Sec

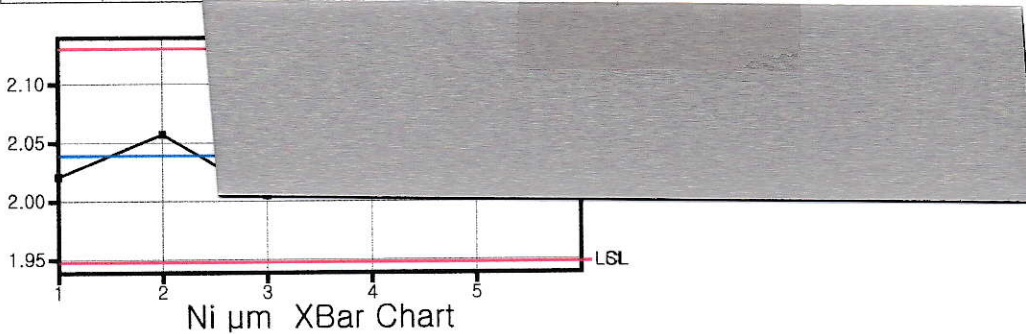

도금원소 : Ni//Al

측정값 개수 6

최대값 2.088

최소값 2.005


범위 0.083

평균값 2.039

표준편차 0.030

변동계수 1.492

우리하이피

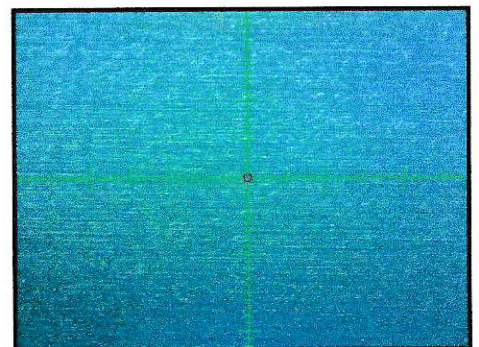

업체명 : 신흥SEC


품명 : 0.4x26 초물 LOT NO : 260825-14 DATE : 26.08.25.

No	μm Ni	Ni tolerance		
		2.009	2.048	2.086
1	2.061			
2	2.009			
3	2.046			
4	2.039			
5	2.054			
6	2.077			
Mean	2.048			
S.Dev	0.023			

FUNC: MEASURE
COL : 0.100 mm

Ni
—
Al

SEC : 15 Sec

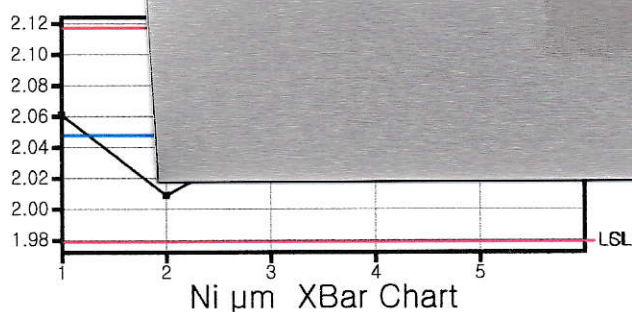

도금원소 : Ni//Al

측정값 개수 6

최대값 2.077


최소값 2.009

범위 0.068

평균값 2.048

표준편차 0.023

변동계수 1.125

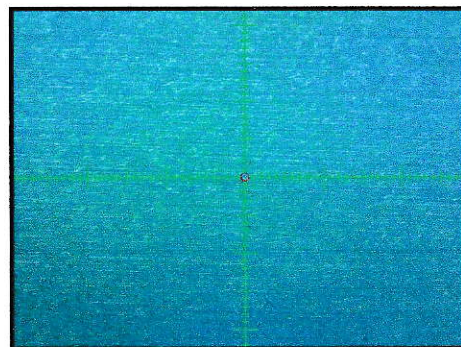

우리하이피