WATER HYDRAULIC VALVES / PRODUCT INFORMATION

# 4/2 & 3/2 Directional Control Valves

Map each valve position to the actuator connections, including the return path and the required state after control power is lost.

Solenoid, manual, detent, air pilot, water pilot and oil pilot arrangements are available.



4/2 & 3/2 Directional Control Valves - Product view

## Key operating parameters

| Parameter | Published value |
|---|---|
| Maximum inlet pressure | 160 bar (2,321 psi) |
| Operating pressure | 0-160 bar (0-2,321 psi) |
| Flow range | 0-30 L/min (0-7.93 US gpm) |
| Flow coefficient | Cv 0.62 / Kv 0.75 |
| Feed gallery | 6 mm (0.236 in) |

## Selection basis

Match the selected configuration to the working water, pressure, flow, temperature and duty. Maximum ratings and separate curve points do not establish one simultaneous operating point. Confirm installation and supplied configuration with WaterQuest Solutions.

# Technical data

| Parameter | Published value |
|---|---|
| Maximum inlet pressure | 160 bar (2,321 psi) |
| Operating pressure | 0-160 bar (0-2,321 psi) |
| Flow range | 0-30 L/min (0-7.93 US gpm) |
| Flow coefficient | Cv 0.62 / Kv 0.75 |
| Feed gallery | 6 mm (0.236 in) |
| Ports | ¼" BSPP |
| Materials | AISI 316 stainless steel / polymer |
| Solenoid system | 24 V DC |
| Electrical connections | Spade or Hirschmann |
| Fluid | Water |

## 4/2 & 3/2 Directional Control Valves - options

| Function | Stand-alone | Manifold | CETOP 3 |
|---|---|---|---|
| 4/2 | 201BBSW | 2M01BBSW | 2C01BBSW |
| 3/2 - spring opens P | 208BBSW | 2M08BBSW | 2C08BBSW |
| 3/2 - spring closes P | 203BBSW | 2M03BBSW | 2C03BBSW |


### Selection and integration

Selection considerations Two-position valves can be supplied with double-solenoid detent operation. Use corrosion-resistant circuit materials and control ferrous particles and oxides in the water. Discuss your application


# Drawings and reference visuals

Dimensions, ports and curves are reproduced from the webpage visuals. Use the original drawing units and confirm the current approved drawing before fabrication or installation.


### 4/2 & 3/2 Directional Control Valves - Flow characteristics

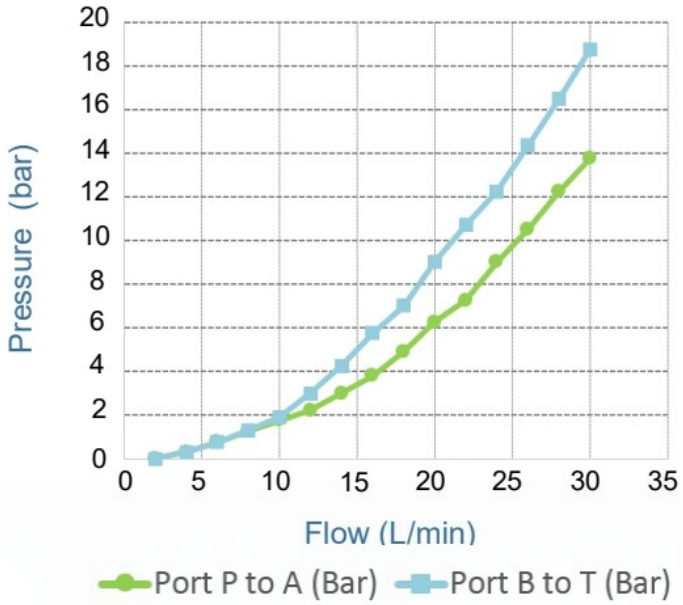


### 4/2 & 3/2 Directional Control Valves - 4/2 dimensions

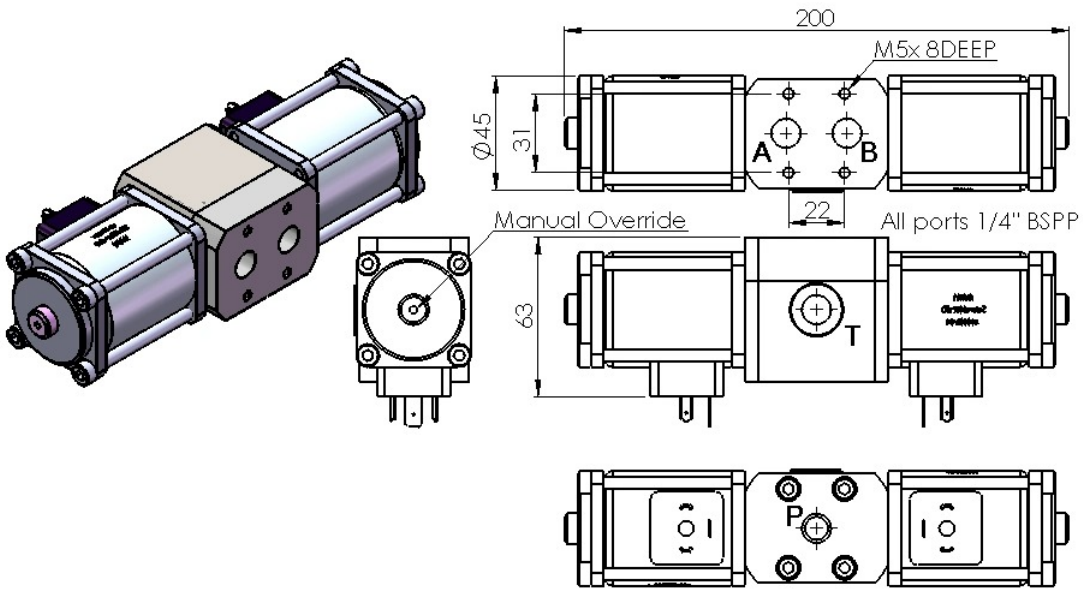

## 4/2 & 3/2 Directional Control Valves - CETOP dimensions

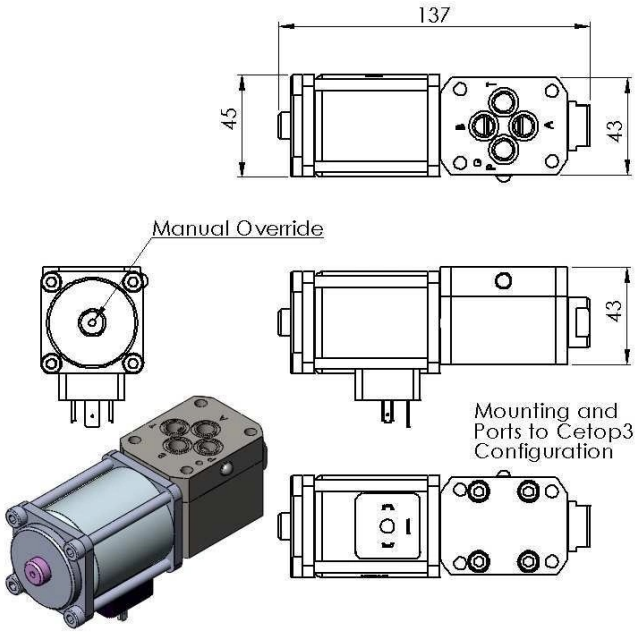


## 4/2 & 3/2 Directional Control Valves - 3/2 dimensions

