
WATER HYDRAULIC VALVES / PRODUCT INFORMATION

Check Valves

Select cracking pressure, permitted flow and reverse-pressure capability together. A check valve's function does not by itself establish a complete load-holding safety system.

Choose from DN6 through DN25 for flow capacities up to 200 L/min (52.8 US gpm).

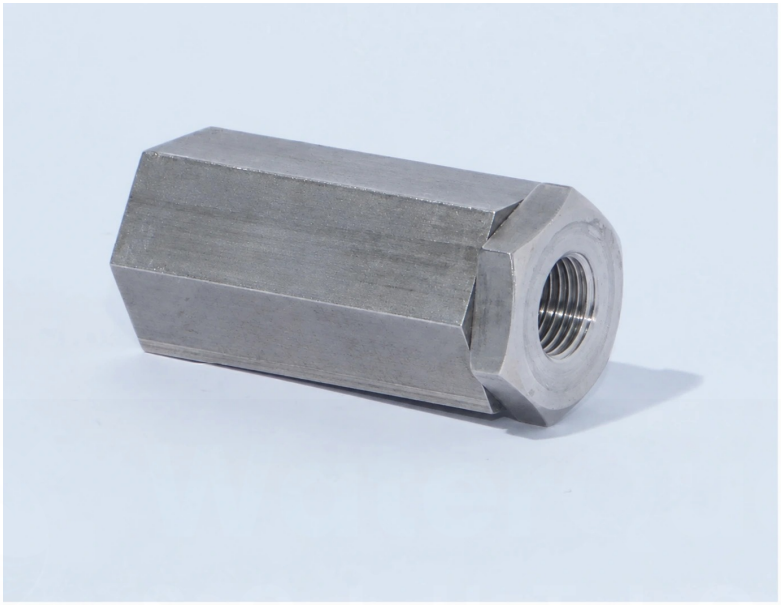

Check Valves - Product view

Key operating parameters

Parameter	Published value
Pressure range	0.1-160 bar (1.45-2,321 psi)
Sizes	DN6, DN9, DN12, DN16 and DN25
Materials	316 stainless steel / engineering polymer
Fluid	Tap water
Standard cracking pressure	1 bar (14.5 psi)

Selection basis

Match the selected configuration to the working water, pressure, flow, temperature and duty. Maximum ratings and separate curve points do not establish one simultaneous operating point. Confirm installation and supplied configuration with WaterQuest Solutions.

Technical data

Parameter	Published value
Pressure range	0.1-160 bar (1.45-2,321 psi)
Sizes	DN6, DN9, DN12, DN16 and DN25
Materials	316 stainless steel / engineering polymer
Fluid	Tap water
Standard cracking pressure	1 bar (14.5 psi)
Cracking-pressure options	0.1-6 bar (1.45-87 psi); specify required setting

Check Valves - options

Size / code	Max flow	Cv	Gallery	Ports
DN6 · 210BXSW	30 L/min (7.93 US gpm)	0.65	6 mm (0.236 in)	¼" BSPP
DN9 · 210CXSW	50 L/min (13.2 US gpm)	0.65	9.5 mm (0.374 in)	" BSPP
DN12 · 210DXSW	60 L/min (15.9 US gpm)	1.92	12.7 mm (0.5 in)	½" BSPP
DN16 · 210EXSW	100 L/min (26.4 US gpm)	4.5	16 mm (0.63 in)	¾" BSPP
DN25 · 210FXSW	200 L/min (52.8 US gpm)	6.6	25 mm (0.984 in)	1" BSPP

Size / code	Length A	A/F B
DN6 · 210BXSW	56.5 mm (2.22 in)	25.6 mm (1.01 in)
DN9 · 210CXSW	89 mm (3.5 in)	22.2 mm (0.874 in)
DN12 · 210DXSW	70 mm (2.76 in)	29 mm (1.14 in)
DN16 · 210EXSW	147.3 mm (5.8 in)	42.4 mm (1.67 in)
DN25 · 210FXSW	147.3 mm (5.8 in)	42.4 mm (1.67 in)


Selection and integration

Selection considerations Specify the required cracking pressure when ordering. Discuss your application

Drawings and reference visuals

Dimensions, ports and curves are reproduced from the webpage visuals. Use the original drawing units and confirm the current approved drawing before fabrication or installation.

Check Valves - Dimensions

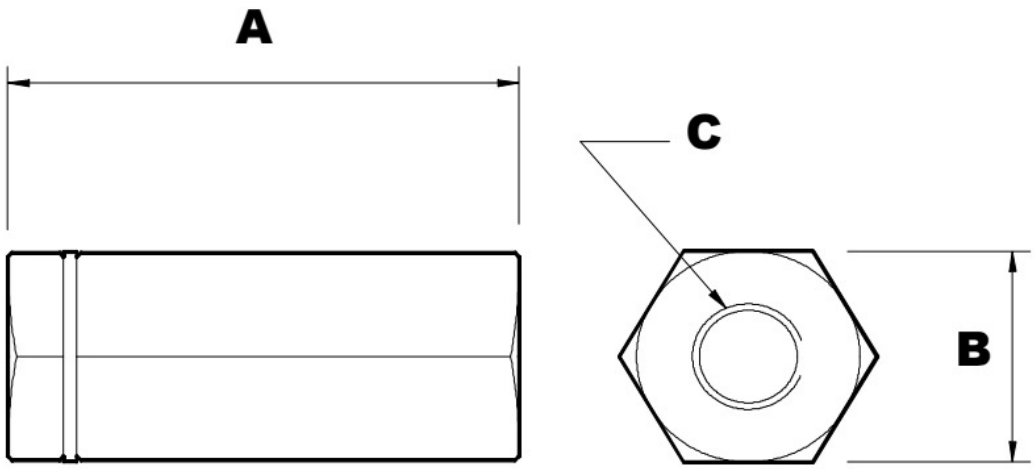

Dimensions in mm (see table)