
The valve arrangement determines what the machine does next.

Select directional, pressure, flow and load-control functions for the whole operating sequence. Check the normal position, minimum differential pressure and loss-of-power response as carefully as maximum flow.

Switch a flow path, maintain pressure, meter flow or hold a load. Start with the function, then compare the operating limits and control options on each product page.

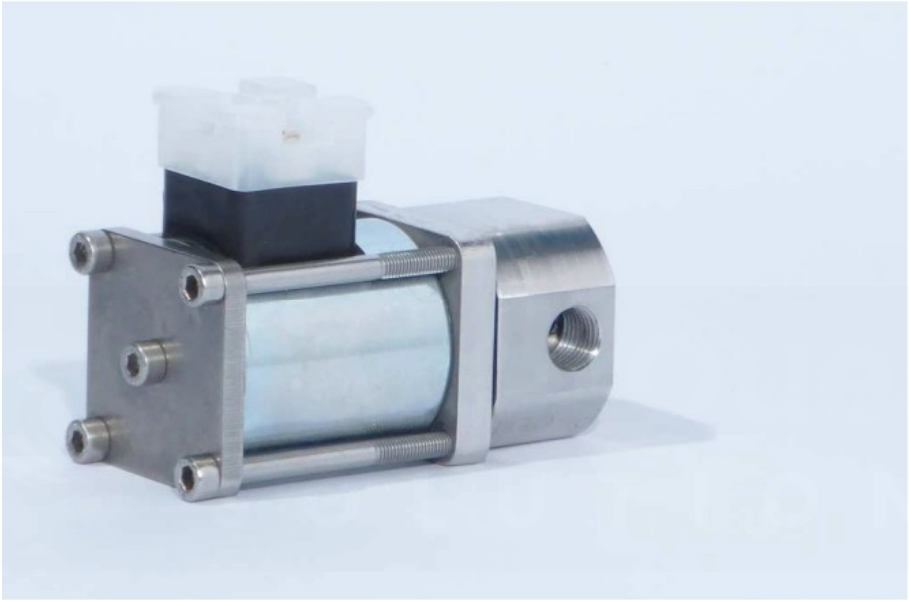

2/2 Directional Valve - Product view

Selection basis

Match the selected configuration to the working water, pressure, flow, temperature and duty. Maximum ratings and separate curve points do not establish one simultaneous operating point. Confirm installation and supplied configuration with WaterQuest Solutions.

Technical data

Model selector

Product / configuration	Published selection information
2/2 Directional Valve	Maximum inlet pressure 160 bar (2,321 psi); Operating pressure 8-160 bar (116-2,321 psi)
2/2 Pilot Valves	Maximum inlet pressure 160 bar (2,321 psi); Operating pressure 8-160 bar (116-2,321 psi)
4/2 & 3/2 Directional Control Valves	Maximum inlet pressure 160 bar (2,321 psi); Operating pressure 0-160 bar (0-2,321 psi)
4/3 Directional Control Valves	Maximum inlet pressure 160 bar (2,321 psi); Operating pressure 0-160 bar (0-2,321 psi)
Solenoid Actuation Cards	Standard power supply Regulated 24 V DC, 5 A; Signal input 5-24 V relative to supply 0 V
Check Valves	Pressure range 0.1-160 bar (1.45-2,321 psi); Sizes DN6, DN9, DN12, DN16 and DN25
ST5-Q-NN Microstep Drive	Model ST5-Q-NN; Drive part number 5000-128
DN16 Directional Valves	Maximum inlet pressure 160 bar (2,321 psi); Operating pressure 0-100 bar (0-1,450 psi)
Electronic Flow Control Valves	Maximum inlet pressure 160 bar (2,321 psi); Operating pressure 0-160 bar (0-2,321 psi)
Electronic Pressure Control Valve	Maximum inlet pressure 160 bar (2,321 psi); Operating pressure 0-160 bar (0-2,321 psi)
Flow Control Valves	Operating pressure 0.1-160 bar (1.45-2,321 psi); Sizes / galleries DN3: 3 mm (0.118 in) / DN6: 6 mm (0.236 in)
Hose Burst Valves	Operating pressure 0.1-160 bar (1.45-2,321 psi); Materials AISI 316 stainless steel / polymer
Valve Manifolds	Construction 316 stainless steel; Stations 1, 2, 3 or 4
DN12 Pilot-Operated Check Valve	Maximum inlet pressure 160 bar (2,321 psi); Operating pressure 0-160 bar (0-2,321 psi)
DN6 Pilot-Operated Check Valves	Maximum inlet pressure 160 bar (2,321 psi); Operating pressure 0-160 bar (0-2,321 psi)
Pressure-Compensated Flow Control Valve	Operating pressure 5-160 bar (72.5-2,321 psi); DN3 / DN6 flow 0.5-5 / 3-30 L/min (0.132-1.32 / 0.793-7.93 US gpm)
Pressure Reducing Valves	Maximum inlet pressure 180 bar (2,611 psi); Outlet setting bands 10-30 / 30-100 / 70-160 bar (145-435 / 435-1,450 / 1,015-2,321 psi)
Relief Valves	Maximum inlet pressure 180 bar (2,611 psi); confirm special pressure configurations; Setting bands 10-30 / 25-100 / 70-160 bar (145-435 / 363-1,450 / 1,015-2,321 psi); special ranges by review
Valve Ordering Guide	Pressure class 1: below 30 bar (435 psi) / 2: up to 160 bar (2,321 psi); Special relief classes 3: special range / 4: 25-100 bar (363-1,450 psi); confirm configuration
Zone Valves	Maximum pressure 160 bar (2,321 psi); Flow per zone 0-60 L/min (0-15.9 US gpm)

Selection and integration

Choosing a valve? Have the flow rate, operating pressure, water quality and actuation method ready. Mounting, port size and the required rest position complete the selection. Read the ordering guide

Drawings and reference visuals

Dimensions, ports and curves are reproduced from the webpage visuals. Use the original drawing units and confirm the current approved drawing before fabrication or installation.


2/2 Pilot Valves - Product view




4/2 & 3/2 Directional Control Valves - Product view




4/3 Directional Control Valves - Product view

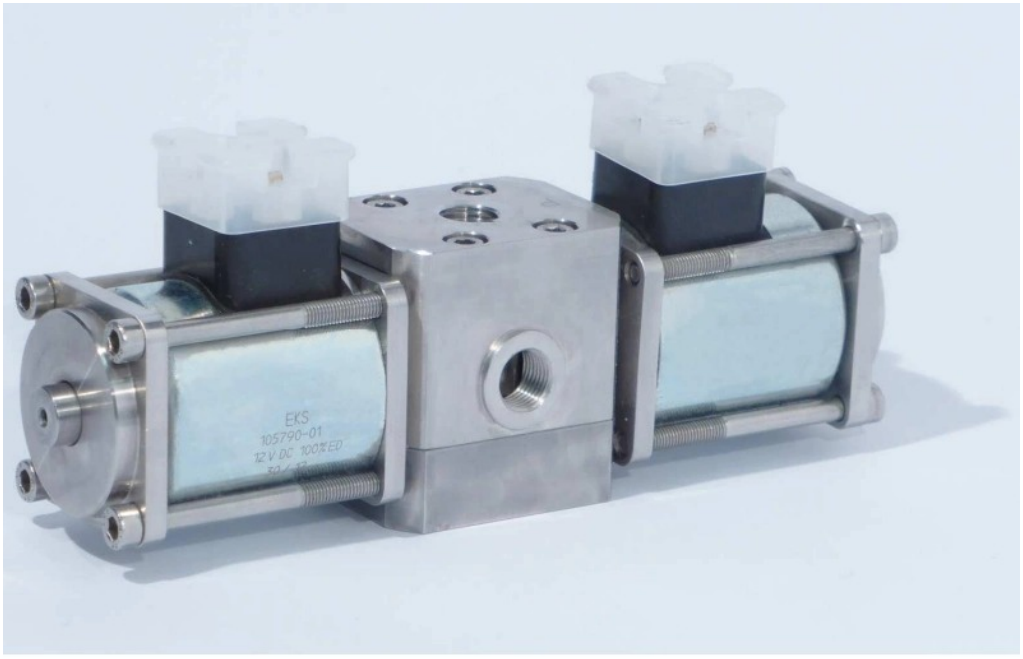


DN16 Directional Valves - Product view

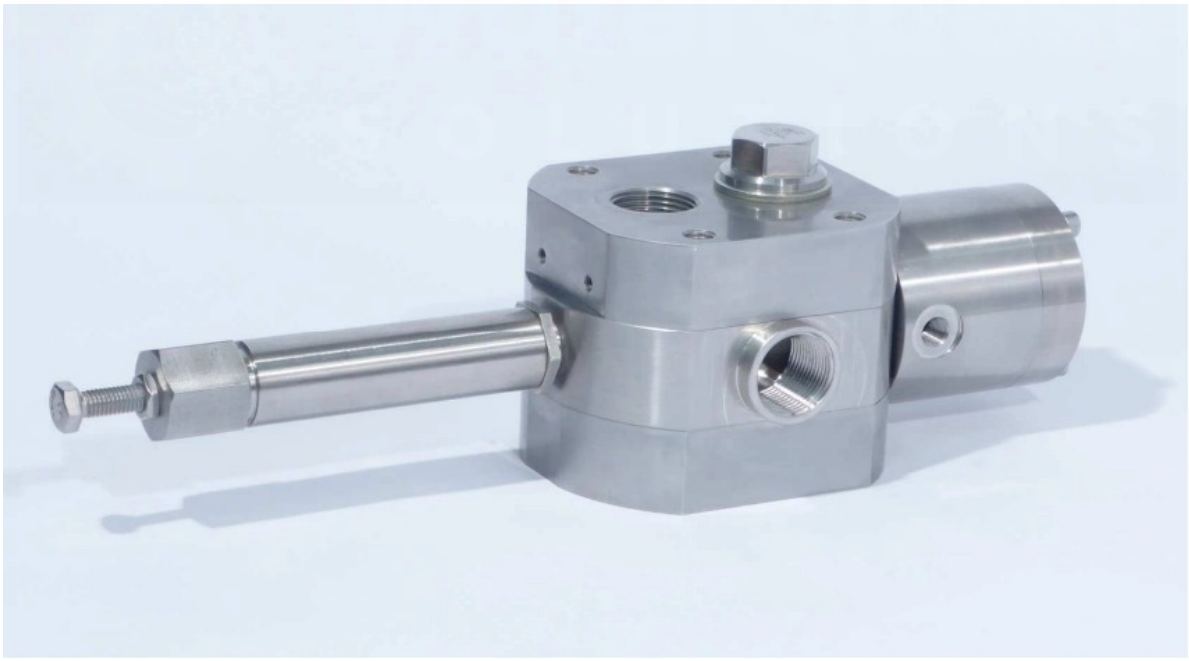

Check Valves - Product view

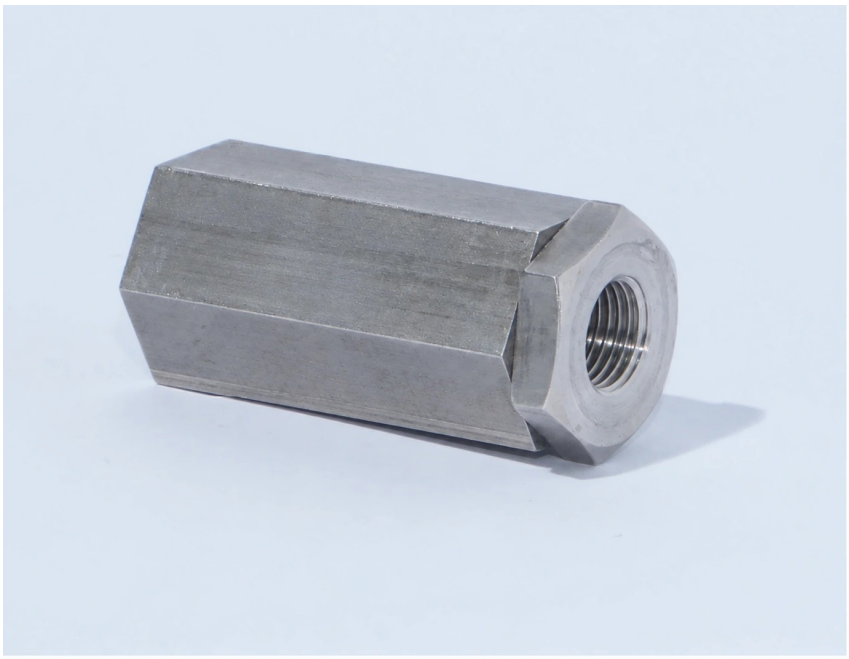


DN6 Pilot-Operated Check Valves - Product view

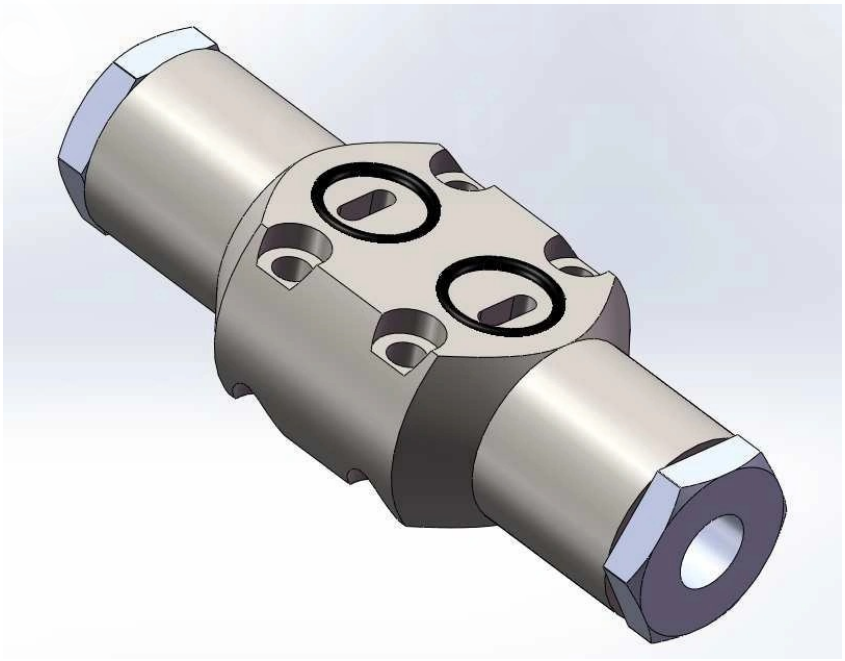

DN12 Pilot-Operated Check Valve - Product view



Hose Burst Valves - Product view

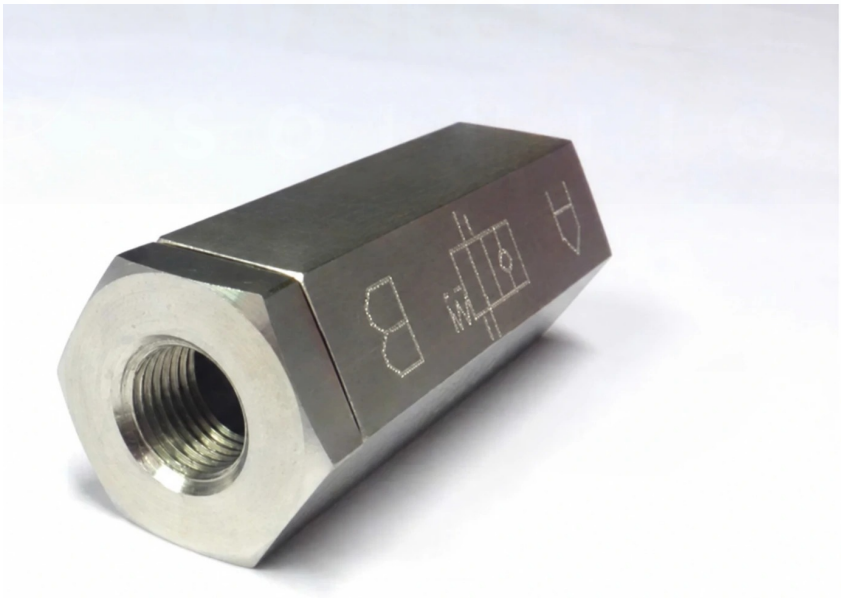

Flow Control Valves - Product view



Pressure-Compensated Flow Control Valve - Product view



Application and specification

Have the flow rate, operating pressure, water quality and actuation method ready. Mounting, port size and the required rest position complete the selection.

Share your flow, pressure, fluid and control requirements. WaterQuest Solutions can help define the configuration for your application.