


Single Channel DC Linear Power Supply

MPS-H-1 Series



EmailSupport: service@szmatrix.com

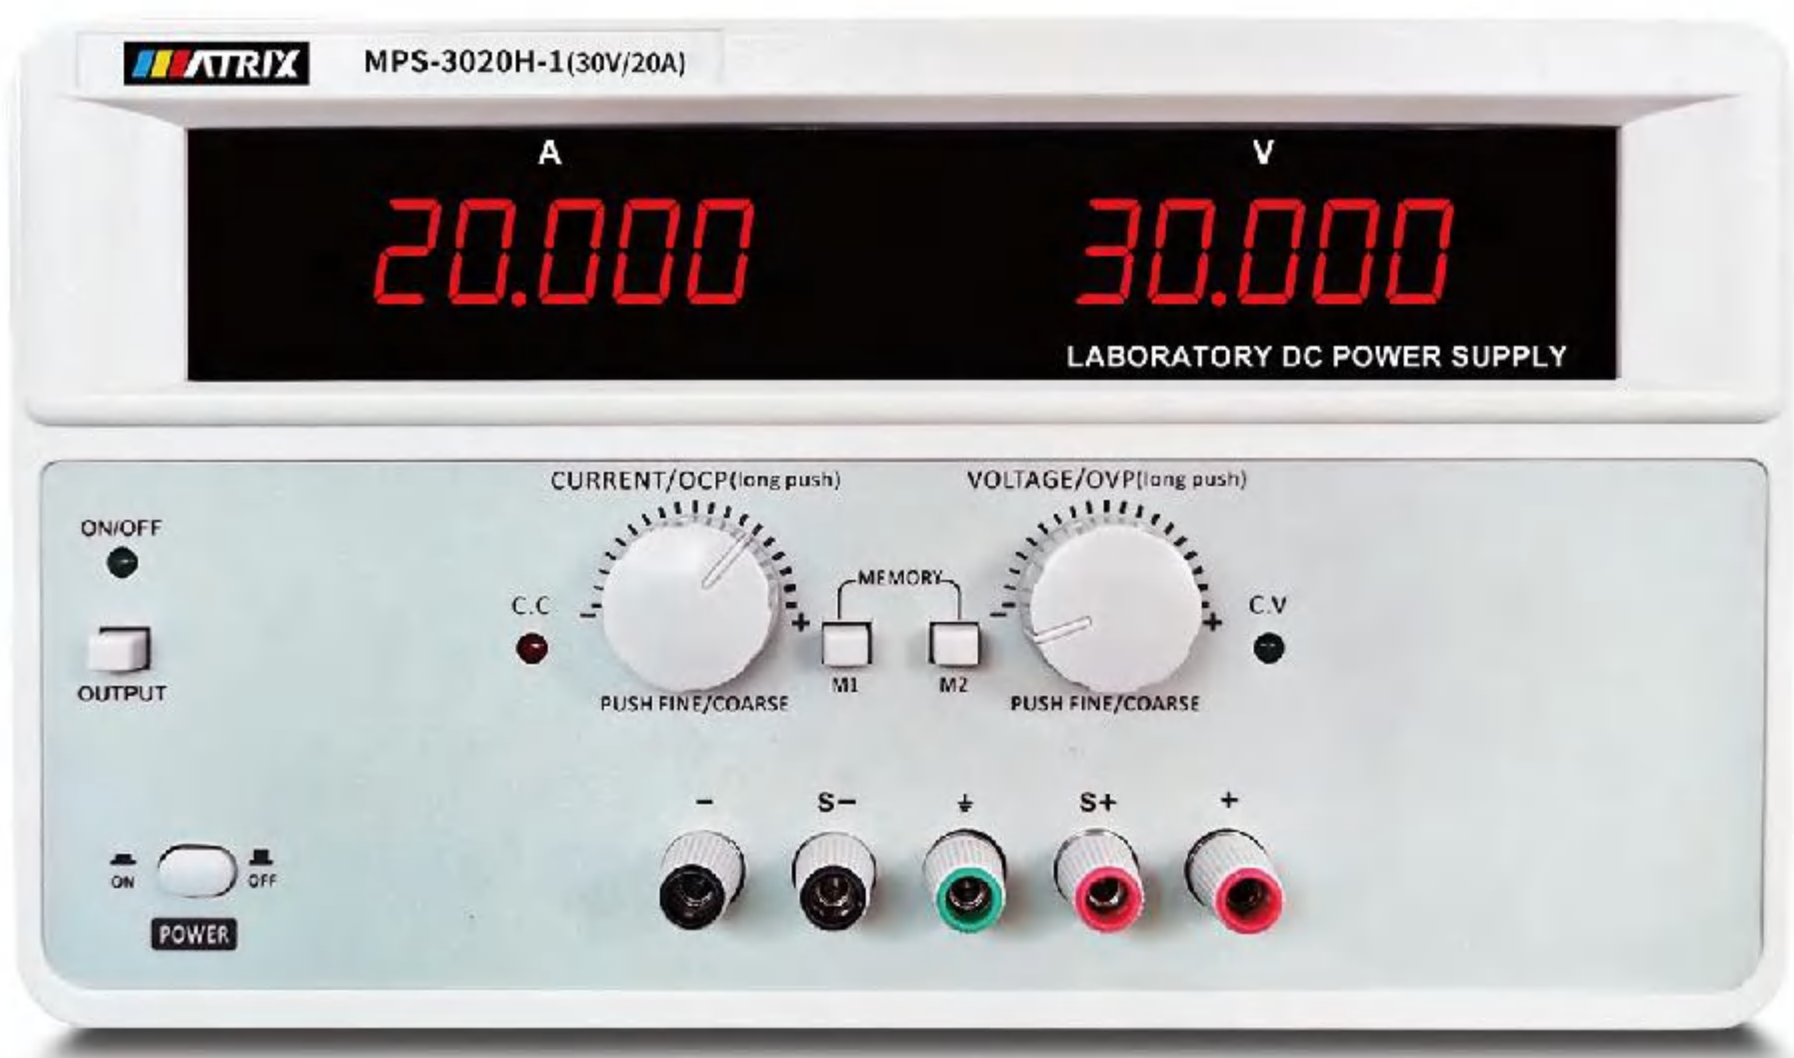

- It can save the output status and value before the last shutdown
- Current can be pre-set without short circuit;
- Current and voltage output can be set in a certain range, which can prevent misoperation from damaging the tested object
- Slow startup circuit design, small surge current
- Voltage compensation function to ensure high precision
- USB, RS-232/485 are optional
- Two groups memory, can be recalled quickly
- One click to restore factory settings

Standard SENSE ☒ Optional RS-232 ☐ RS-485 ☐ USB ☐

≤600W Linear DC power supply

Model	Voltage	Current	Power
MPS-3010H-1	0-30V	0-10A	300W
MPS-3020H-1	0-30V	0-20A	600W
MPS-6005H-1	0-60V	0-5A	300W
MPS-6010H-1	0-60V	0-10A	600W
MPS-10003H-1	0-100V	0-3A	300W
MPS-20002H-1	0-200V	0-2A	400W
MPS-30001H-1	0-300V	0-1A	300W

Model		MPS-3010H-1	MPS-3020H-1	MPS-6005H-1	MPS-6010H-1	MPS-10003H-1	MPS-20002H-1	MPS-30001H-1
Input voltage		AC 220V/110V±10% 50Hz/60Hz						
Rated output	Voltage	0~30V	0~30V	0~60V	0~60V	0~100V	0~200V	0~300V
	Current	0~10A	0~20A	0~5A	0~10A	0~3A	0~2A	0~1A
Load regulation rate	Voltage	≤0.01%+10mV	≤0.01%+10mV	≤0.01%+5mV	≤0.01%+5mV	≤0.01%+8mV	≤0.01%+12mV	≤0.01%+12mV
	Current	≤0.2%+5mA	≤0.2%+5mA	≤0.2%+5mA	≤0.2%+5mA	≤0.2%+5mA	≤0.2%+5mA	≤0.2%+5mA
Line regulation rate	Voltage	≤0.01%+10mV	≤0.01%+10mV	≤0.01%+5mV	≤0.01%+5mV	≤0.01%+8mV	≤0.01%+12mV	≤0.01%+12mV
	Current	≤0.2%+5mA	≤0.2%+5mA	≤0.2%+5mA	≤0.2%+5mA	≤0.2%+5mA	≤0.2%+5mA	≤0.2%+5mA
Setting resolution rate	Voltage	1mV	1mV	1mV	1mV	10mV	10mV	10mV
	Current	1mA	1mA	1mA	1mA	1mA	1mA	1mA
Setting accuracy	Voltage	≤0.01%+10mV	≤0.01%+10mV	≤0.01%+10mV	≤0.01%+10mV	≤0.01%+80mV	≤0.01%+80mV	≤0.01%+80mV
	Current	≤0.1%+5mA	≤0.1%+10mA	≤0.1%+5mA	≤0.1%+5mA	≤0.1%+5mA	≤0.1%+5mA	≤0.1%+5mA
Readback resolution rate	Voltage	1mV	1mV	1mV	1mV	10mV	10mV	10mV
	Current	1mA	1mA	1mA	1mA	1mA	1mA	1mA
Readback accuracy	Voltage	≤0.01%+10mV	≤0.01%+10mV	≤0.01%+10mV	≤0.01%+10mV	≤0.01%+80mV	≤0.01%+80mV	≤0.01%+80mV
	Current	≤0.1%+5mA	≤0.1%+10mA	≤0.1%+5mA	≤0.1%+5mA	≤0.1%+5mA	≤0.1%+5mA	≤0.1%+5mA
Ripple and noise	Voltage	≤3mV(rms)						
	Current	≤5mA(rms)						
Working temperature		0~40℃≤80%RH						
Size (WxHxD)	mm	250*150*330						
Weight	kg	8	13	8	13	12	12	12

* If with interface, the model NO. will be changed to MPS-H-1C, for example, MPS-3010H-1C means it has RS-232,RS-485 and USB.

Link to the user manual (including the programming protocol):

<https://wendy4197.github.io/MATRIX/MPS-H-1-UserManual.pdf>