

CAPXS

Smart Video Intercom - S
Section 28 13 00

DATA SHEET



Key Features

Unit Interface Capabilities
Scheduling Capabilities

Touchscreen/voice/PIN
Yes

Specifications

Data Connectivity
Voice Communication
Calling Connectivity
Included Power Supply Ratings

Wi-Fi and Ethernet
Wi-Fi and Ethernet
VoIP*
Input: 120 VAC, 60Hz, 1A max
Output: 16 VDC, 2.5 A, 40 W
CAPXS DC input ratings 16 VDC, 10 W max
Cloud (myQ® Community)

Programming (Database Management)
Remote Programming (Database Management)
Realtime Event Monitoring (Email Notifications)
Software

Yes
Yes
myQ Community web portal

Wiegand Input Data Format
Local User Capacity Per Unit
Local Event History Per Unit

26 BIT, 37 BIT (HID), 37 BIT (Transcore), AND 32 BIT (MiFare)
500
3,000

Max Number of Gates/Doors of Control (Each)
Wiegand Input
Relay Output

1 Door - (Vestibule Mode capable with Aux Relay)
1 (only supports data lines, not any LEDs)
2 (1 primary, 1 auxiliary)

Mounting Options
Operating Temperature
Display Type

Surface/gooseneck
-4°F to 122°F (-20°C to 50°C)
5-inch full color touch screen with Picture-in-Picture

Display Resolution
Integrated Video Camera
Anti-Tamper Alarm Notification

720p high definition
Yes
Yes - shock sensor records events and notifications records can be sent via email from myQ Community

Warranty

2 years

Construction

Enclosure Material
Impact Rating
Weatherproof Rating

Polycarbonate
IK07
IP54


* LiftMaster uses phone.com exclusively

CAPXS

DATA SHEET

Smart Video Intercom - S
Section 28 13 00

Dimensions

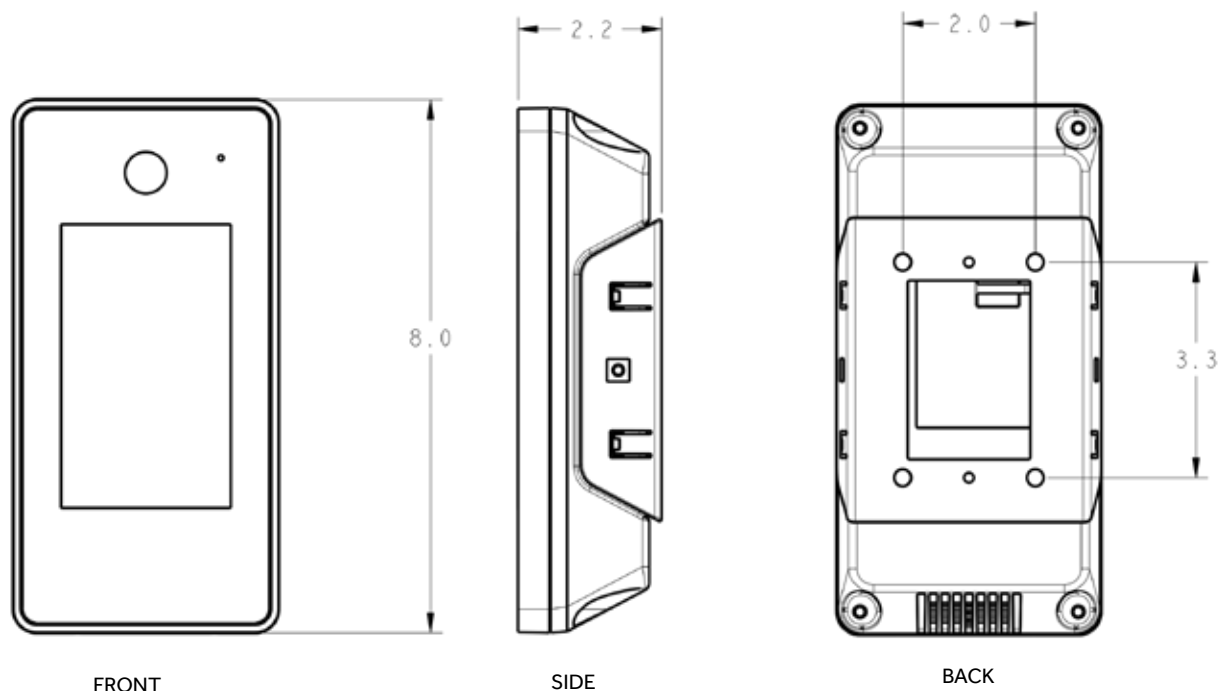

Range

CAPXS Feature	Wired	Wireless	Wire Type	Range
Power 120VAC to 16VDC transformer (from outlet to controller)	x		2 wire (14 AWG) 2 wire (16 AWG) 2 wire (18 AWG)	Up to 300 ft. Up to 200 ft. Up to 100 ft.
Wiegand accessory wiring	x		3 wire (18-22 AWG)	Up to 500 ft.
Relay output wiring	x		2 wire (18-24 AWG)	Up to 2500 ft.
Exit Request (REX)	x		2 wire (18-24 AWG)	Up to 500 ft.
Supervised Input	x		2 wire (18-24 AWG)	Up to 500 ft.
RJ-45 Internet	x		CAT5e or better 8 strand (24 AWG)	Up to 328 ft.
Wi-Fi		x	N/A	Up to 250 ft.**
Postal Lock (Optional w/Backplate)	x		Included	N/A