
AIP HONG KONG 23 JAN 25

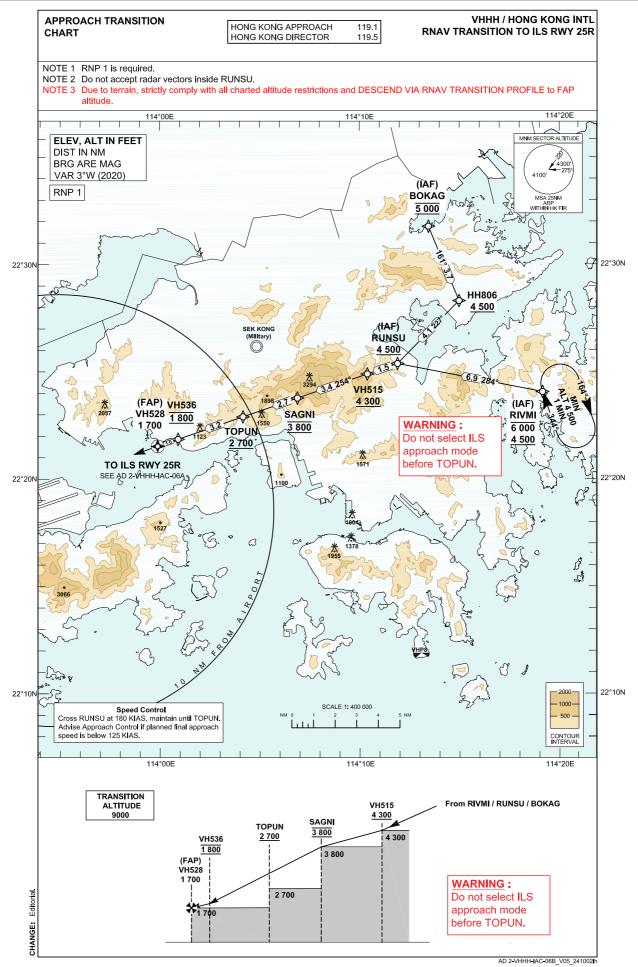

RNAV Transition to ILS RWY 25R

TABULAR DESCRIPTION: RNAV Transition from RIVMI

Serial Number	Path Descriptor	Waypoint Identifier	Fly- over	Course °M (°T)	Magnetic Variation		Turn Direction	Altitude (ft)	Speed (KIAS)	VPΔ	Navigation Specification
01	IF	RIVMI	-	-	+3.0	-	-	-6000 +4500	-	-	RNP 1
02	TF	RUNSU	-	284 (281)	+3.0	6.9	-	+4500	@180	-	RNP 1
03	TF	VH515	-	254 (251)	+3.0	1.5	-	+4300	@180	-	RNP 1
04	TF	SAGNI	-	254 (251)	+3.0	3.4	-	@3800	@180	-	RNP 1
05	TF	TOPUN	-	254 (251)	+3.0	2.7	-	+2700	@180	-	RNP 1
06	TF	VH536	-	254 (251)	+3.0	3.2	9	@1800	-	-	RNP 1
07	TF	VH528	-	254 (251)	+3.0	1.0	1-0	-	@160	-	RNP 1

TABULAR DESCRIPTION: RNAV Transition from RUNSU

Serial Number	Path Descriptor	Waypoint Identifier	Fly- over		Magnetic Variation		Turn Direction	Altitude (ft)	Speed (KIAS)	VPΔ	Navigation Specification
01	IF	RUNSU	-	-	+3.0	9	-	+4500	@180	-	RNP 1
02	TF	VH515	-	254 (251)	+3.0	1.5	-	+4300	@180	į	RNP 1
03	TF	SAGNI	-	254 (251)	+3.0	3.4	-	@3800	@180	-	RNP 1
04	TF	TOPUN	-	254 (251)	+3.0	2.7	-	+2700	@180	-	RNP 1
05	TF	VH536	-	254 (251)	+3.0	3.2	-	@1800	-	-	RNP 1
06	TF	VH528	ī	254 (251)	+3.0	1.0	ı		@160	1	RNP 1

TABULAR DESCRIPTION: RNAV Transition from BOKAG

Serial Number	Path Descriptor	Waypoint Identifier	Fly- over	Course °M (°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (ft)	Speed (KIAS)	VPA	Navigation Specification
01	IF	BOKAG	-	-	+3.0	:-:	-	@5000	@210	-	RNP 1
02	TF	HH806	-	161 (158)	+3.0	3.7	-	+4500	-	-	RNP 1
03	TF	RUNSU	-	227 (224)	+3.0	4.1	-	+4500	@180	-	RNP 1
04	TF	VH515	-	254 (251)	+3.0	1.5	-	+4300	@180	-	RNP 1
05	TF	SAGNI	-	254 (251)	+3.0	3.4	-	@3800	@180	-	RNP 1
06	TF	TOPUN	-	254 (251)	+3.0	2.7	-	+2700	@180	-	RNP 1
07	TF	VH536	-	254 (251)	+3.0	3.2	i-i	@1800	-	-	RNP 1
08	TF	VH528	-	254 (251)	+3.0	1.0	-	-	@160	-	RNP 1

WAYPOINT LIST

RNAV Transition to ILS RWY 25R								
Waypoint Identifier	Coordinates (WGS-84)							
RIVMI (IAF)	22 24 03.96N	114 19 09.28E						
BOKAG (IAF)	22 31 46.65N	114 13 27.06E						
HH806	22 28 18.61N	114 14 58.76E						
RUNSU (IAF)	22 25 22.96N	114 11 53.57E						
VH515	22 24 53.87N	114 10 22.72E						
SAGNI	22 23 46.63N	114 06 52.68E						
TOPUN	22 22 54.17N	114 04 09.15E						
VH536	22 21 51.55N	114 00 54.18E						
VH528 (FAP)	22 21 31.88N	113 59 52.97E						