

**INSTRUMENT APPROACH CHART-ICAO** **ZBAA BEIJING/Capital**  
 VAR7.5°W AERODROME ELEV 35.3 D-ATIS(English) 128.65  
 THR RWY36R ELEV 29.9 D-ATIS(Chinese) 127.6  
 TWR02 118.5(118.05) CAT-I/II/IIIA ILS/DME y RWY36R RNAV

VAR7.5° W

AERODROME ELEV 35.3  
THR RWY36R ELEV 29.9

D-ATIS(English) 128.65

D-ATIS(Chinese) 127.6

TWR02 118.5(118.05)

CAT-I/II/IIIA ILS/DME y <sup>RNAV</sup> RWY36R

BEARINGS ARE MAGNETIC.  
ALTITUDES, ELEVATIONS  
AND HEIGHTS IN METERS.  
DME DISTANCES IN  
NAUTICAL MILES.  
DISTANCES IN KM.

Notes:

1. Independent approaches emergency avoidance:  
for A/C on final, climb up along final course  
and maintain 2100, contact 127.75MHz.

2. When approaching on final course, A/C should keep IAS no less than 180kt until 8NM from the touch down point.

APP01 126.1(125.05)  
APP02 119.0(125.05)  
APP03 120.2(125.05)  
APP09 121.1(127.75)  
APP10 129.0(127.75)  
APP11 119.7(127.75)  
APP12 119.85(119.425)  
APP13 121.25(119.425)  
APP14 126.3(119.425)  
APP15 125.8(119.425)  
APP16 124.4(127.75)  
APP17 120.6(127.75)  
APP18 125.5(119.425)

GUANZHUANG  
114.7 PEK  
CH 94X

No aircraft is permitted to maneuver or circumnavigate CB in Prohibited Fly Over Area

ILS  
001° 111.55 IQU

GP INOP	DME (IQU) (NM)	1	2	3	4	5	6	7
	ALT (m)		224	321	418	515		


### MISSED APPROACH

Climb straight ahead to AA131 at 900 or above, turn RIGHT and fly to AA130, continue to turn RIGHT and fly to PEK at 900-1500, join the holding pattern, or by ATC.

TA 3000

3300(QNH  $\geq 1031$ hPa)

2700(QNH ≤ 979hPa)

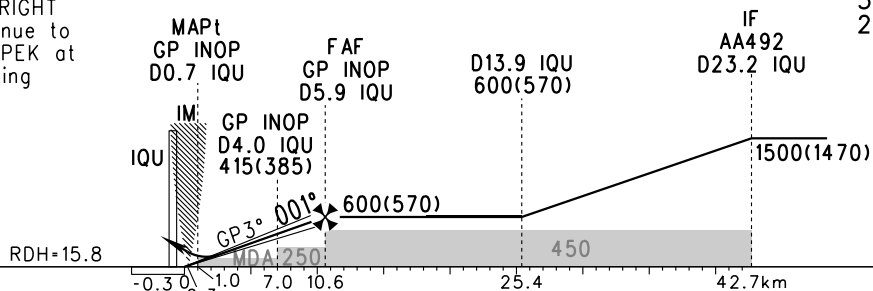

ILS/DME		DA(H) RVR/VIS A	90(60) 550/800			
GP INOP		MDA(H) RVR/VIS	130(100) 1100/1100		130(100) 1200/1200	
Aircraft type	Decision height (DH)	Radio altimeter	Autopilot to DH and below		Manual operation below DH	
ILS CAT II						
A,B,C	(30)	(33)	RVR300		RVR300	
D					RVR350	
ILS CAT IIIA						
A,B,C,D	(15)	(15)	RVR175			

FAF-MAPT(GP INOP) 9.6km							
GS in	kt km/h	80 150	100 185	120 220	140 260	160 295	180 335
Time	min:sec	3:53	3:07	2:36	2:13	1:57	1:44
Rate of descent	m/s	2.2	2.7	3.2	3.8	4.3	4.9

A HUD Special CAT I: (DH)(45),(RA)(48),RVR450

Changes: Procedure.

● HUD Special CAT I: (DH)(45),(RA)(48),RVR450

*Changes: Procedure.*