OpenClaw WebChat Interaction

OpenClaw WebChat Interaction

- Accessing Directly in VNC
- Accessing from Other Hosts on the Local Network
  1. Modify the OpenClaw configuration file to allow other devices on the LAN to access OpenClaw
  2. Start the Gateway
  3. Get the access Token
  4. Establish an SSH tunnel on the PC and access it

Accessing Directly in VNC


First connect to the terminal of the host and enter

```
openclaw gateway
```

Next we need to get the openclaw access token. In another terminal, enter

```
openclaw dashboard
```

This command displays the token once, or you can find the ~/.openclaw/openclaw.json file; your token is configured in this file

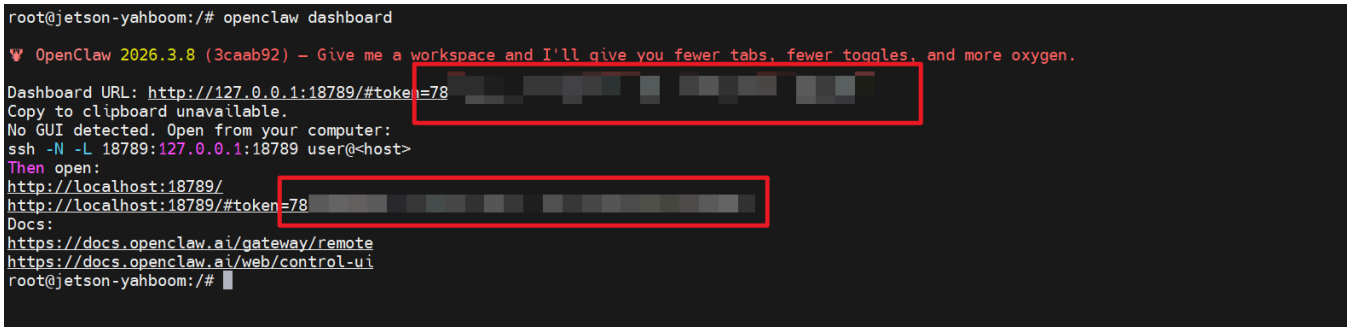

We connect to the system where the board is located via VNC, then open the browser and enter the link given in the dashboard

Accessing from Other Hosts on the Local Network

> If no other computer is available, we can use OpenClaw's TUI tool and operate it from the terminal in command line mode; see the TUI usage section later in this document for the detailed steps.

> Common issue note: please use a recent version of the Edge or Chrome browser; other browsers may report a 4008 error.

1. Modify the OpenClaw configuration file to allow other devices on the LAN to access OpenClaw

```
openclaw config
```

Here we make our selections the way shown in the figure below (use the Up/Down arrow keys to select and press Enter to confirm)

> Except for the Token, which may differ from the one in our figure, everything else must be the same. The key item is the Gateway bind mode option; we need to set it to LAN, so that other devices on our LAN can access our OpenClaw



Finally we select Continue to confirm and press Enter, and the configuration is complete!



2. Start the Gateway

After the configuration is complete, first start the OpenClaw Gateway. Open another terminal and enter the following in the terminal


```
openclaw gateway
```

3. Get the access Token

The Token here is the one generated during the configuration we just did. If you did not write it down, you can use

```
openclaw dashboard
```


This command displays the token once, or you can find the ~/.openclaw/openclaw.json file; your token is configured in this file

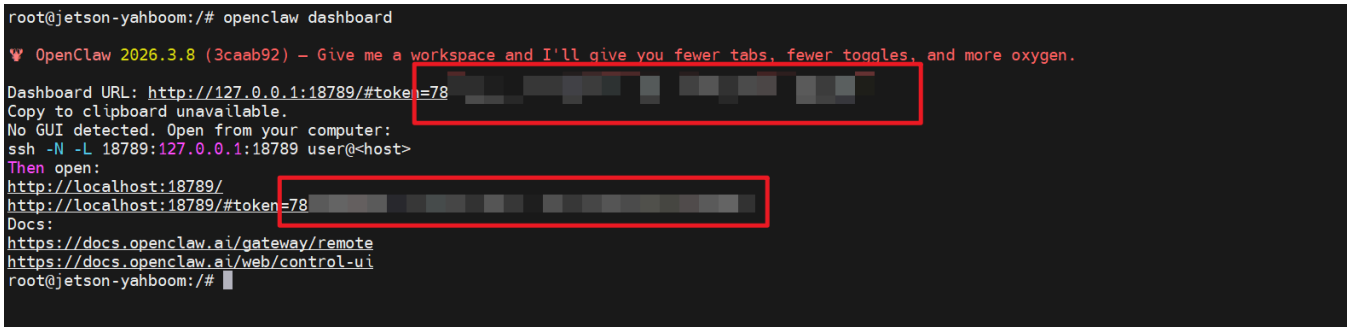

4. Establish an SSH tunnel on the PC and access it

On a PC in the same LAN, configure the environment for connecting to the Jetson.

Open the Cmd terminal on the computer (taking a Windows PC as an example, press Win+R to bring up the Run utility, type cmd, and then press Enter)




Enter the following in the console

```
ssh -L 18789:127.0.0.1:18789 jetson@<jetson-ip-address>
```

Note: here must be replaced with the actual IP address of your Jetson board

After pressing Enter you need to enter the password (the default is yahboom)

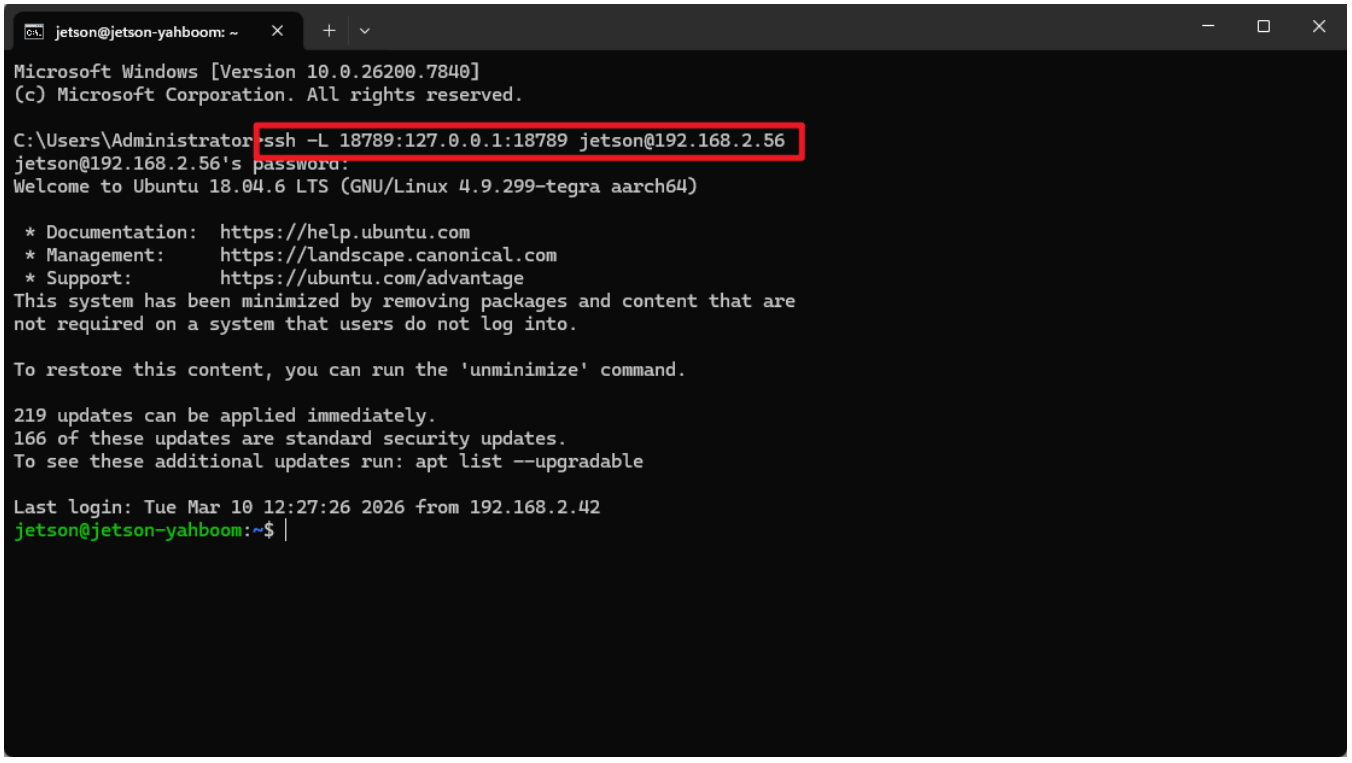

When this screen appears, it means you have successfully connected to the Jetson

Open the browser on the PC and enter the address consisting of the IP address and the token (the address output by openclaw onboard just now, <http://127.0.0.1:18789/#token=xxxxxxxxxxxx). When this interface appears, it means the deployment was successful!>

