# k230DM code recognition

#### k230DM code recognition

k230 and PICO2 communication

- 1. Experimental Prerequisites
- 2. Experimental wiring
- 3. Main code explanation
- 4. Experimental Phenomenon

#### k230 and PICO2 communication

## 1. Experimental Prerequisites

This tutorial uses the PICO2 development board, and the corresponding routine path is [14.export\PICO-K230\05\_pico\_k230\_dmcode.py].


k230 needs to run the [14.export\CanmvIDE-K230\05.find\_datamatrices.py] program to start the experiment. It is recommended to download it as an offline program.

Things you need:

Windows computer
PICO2 development board
microUSB cable
K230 visual module (including TF card with image burned in)
type-C cable
connection cable

# 2. Experimental wiring

k230 vision module	PICO2 Development Board
5V	VCC
GND	GND
TXD(IO9)	RXD(GP9)
RXD(IO10)	TXD(GP8)

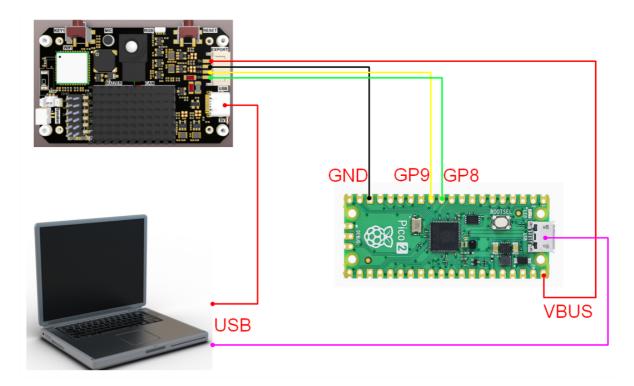

### 3. Main code explanation

```
from machine import UART, Pin
FUNC_ID = 5
uart1 = UART(1, baudrate=115200, tx=Pin(8), rx=Pin(9), bits=8, parity=None,
stop=0)
print("hello yahboom")
def parse_data(data):
    if data[0] == ord('\$') and data[len(data)-1] == ord('\#'):
        data_list = data[1:len(data)-1].decode('utf-8').split(',')
        data_len = int(data_list[0])
        data_id = int(data_list[1])
        if data_len == len(data) and data_id == FUNC_ID:
            # print(data_list)
            x = int(data_list[2])
            y = int(data_list[3])
            w = int(data_list[4])
            h = int(data_list[5])
            msg = data_list[6]
            degrees = int(data_list[7])
            return x, y, w, h, msg, degrees
        elif (data_len != len(data)):
            print("data len error:", data_len, len(data))
        elif(data_id != FUNC_ID):
            print("func id error:", data_id, FUNC_ID)
    return -1, -1, -1, -1, "", -1
last_data = bytearray()
while True:
    if uart1.any() > 0:
```

```
cur_data = uart1.readline()
# print("rx:", cur_data)
if ord('\n') in cur_data:
    # data = bytearray(last_data + cur_data.decode('utf-8'), 'utf-8')
    data = last_data + cur_data
    last_data = bytearray()
    x, y, w, h, msg, degrees = parse_data(data.rstrip(b'\n'))
    print("dmcode:x:%d, y:%d, w:%d, h:%d, msg:%s, degrees:%d" % (x, y, w, h, msg, degrees))
    else:
    last_data = last_data + cur_data
```


The above program is for parsing K230 data. Only when it complies with specific protocols can the corresponding data be parsed.

in

- x: is the horizontal coordinate of the upper left corner of the recognized box
- y: is the vertical coordinate of the upper left corner of the recognized box
- w: is the width of the recognized frame
- h: is the length of the recognized frame
- msg: is the content of the DM code
- Degrees: is the rotation angle of the DM code

#### 4. Experimental Phenomenon

1. After connecting the cables, the k230 visual module runs offline. After K230 is connected to Canmv IDE, open the corresponding program, click [Save open script to CanMV board (as main.py)] on the toolbar, and then restart K230.

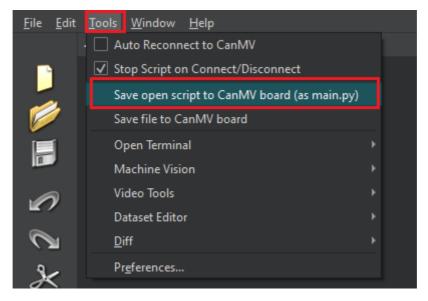

- 2. Open the Thonny editor, connect the PICO2 mainboard, open the program file and run it. Note: The PICO2 mainboard needs to have the microPython firmware downloaded in advance.
- 3. When the K230 camera screen recognizes the DM code, the terminal will parse and print out the information transmitted by the K230.

in

• x: is the horizontal coordinate of the upper left corner of the recognized box

- y: is the vertical coordinate of the upper left corner of the recognized box
- w: is the width of the recognized frame
- h: is the length of the recognized frame
- msg: is the content of the DM code
- Degrees: is the rotation angle of the DM code

As shown in the figure below

```
[2025-04-30 11:42:09.995]# RECV ASCII>
dmcode:x:184, y:49, w:224, h:302, msg:'This is Data Matrix!', degress:0

[2025-04-30 11:42:10.105]# RECV ASCII>
dmcode:x:185, y:48, w:224, h:303, msg:'This is Data Matrix!', degress:1
dmcode:x:185, y:50, w:224, h:302, msg:'This is Data Matrix!', degress:0

[2025-04-30 11:42:10.215]# RECV ASCII>
dmcode:x:185, y:50, w:224, h:302, msg:'This is Data Matrix!', degress:0
dmcode:x:187, y:51, w:223, h:301, msg:'This is Data Matrix!', degress:0

[2025-04-30 11:42:10.262]# RECV ASCII>
dmcode:x:189, y:49, w:224, h:301, msg:'This is Data Matrix!', degress:0

[2025-04-30 11:42:10.327]# RECV ASCII>
dmcode:x:193, y:43, w:223, h:301, msg:'This is Data Matrix!', degress:0
```