

Steering Decision

1. Course Content

Note: This program runs on a sandbox map; you will need to adjust the program for your personal map.

1. Learn the actions the car takes after recognizing right turn
2. Learn the newly emerged key source code

2. Road Sign Detection

Road sign detection source code path:

```
/home/jetson/yahboomcar_auto/src/auto_driver/scripts/auto_drive.py
```

3. Program Startup

3.1 Startup Command

- Parameter Configuration

Parameter path:

```
/home/jetson/yahboomcar_auto/src/auto_driver/config/auto_drive_node.yaml
```

```
turn_radius: 0.4
linear_speed: 0.13
angular_speed: -0.55
duration: 2.0
response_distance_1: 2900
response_distance_2: 132
cooldown_time: 0.2
DEBUG_MODE: False
DEBUG_MODE_2: True
START_AutoDrive: True
Kp: -0.62
Ki: 0.0
Kd: -0.1
max_integral: 1000.0
image_size: [640, 480]
```

After modifying parameters, restart the launch file to use the modified parameters.

- Start camera + chassis + autonomous driving node (need to run in virtual environment terminal)


```
roslaunch auto_driver auto_drive.launch
```

```
(yolov11) jetson@yahboom:~$ roslaunch auto_driver auto_driver.launch
... logging to /home/jetson/.ros/log/2add7f36-d0c0-11f0-9d82-48b02d5ab21e/roslaunch-yahboom-15809.log
Checking log directory for disk usage. This may take a while.
Press Ctrl-C to interrupt
Done checking log file disk usage. Usage is <1GB.

started roslaunch server http://yahboom:44059/

SUMMARY
=====
PARAMETERS
* /ascamera_hp60c/color_pcl: False
* /ascamera_hp60c/confiPath: /home/jetson/yahb...
* /ascamera_hp60c/depth_height: 480
* /ascamera_hp60c/depth_width: 640
* /ascamera_hp60c/fps: 30
* /ascamera_hp60c/pub_mono8: False
* /ascamera_hp60c/pub_tfTree: True
* /ascamera_hp60c/rgb_height: 480
* /ascamera_hp60c/rgb_width: 640
* /ascamera_hp60c/usb_bus_no: -1
* /ascamera_hp60c/usb_path: null
* /auto_driver/DEBUG_MODE: False
* /auto_driver/DEBUG_MODE_2: True
* /auto_driver/Kd: -0.1
* /auto_driver/Ki: 0.0
* /auto_driver/Kp: -0.62
* /auto_driver/START_AutoDrive: False
* /auto_driver/angular_speed: -0.55
* /auto_driver/cooldown_time: 0.2
* /auto_driver/duration: 2.0
* /auto_driver/image_size: [640, 480]
* /auto_driver/linear_speed: 0.13
* /auto_driver/max_integral: 1000.0
* /auto_driver/response_distance_1: 2900
* /auto_driver/response_distance_2: 132
* /auto_driver/turn_radius: 0.4
* /auto_driver/turn_speed: 0.4
```


After successful startup, the display will not move to test road sign recognition. (If you want it to move, change the parameter START_AutoDrive in auto_drive_node.yaml to True)

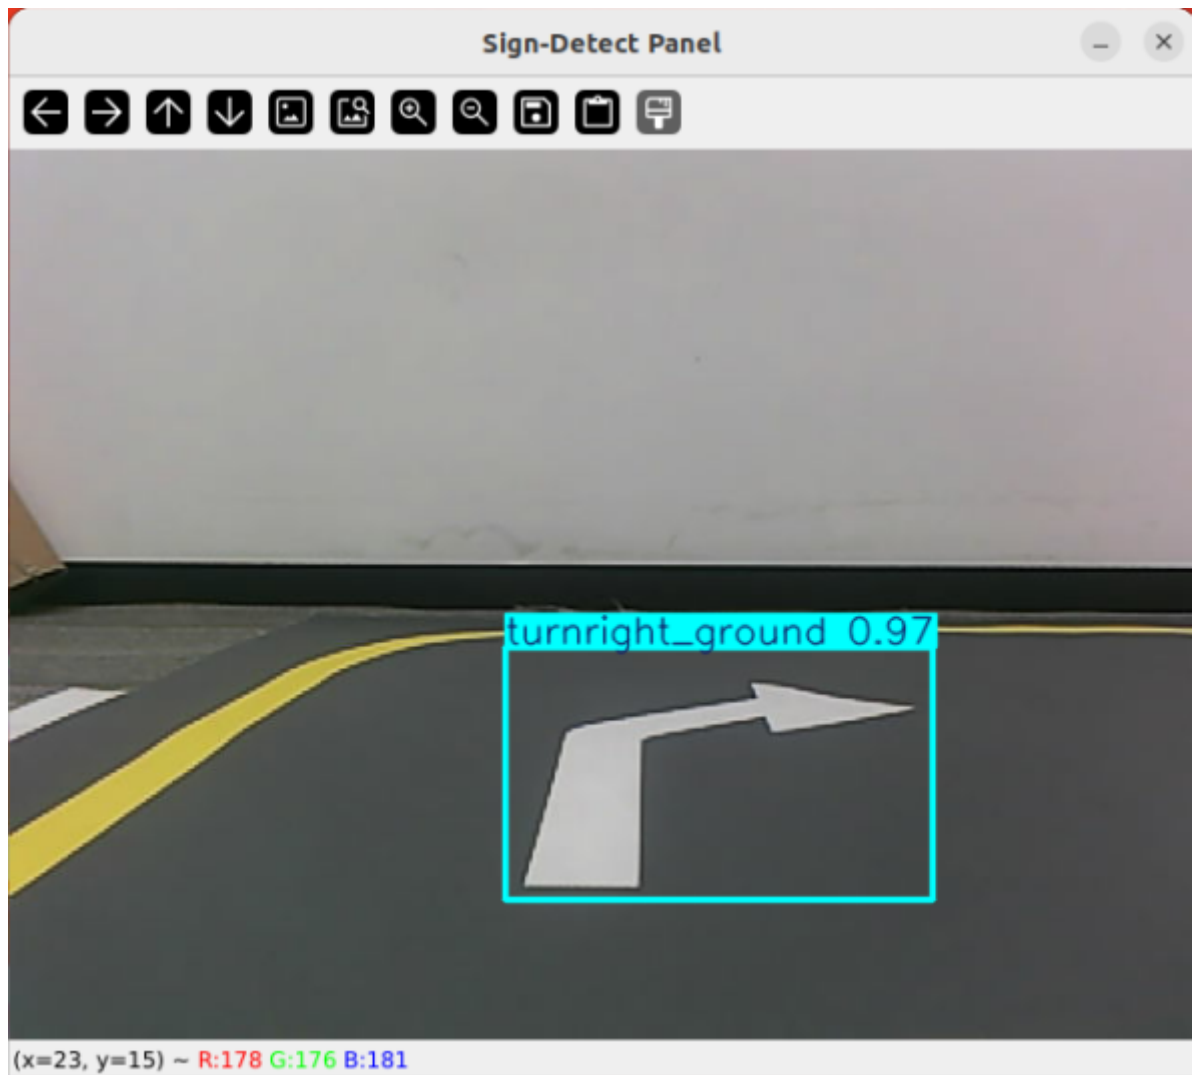

After the program runs, it will display the YOLO recognition screen. The car will run centered on the lane lines and perform corresponding actions based on the road signs recognized during driving.

3.2 Car movement after recognizing right turn


Note: Because right turn uses fixed actions, the right turn and parking A signs need to be placed at fixed positions

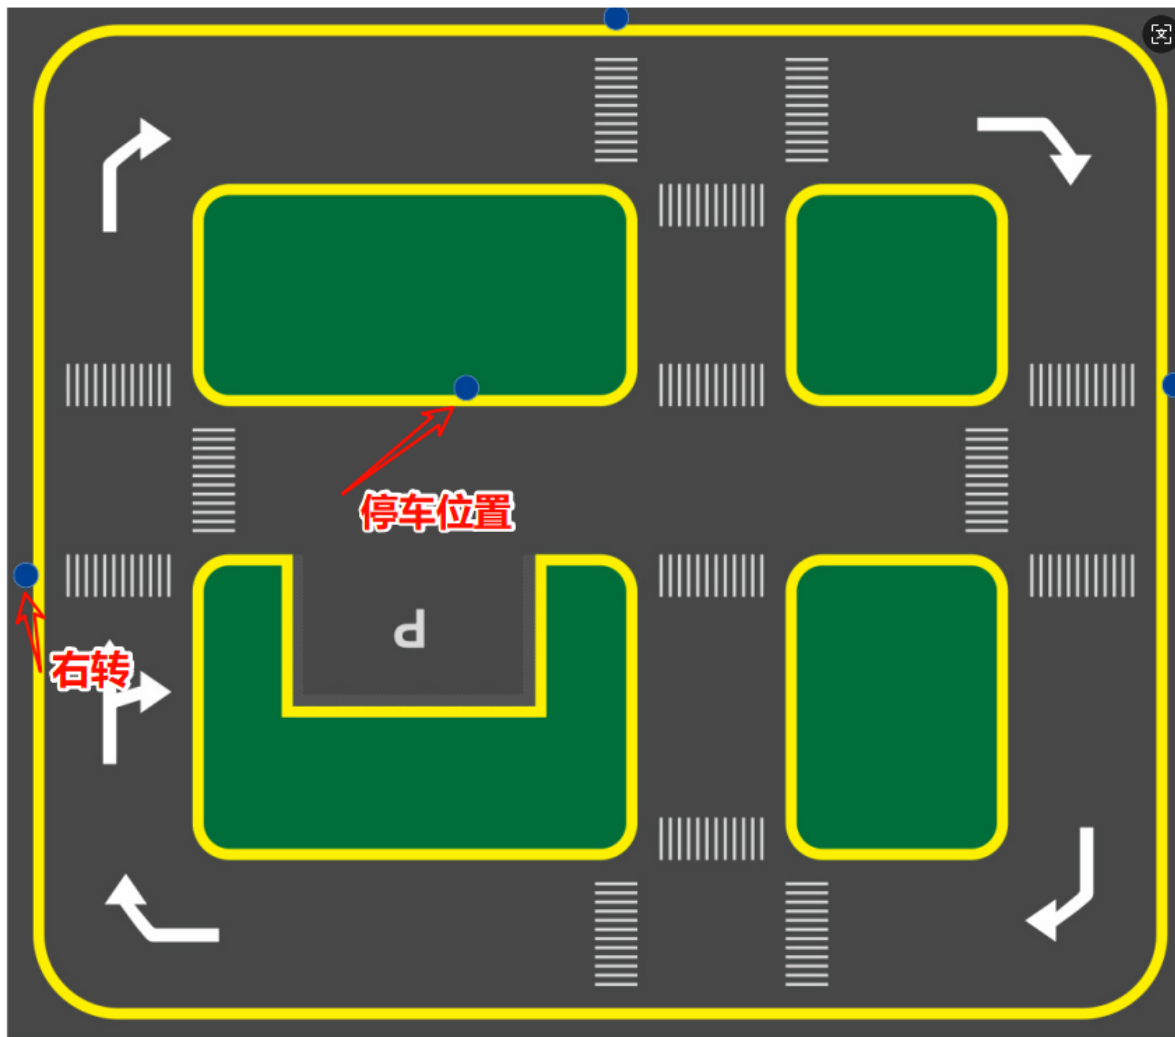

When the program recognizes right turn, the program will print

```
jetson@yahboom: ~  
jetson@yahboom: ~ 80x24  
MiB)  
[yolo_detect-3] [12/02/2025-18:29:35] [TRT] [I] [MemUsageChange] TensorRT-manage  
d allocation in IExecutionContext creation: CPU +0, GPU +19, now: CPU 0, GPU 28  
(MiB)  
[auto_drive-4] [INFO] [1764671378.387579116] [auto_drive]: current_sign redlight  
[auto_drive-4] [INFO] [1764671378.390984163] [auto_drive]: red_stop  
[auto_drive-4] [INFO] [1764671832.607130196] [auto_drive]: current_sign greenlig  
ht  
[auto_drive-4] [INFO] [1764671832.608561506] [auto_drive]: greenlight  
[auto_drive-4] [INFO] [1764673308.321102763] [auto_drive]: current_sign parkA  
[auto_drive-4] [INFO] [1764673308.323742671] [auto_drive]: parking A  
[auto_drive-4] [INFO] [1764674001.122264527] [auto_drive]: current_sign speedlim  
it  
[auto_drive-4] [INFO] [1764674001.122991778] [auto_drive]: slow down  
[auto_drive-4] [INFO] [1764674013.459037728] [auto_drive]: current_sign stop  
[auto_drive-4] [INFO] [1764674016.463009335] [auto_drive]: Stop action completed  
[auto_drive-4] [INFO] [1764674377.727182525] [auto_drive]: current_sign turnrigh  
t  
[auto_drive-4] [INFO] [1764674377.728323130] [auto_drive]: Turn action preparing  
: right, waiting 2 seconds  
[auto_drive-4] [INFO] [1764674377.729364725] [auto_drive]: Turn action started:  
right  
[auto_drive-4] [INFO] [1764674378.732186552] [auto_drive]: turn right
```

The car will execute fixed actions for steering decision. When seeing right turn, it will stop for one second, then move forward for 5 seconds and turn right.

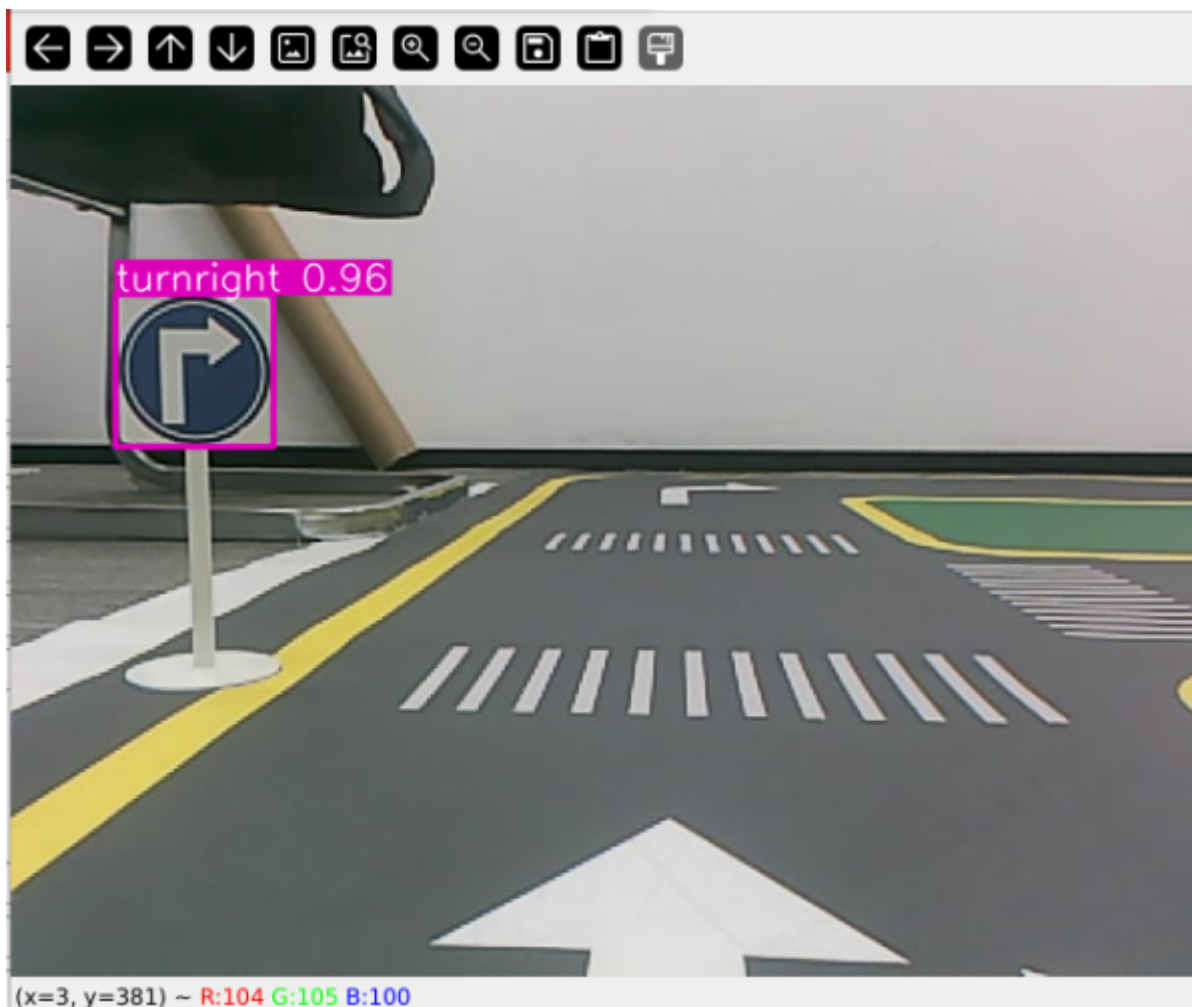

The steering decision handling function is in the auto_drive.py file. Below is the function that is entered after recognizing right turn. Users can modify the car's movement after recognizing the road sign themselves

```

def turn(self, direction):
    rospy.loginfo(f'Turn {direction}')
    if self.R == 0:
        angular_z = self.angular_speed if direction == 'left' else -
self.angular_speed
        self._set_current_speed(angular_z=angular_z)
    else:
        self.flag = True
        # rospy.loginfo(f"angular_z : {angular_z}")
        self._set_current_speed(linear_x=0.0, angular_z=0.0)
        time.sleep(1)
        self._set_current_speed(linear_x=self.drive_speed, angular_z=-0.05)
        time.sleep(5)
        self._set_current_speed(linear_x=self.drive_speed, angular_z=-0.55)
        time.sleep(2.3) #Can modify turning time yourself
        self.flag = False

    time.sleep(self.duration)
    self._set_current_speed(linear_x=self.drive_speed, angular_z=0.0)

```

4. Source Code Analysis

4.1, auto_drive.py

YOLO signpost message reception:

```

results = self.sign_detect.get_infer_result(frame, True)
annotated_frame = frame.copy()

```

Multiple filtering mechanisms: mainly to prevent continuously recognizing road signs and triggering actions; the action will only be unlocked when different road signs are recognized.

```

# If a sign that requires cooldown is detected, start cooldown
if detected_sign_requires_cooldown:
    self.sign_cooldown = True
    self.last_sign_time = current_time
    rospy.loginfo(f'Sign detected, starting {self.cooldown_duration}s cooldown")
# Check if the repeated sign should be ignored
should_ignore = False
if obj.class_name == self.last_sign:
    should_ignore = True

```

Event queue processing

```

def _event_handling_worker(self):
    '''Event handling worker thread'''
    # Sign handling mapping table
    sign_handlers = {
        "straight": self.go_straight,
        "turnright": lambda: self.turn('right'),
        "turnright_ground": self.do_nothing,
        "honking": self.car_horn,
        "sidewalk": self.slow_down,
        "sidewalk_ground": self.do_nothing,
        "speedlimit": self.slow_down,
    }

```

```

        "stop": self.stop,
        "school": self.school,
        "parkA": self.parking_A,
        "parkB": self.parking_A,
        "greenlight": self.go_straight,
        "redlight": self.red_stop,
        "yellowlight": self.stop,
        "out_park": self.out_parking
    }

    # sign enable index mapping
    sign_enable_map = {
        "straight": 10, "turnright": 11, "honking": 1, "sidewalk": 6,
        "sidewalk_ground": 7, "speedlimit": 8, "stop": 9, "school": 5,
        "parkA": 2, "parkB": 3, "greenlight": 0, "redlight": 4,
        "yellowlight": 13
    }

```

Specific action implementation

```

def turn(self, direction):
    rospy.loginfo(f'Turn {direction}')
    if self.R == 0:
        angular_z = self.angular_speed if direction == 'left' else -
self.angular_speed
        self._set_current_speed(angular_z=angular_z)
    else:
        self.flag = True
        # rospy.loginfo(f"angular_z : {angular_z}")
        self._set_current_speed(linear_x=0.0, angular_z=0.0)
        time.sleep(1)
        self._set_current_speed(linear_x=self.drive_speed, angular_z=-0.05)
        time.sleep(5)
        self._set_current_speed(linear_x=self.drive_speed, angular_z=-0.55)
        time.sleep(2.3) #Can modify turning time yourself
        self.flag = False

    time.sleep(self.duration)
    self._set_current_speed(linear_x=self.drive_speed, angular_z=0.0)

```