

Proficient Carrier Transportation

1.Learning goals

In this lesson, we mainly learn how to control building block motor and RGB lights by micro:bit and Super:bit expansion board.


2.Programming method


Mode 1 online programming: First, we need to connect the micro:bit to the computer by USB cable. The computer will pop up a USB flash drive and click on the URL in the USB flash drive: <http://microbit.org/> to enter the programming interface. Add the Yahboom package <https://github.com/lzty634158/SuperBit> to program.

Mode 2 offline programming: We need to open the offline programming software. After the installation is complete, enter the programming interface, click 【New Project】 , add Yahboom package: <https://github.com/lzty634158/SuperBit>, you can program.

3.Looking for blocks


The following is the location of the building blocks required for this programming.

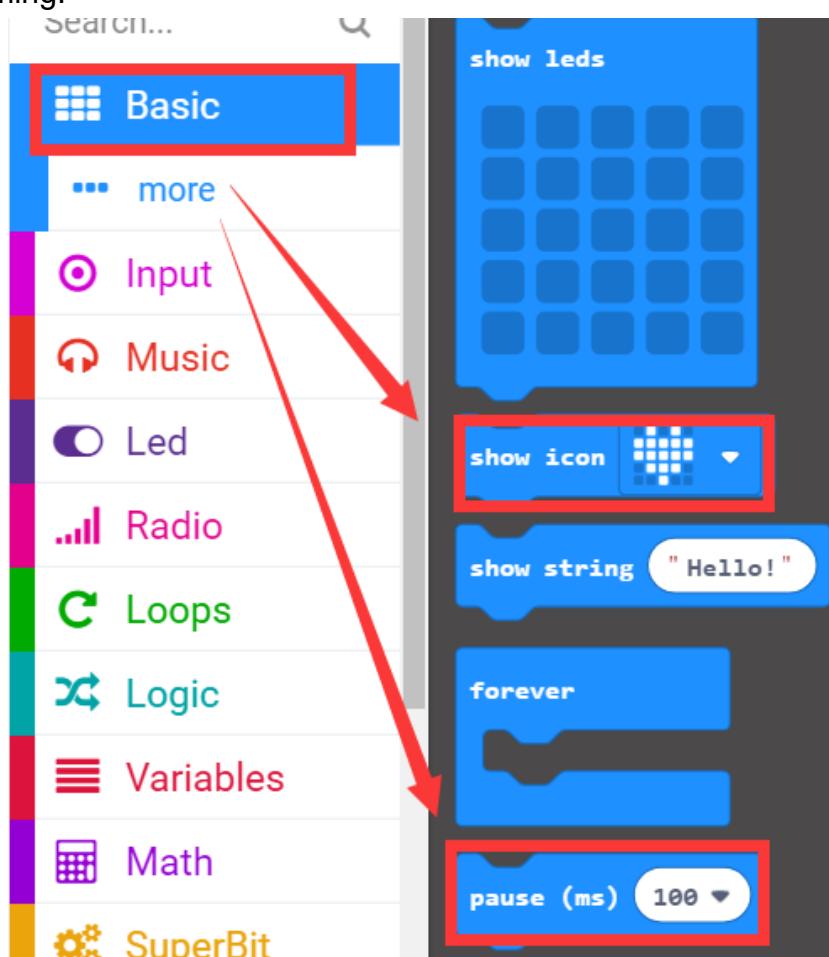


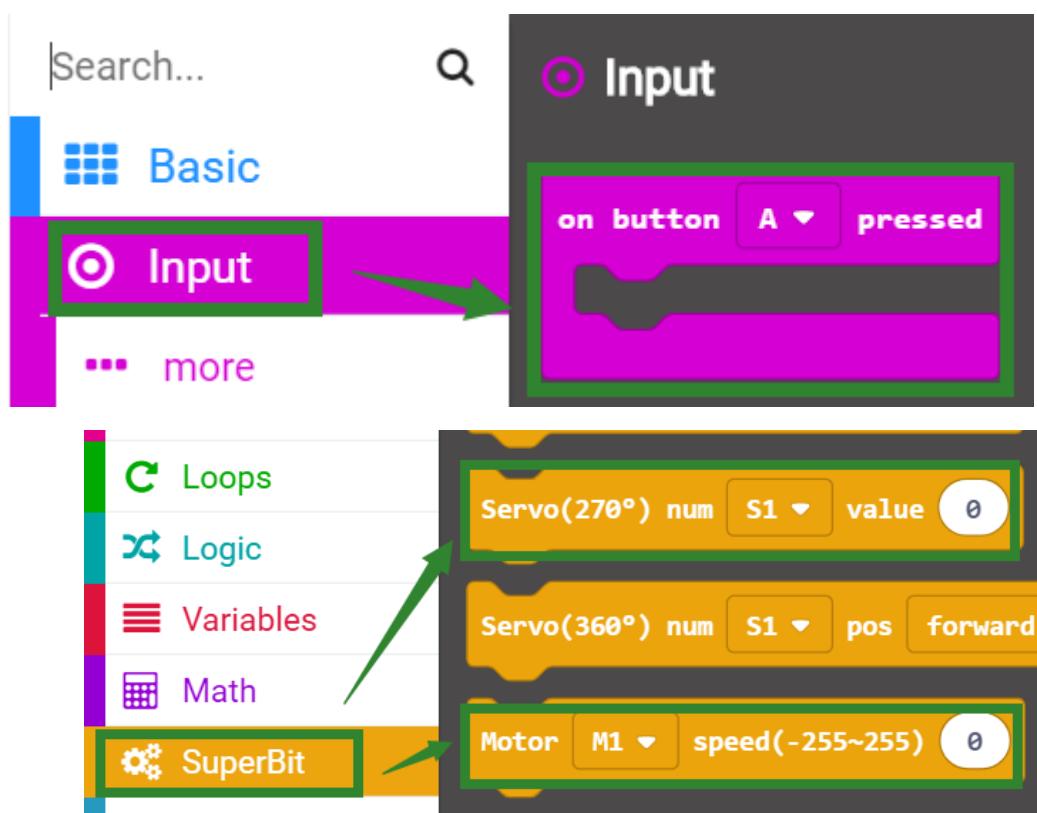

4. Combine building block

The summary program is shown below:

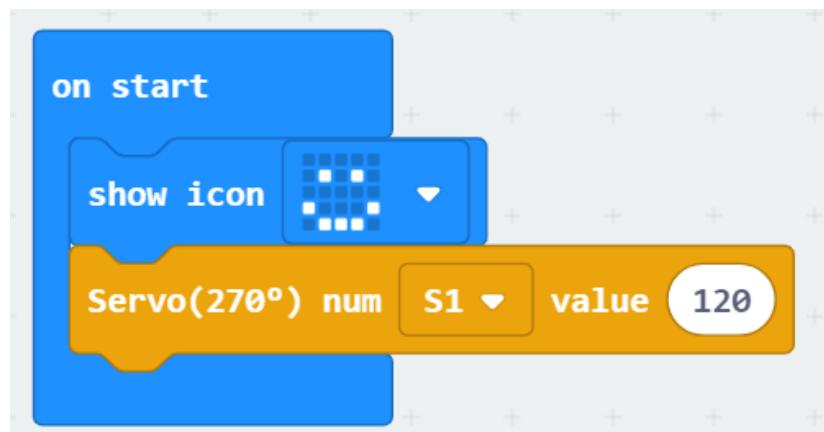

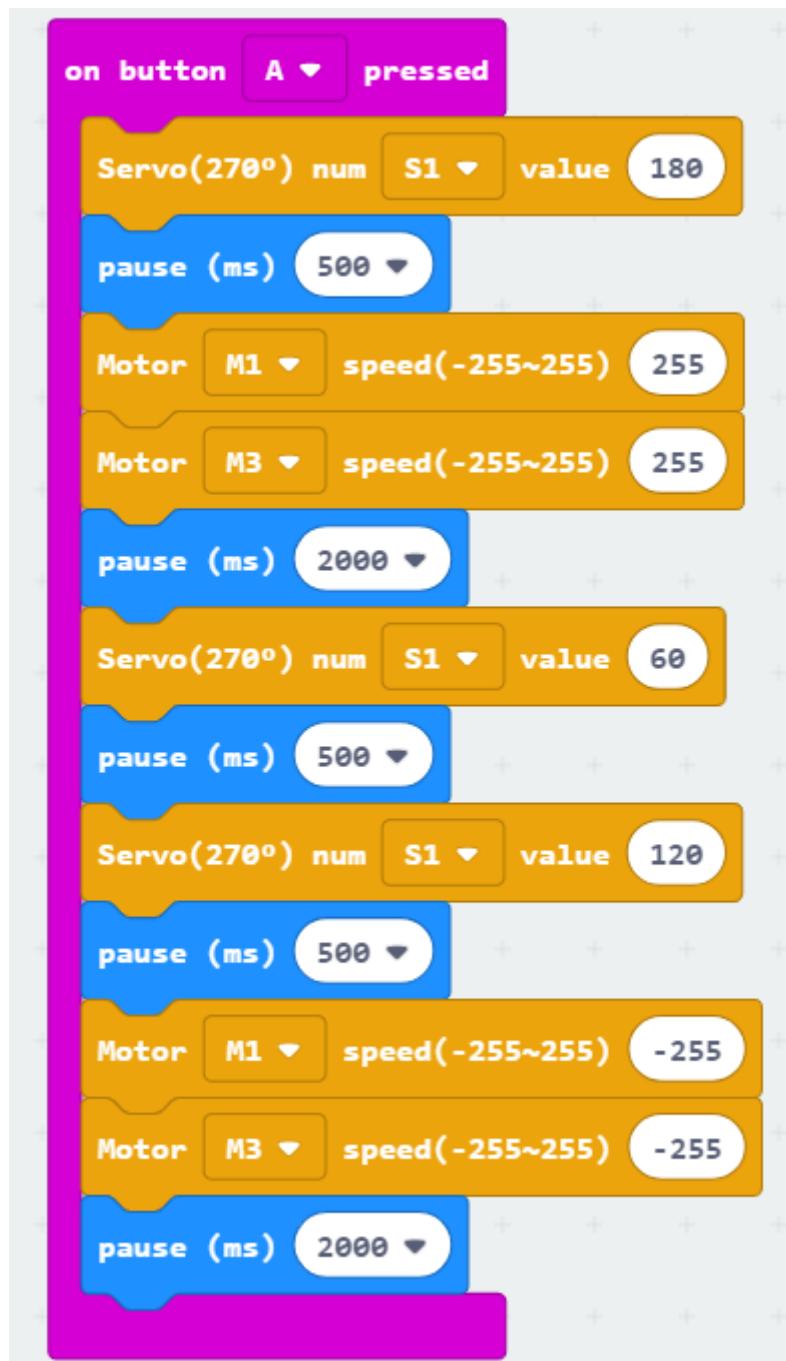

5.Assembly steps

Please refer to the **Proficient Carrier assembly steps** in the **Assembly instructions** folder for building blocks assembly steps.


6.About wiring:

As shown below,

Left motor connect to M1 interface of super:bit.

Right motor connect to M3 interface of super:bit.

Servo connect to S1 interface of super:bit.

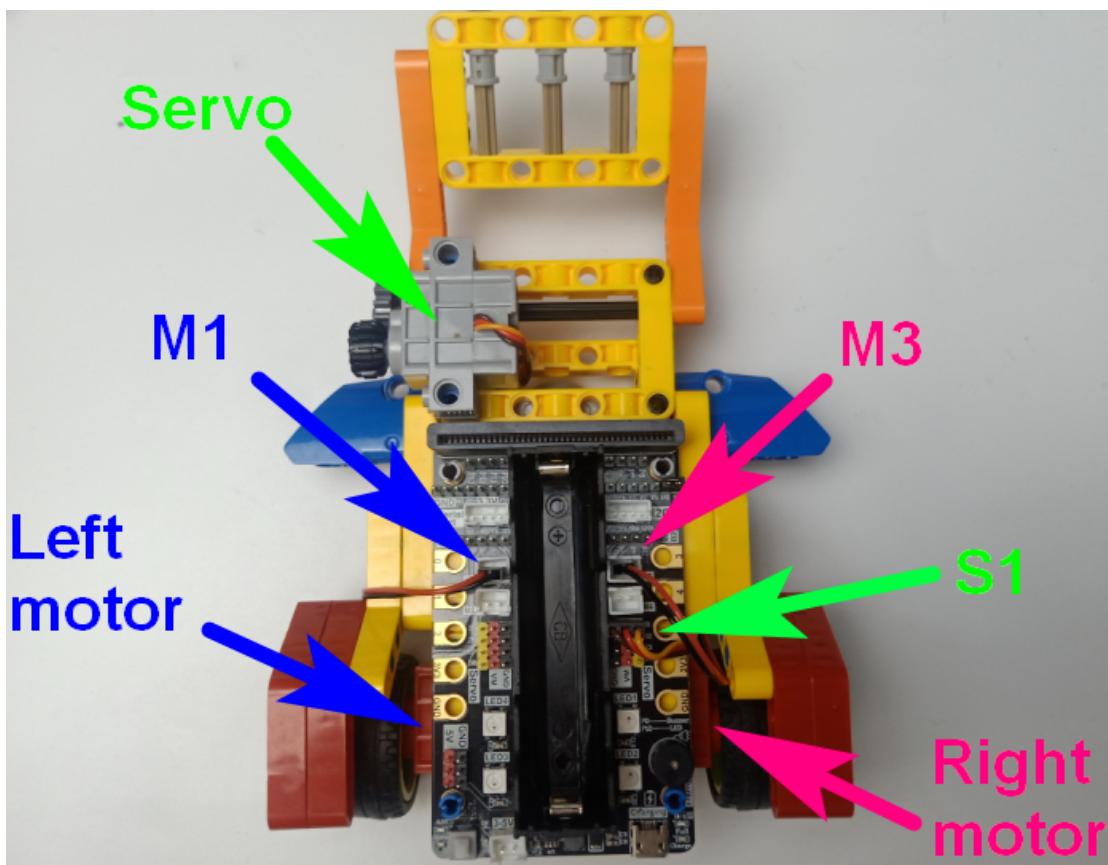

!!!Note:When using the program related to the building block servo for the first time.

First, we need to remove the gear on the building block servo. Then, download the program to micro:bit. Next, turn on the power of the Super:bit expansion board and wait for the building block servo to turn to the initial position and turn off the power. Finally, we need to open the trolley clip to the widest point, and then install the gear on the building block servo.

7. Experimental phenomena

After the program is successfully downloaded, the micro:bit dot matrix will display a smile and the shovel will flat;

Press the micro:bit A key, the clip lift -> advance 2s -> unload goods -> clip flat -> back 2s.

If you need to start over, press the reset button on the back of the micro:bit board.