

REPORT - CISPR 32 CLASS B band B

Test Conditions

EUT: E-Type

Manuf: VFD015E43A

Op Cond:

Operator:

Test Spec: C1-50M

Date (YYYY/MM/DD): 2026/07/20

Comments: MP Sample
0720

Scan Settings

Instrument: EMScope

Software version: 3.09

EMSCOPE SN: 0341101000417009


Freq start: 0.15 MHz

Freq stop: 30 MHz

RBW: 9 kHz

Losses: NNLK 8121

Dwell time: 1 sec

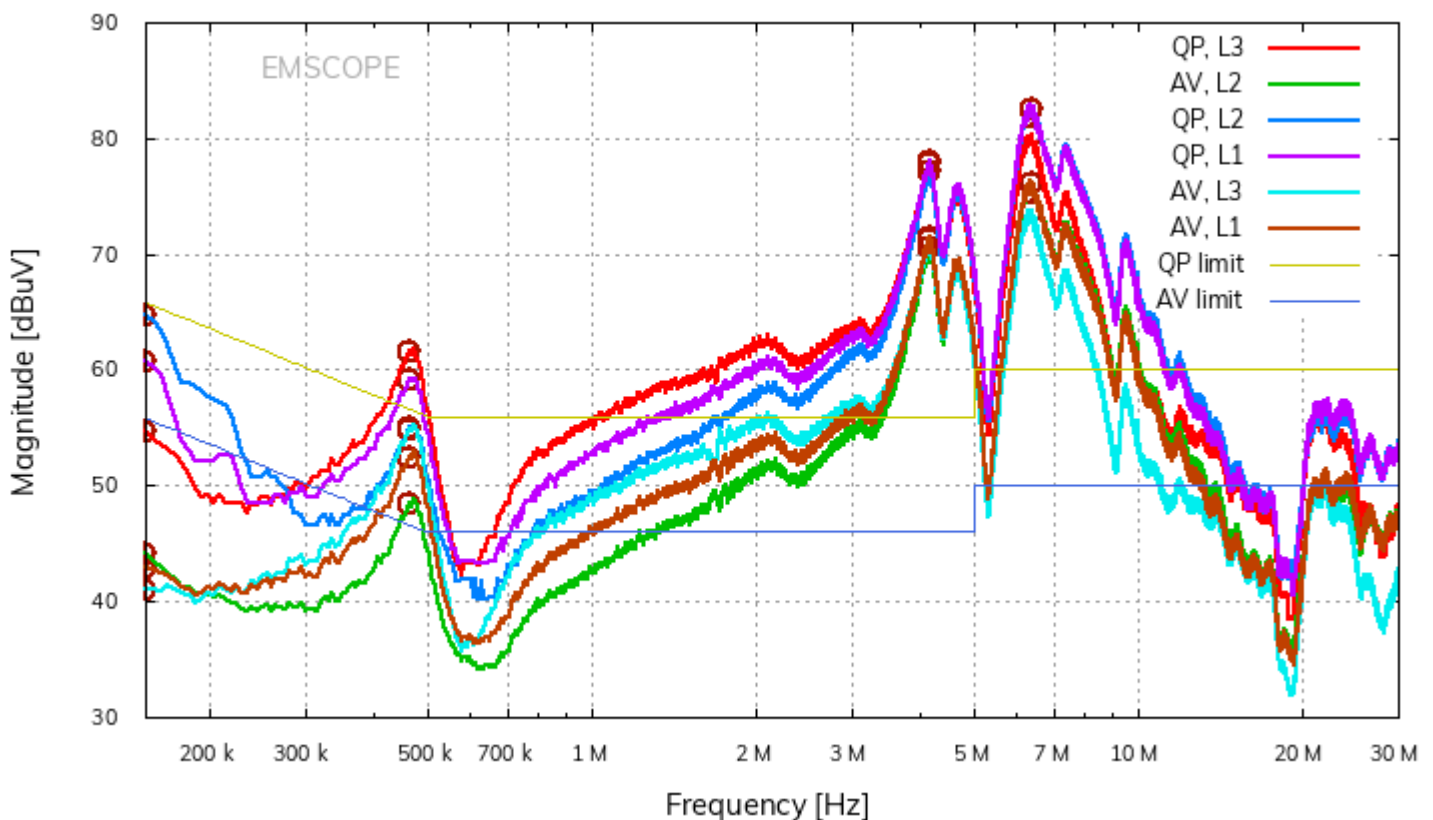

Frequency List Table

Trace	Mkr	Freq [MHz]	Q-Peak [dBuV]	Q-Peak limit [dBuV]	Dist. to Q-P limit [dB]	Avg [dBuV]	Avg limit [dBuV]	Dist. to AV limit [dB]	Chan	Compliance
T6	1	0.1526	54.72	65.86	-11.14				L3	PASS
T6	2	0.4628	61.56	56.64	4.92				L3	FAIL
T6	3	4.1758	77.88	56	21.88				L3	FAIL
T6	4	6.3833	80.39	60	20.39				L3	FAIL
T2	1	0.1526				44.12	55.86	-11.74	L2	PASS
T2	2	0.4628				48.43	46.64	1.79	L2	FAIL
T2	3	4.1758				70.66	46	24.66	L2	FAIL
T2	4	6.3833				76.09	50	26.09	L2	FAIL
T5	1	0.1526	64.79	65.86	-1.06				L2	PASS
T5	2	0.4628	55.12	56.64	-1.52				L2	PASS
T5	3	4.1758	77.2	56	21.2				L2	FAIL
T5	4	6.3833	82.58	60	22.58				L2	FAIL
T4	1	0.1526	60.72	65.86	-5.14				L1	PASS
T4	2	0.4628	59.17	56.64	2.53				L1	FAIL
T4	3	4.1758	77.99	56	21.99				L1	FAIL
T4	4	6.3833	82.6	60	22.6				L1	FAIL
T3	1	0.1526				41.1	55.86	-14.76	L3	PASS
T3	2	0.4628				54.94	46.64	8.29	L3	FAIL
T3	3	4.1758				71.32	46	25.32	L3	FAIL
T3	4	6.3833				73.8	50	23.8	L3	FAIL
T1	1	0.1526				43.02	55.86	-12.84	L1	PASS
T1	2	0.4628				52.54	46.64	5.9	L1	FAIL
T1	3	4.1758				71.43	46	25.43	L1	FAIL
T1	4	6.3833				76.12	50	26.12	L1	FAIL