



Technotrendz
Solutions Pvt. Ltd.

CATALOGUE

RAILWAYS



RAILWAY

**INDUSTRIAL
APPLIANCES**



TELECOM


**SMART RACKS
& CABINETS**



**SMART RACKS
& CABINETS**



DEFENCE SECTOR



www.technotrendz.co.in

Technotrendz
Solutions Pvt. Ltd.

Technotrendz is a consortium of visionary technocrats, dedicated to engineering next-generation switchgear systems and intelligent safety devices. Achieving absolute client delight through the delivery of exceptionally dependable products is our forte. With cutting-edge manufacturing infrastructure and a globally benchmarked test laboratory, we stand at the forefront of innovation. Relentless advancement and inventive excellence define our identity.



Technotrendz
Solutions Pvt. Ltd.

ABOUT US

Technotrendz Solutions Pvt. Ltd., established in 2016, is a fast-emerging force in the electrical and railway equipment manufacturing industry, renowned for its unwavering commitment to innovation, quality, and reliability. With a landmark entry into the Indian Railway sector in 2020, the company rapidly rose to prominence as an RDSO-approved Class-1 bulk supplier for Disconnecting and Earthing Devices, now commanding over 65% market share. Backed by ISO 9001, IRIS 14000, and CE-certified facilities and NABL-tested products as per CPRI standards, Technotrendz stands at the forefront of precision engineering and safety. Proudly aligned with the Make in India initiative as an MSME-registered enterprise, the company's strength lies in its dedicated R&D team, modern infrastructure, and drive for continuous innovation.

Expanding into the future, Technotrendz introduces its visionary electronics brand, **iMONI**, symbolizing a bold leap into advanced monitoring technologies for the smart rack cabinets.

STANDARDS

Since its inception in 2016, Technotrendz has been recognized for delivering highly reliable and safe solutions across diverse sectors, Railways, Solar Energy, Telecom and Defense,. Our products comply with global design and safety standards such as CE, BIS, VDE, DIN, UL, and IEC. Certified under ISO 9001:2015 for Quality Management and ISO 14000 for Environmental Management, we leverage advanced manufacturing equipment, precision testing systems, and cutting-edge technologies to ensure consistent quality and industry compliance.



Technotrendz
Solutions Pvt. Ltd.



ISO 9001 : 2015



IRIS : 2017



ISO 14001 : 2015



RoHS



CE



Technotrendz, established in 2016, is a pioneer in Isolators and Switchgear equipment designed for Indian conditions. Our focused range includes Isolators, Semiconductor HRC Fuses, Cables, Rotary Cam Switches, and Cam Switch Elements. Despite being an MSME, we achieved market leadership in D&ED devices within 3 years through superior quality and excellent service. We are known for prompt delivery, quicker than most competitors, and have earned the industry's best customer feedback for our swift response and dedicated support. Every customer complaint is addressed and resolved, making our products highly trusted and reliable.

INNOVATION

Innovation is in our DNA. Our products are a testament to our focus on quality and reliability. Developing high end products that surpass the expected performance level as per standards is our motto. Our Research and development division continuously identifies and works on development of products that are otherwise not available domestically.



Technotrendz
Solutions Pvt. Ltd.

ORGANISATIONS WE SERVE





Technotrendz
Solutions Pvt. Ltd.

Our Engineered Solutions

An indigenously developed safety solution designed for Indian Railways, enabling reliable electrical isolation and Earthing. Engineered for durability, easy maintenance, and compliance with RDSO standards.



Disconnecting and Earthing Device



A compact and reliable switchgear device used to manually transfer power between two sources. Designed for smooth operation, long life, and safe electrical changeover in industrial applications.

ROTARY SWITCH- 20A

Cam-operated switching elements are typically used as auxiliary switches of contactors and as constituents in camshaft gear, toggle switch assemblies, key switches, and applications with special requirements as to switching capacity.



CAM SWITCH ELEMENT



Technotrendz
Solutions Pvt. Ltd.

A sturdy and heat-resistant mounting unit designed to securely hold and connect fuses in electrical circuits. Ensures safe installation, easy replacement, and reliable circuit protection



FUSE BASE



HRC FUSE

Technotrendz PCB Lighting provides compact, durable, and energy-efficient LED solutions for clear annunciation in control panels and electronic systems. Designed for long life, low power consumption, and reliable performance.



PCB mounted LED (Annunciator)



Technotrendz
Solutions Pvt. Ltd.

iMoni is a compact, AI-enabled smart IP camera designed for seamless integration into smart cabinets. It offers real-time alerts, tamper detection, and intelligent monitoring—ensuring cost-effective, uninterrupted surveillance for critical assets across diverse applications.



iMONI- INTELLIGENT MONITORING



Technotrendz manufactures and supplies high-quality wires used as input materials across various industrial applications, including Railways, Refrigeration, and the Automotive sector.

WIRES

APPLICATIONS



Construction



Renewable



Industrial



Telecoms



Railways

Innovative Development for Quality Products

Works: Plot No. 101(HUDA), Sector-59, HSIIDC Industrial Estate, Faridabad- Haryana- 121004
Mob: +91-8448808000 | E-mail: info@technotrendz.co.in | Website: www.technotrendz.co.in



• Catalogue No.: IS80607TT24C

Features:-

- Ensures safe ON/OFF switching with integrated Earthing feature.
- Built-in auxiliary contacts for secure interlocking control.
- Ample rear space for easy cable entry and adjustment

Design Highlights:-

- Engineered for rail-grade durability
- Optimized for quick cable access

• **Specifications:-**

Parameters	Description
Standard	IEC 13947/IEC947
Type of Voltage & Utilization Category	AC & AC 23
Leakage Current Limit	2mA
Fire Safety Standard	HL-2/HL3 as per EN45545 on device/ on raw material
App. Dimension (W*D*H) in mm	300*416.2*250
Mechanical Operations Count	8500
Electrical Operations Count	1500
Dielectric Strength	1500V rms for 60 sec
Body	Stainless Steel + Powder Coated
MEETs RDSO/RCF Spec No.	RCF EDTS -355 (REV-01) Amd 1 to 6 EDML -231(REV.0)




**Non-AC LHB
Coaches**



Disconnecting and Earthing Device

Dimensional Diagram:-

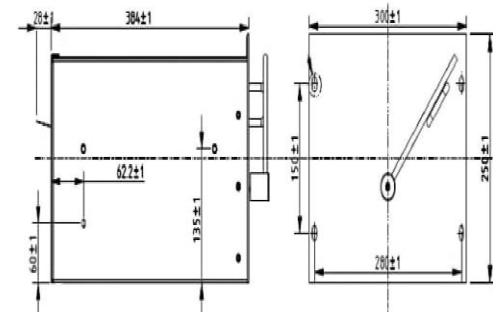

8 Pole 63A 750V

Innovative Development for Quality Products

Works: Plot No. 101(HUDA), Sector-59, HSIIDC Industrial Estate, Faridabad- Haryana- 121004
Mob: +91-8448808000 | E-mail: info@technotrendz.co.in | Website: www.technotrendz.co.in



• Catalogue No.: IS81210TT19L

Features:-

- Dual function for safe connection and Earthing operations.
- Auxiliary contacts ensure reliable interlocking and safety.
- Spacious rear for smooth and flexible cable entry.



**AC LHB
Coaches**

Design Highlights:-

- Compact, rail-ready design built for tough environments. Optimized for quick cable access




Disconnecting and Earthing Device

• **Specifications:-**

Parameters	Description
Standard	IEC 13947/IEC 60947-3
Type of Voltage & Utilization Category	AC&AC 23A
Leakage Current Limit	2mA
Fire Safety Standard	HL-2/HL3 as per EN45545 on device/ on raw material
App. Dimension (W*D*H) in mm	435*480*350
Mechanical Operations Count	7000
Electrical Operations Count	1000
Dielectric Strength	1500V rms for 60 sec
Body	Stainless Steel + Powder Coated
MEETs RDSO/RCF Spec No.	RDSO/PE/SPEC/AC/0184-2015 (Rev.1) RDSO/PE/SPEC/AC/0192-2018 (Rev.1) RDSO/PE/SPEC/AC/0200-2020 (Rev.0)

Dimensional Diagram:-

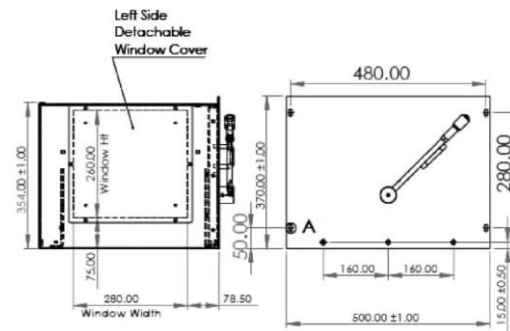

8 Pole 125A 1000V

Innovative Development for Quality Products

Works: Plot No. 101(HUDA), Sector-59, HSIIDC Industrial Estate, Faridabad- Haryana- 121004
Mob: +91-8448808000 | E-mail: info@technotrendz.co.in | Website: www.technotrendz.co.in



A **rotary switch** is a type of electromechanical switch that allows a use to control multiple electrical circuits by rotating a knob or actuator. Unlike a simple on/off switch, a rotary switch can have multiple positions, each connecting to a different circuit or function.

Salient Features:-

- ❖ Delivers reliable switching with quick-make/quick-break action
- ❖ Quick-make/quick-break mechanism ensures arc-free transition
- ❖ Withstands high mechanical and electrical loads over time



ROTARY SWITCH- 20A

Specifications:-

Parameters	Description
Product name	Rotary Switch
Auxiliary Contacts	2 NO + 1 NC
Auxiliary Contacts Ratings	415V/20A
Contacts	Double Break Type (AgCdO)
Number of Positions	2
Operating Mechanism	Closing : Dependent Manual Opening : Depended Manual
Breaking Media	Air brake
Frequency	50 Hz
Standards	IEC: 60947

Innovative Development for Quality Products

Works: Plot No. 101(HUDA), Sector-59, HSIIDC Industrial Estate, Faridabad- Haryana- 121004
Mob: +91-8448808000 | E-mail: info@technotrendz.co.in | Website: www.technotrendz.co.in



Features:-

- Suitable for AC & DC application
- Operated by cams or cam disk
- Easy mounting and replacement
- Suitable for switching low voltages and currents
- Both fixed contact and moving contact are bimetal contact
- Long operating life
- Termination regardless of polarity
- Strong design
- Design as per customers requirements





CAM SWITCH ELEMENT

Specifications:-

Parameters	Description
Product name	CAM SWITCH ELEMENT
Rated Voltage	220V (AC&DC)
Rated Continues Current	20A (AC&DC)
Mechanical Life Cycle	1,50,000
Electrical Life Cycle	30,000
Contact Pressure	160 grams to 260 grams
Breaking Current	1A at 110 VDC
Contact Gap	4.5 mm
Time Constant L/R	15 milli sec.
Di- Electric Strength	1.5 kV RMS for 60 sec.

Dimensional Diagram:-

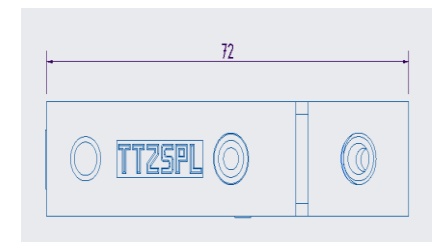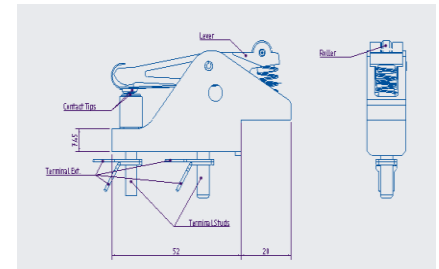

Innovative Development for Quality Products

Channel Partner: Hind Enterprises, Nirman kendra premises co-op society Ltd, Dr E.Moses
Road, Famous Studio lane, Worli Mumbai – 400011, Mob.: +91-9322597396,

E-mail: hindfrontoffice@gmail.com



- Catalogue No.: FB2512TT24K

Features:-

- Low power loss ensures energy efficiency
- Enables cooler operation of equipment
- Enhances equipment lifespan
- Low cut-off current minimizes electromagnetic stress
- Reduces risk of circuit and equipment damage
- Low I²t limits thermal stress
- Minimizes fire hazards
- Protects sensitive components from overload
- Ideal for backup protection applications
- Supports long-term system reliability



FUSE BASE

Specifications:-

Parameters	Description
Product name	250 A Fuse Base
Amperage Rating	100-250 A
Breaking Capacity	120 KA
Frequency	50Hz
Voltage Type	AC
Rated Voltage AC	1200
Breaking Current	1A at 110 VDC
Contact Gap	4.5 mm
Time Constant L/R	15 milli sec.
Di- Electric Strength	1.5 kV RMS for 60 sec.

Innovative Development for Quality Products

Works: Plot No. 101(HUDA), Sector-59, HSIIDC Industrial Estate, Faridabad- Haryana- 121004
Mob: +91-8448808000 | E-mail: info@technotrendz.co.in | Website: www.technotrendz.co.in



Catalogue No.: FU1210TT24K

Features:-

- Interrupt rating up to 120kA
- Corrosion-resistant contacts
- Low power loss & temperature rise
- Gripping lugs: metal/live for standard application, metal/insulated for improved safety

Design Highlights:-

- Premium ceramic body
- Precision spot-welded fuse elements

Specifications:-

Parameters	Description
Product name	High Voltage Fuse
Amperage Rating	125 A
Breaking Capacity	120 KA
Utilization Category	GB
Voltage Type	AC
Rated Voltage AC	1000 V
Current Type	AC
Class	Class GB
Fuse Shape	Square Body, Knife blade Contacts
Standards	IEC 60269-1&2 VDE 0636 Part 2011



FUSE




Innovative Development for Quality Products

Works: Plot No. 101(HUDA), Sector-59, HSIIDC Industrial Estate, Faridabad- Haryana- 121004
Mob: +91-8448808000 | E-mail: info@technotrendz.co.in | Website: www.technotrendz.co.in



PRODUCT OVERVIEW :-

Technotrendz Solutions Pvt Ltd presents high-performance PCB mounted LED lights emerged for annunciation purposes in industrial and infrastructural environments. Designed for durability, energy efficiency, and clear visual signalling, these LED modules are ideal for control panels, smart cabinets, and monitoring systems.

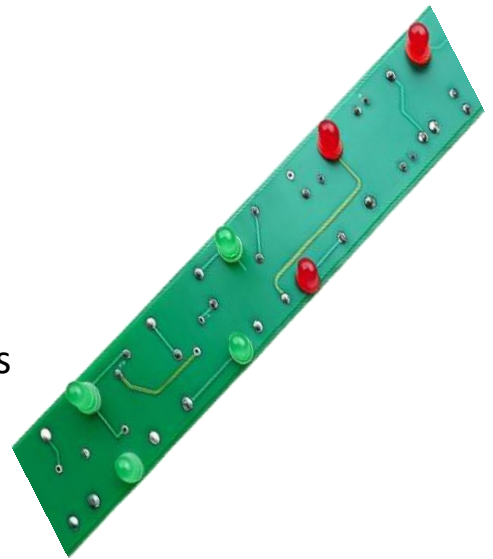

PCB mounted LED (Annunciator)

Specifications:-

Parameters	Description
Type of LED	PCB mounted LED (Annunciator)
Dimension of LED	10mm (Dia)
LED Life	>50,000 Burning Hours
LED Color	Green and Red
Input Operating Voltage	105-210 V DC
Power Dissipation	36 W
PCB Dimension	410mm*50mm
PCB Thickness	1.6mm
PCB Material	FR-4
Number of red/green LED	5/10

COMMON APPLICATIONS

- Annunciation panels and control boards
- Smart cabinets and telecom enclosures
- Automotive lighting systems
- Industrial indicators and alarms

Innovative Development for Quality Products

Works: Plot No. 101(HUDA), Sector-59, HSIIDC Industrial Estate, Faridabad- Haryana- 121004
Mob: +91-8448808000 | E-mail: info@technotrendz.co.in | Website: www.technotrendz.co.in



Features:-

- AI-Powered Monitoring Real-time surveillance with edge computing and intelligent threat detection.
- Compact Cabinet Integration Fits standard enclosures, enabling seamless and secure installation.



iMONI- INTELLIGENT MONITORING

Specifications:-

Parameters	Description
Integrated IP Camera	Digital/Analog IO
JPEG image	H.264 Video Recording
Remote Access Control	Tamper proof
Multiple Connectivity	Audio/Visual Alarms
Easy Installation	USB Port (RS232)
Wide Power Range	5-12VDC
Micro-SD Card	Industry standards
TCP/IP NTP	DHCP AP
WiFi Bluetooth	Cellular backend
Ethernet	Access Control

Environmental Data

Operating Temperature -10°C to +60°C
Storage Temperature -20°C to +70°C
Relative Humidity 95 % (+55°C) MTBF
> 50,000 hours

Dimensions

Height: 28.2 mm
Width: 50.5 mm
Length: 105 mm
Weight: 200 gm


Innovative Development for Quality Products

Works: Plot No. 101(HUDA), Sector-59, HSIIDC Industrial Estate, Faridabad- Haryana- 121004
Mob: +91-8448808000 | E-mail: info@technotrendz.co.in | Website: www.technotrendz.co.in



Features :-

- Irradiation Cross-Linking: Enhances thermal, mechanical, and chemical resistance.
- Global Standards Compliance: Meets IEC, RDSO, ISO 6722 & ISO 19642 requirements.
- Dual Coated Enameled Finish: Ensures superior insulation and durability.

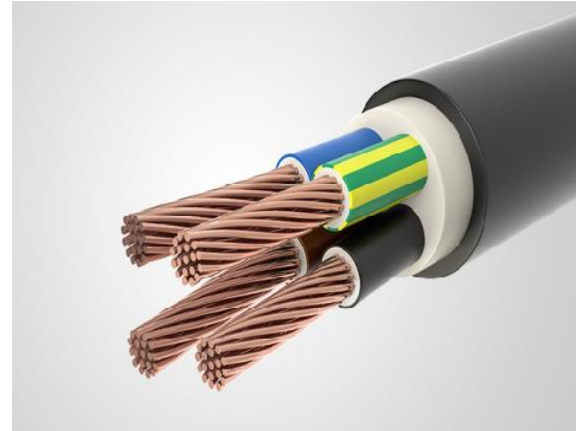

Specifications :-

Parameters	Description
Voltage Rating	300V, 750V
Temperature Range	-40 C to +125 C
Mechanical Properties	High Flexibility, Vibration Resistance
Conductor Type	Tinned/ Bare Copper, Drawn Wires
Cross Linking Method	Electron Beam (E-Beam) Irradiation
Flame Retardance	Compliant with Flame Retardant low Smoke (FRLS) properties
Insulation Type	Irradiated XLPE, Dual Coated Enamel, PVC,
Standards	IEC Standards, RDSO (Railway), ISO 6722, ISO 19642 (Automotive)

WIRES

APPLICATIONS :-

- Refrigeration Compressors – Used in domestic & industrial cooling systems.
- Railway Coaches & Locomotives – For power, control, and signal wiring.
- Electric & Hybrid Vehicles – In high-performance automotive harnessing and battery systems.

Innovative Development for Quality Products

Works: Plot No. 101(HUDA), Sector-59, HSIIDC Industrial Estate, Faridabad- Haryana- 121004
Mob: +91-8448808000 | E-mail: info@technotrendz.co.in | Website: www.technotrendz.co.in



Technotrendz
Solutions Pvt. Ltd.

TECHNOTRENDZ AT THE GLANCE



Innovative Development for Quality Products

Works: Plot No. 101(HUDA), Sector-59, HSIIDC Industrial Estate, Faridabad- Haryana- 121004
Mob: +91-8448808000 | E-mail: info@technotrendz.co.in | Website: www.technotrendz.co.in



Technotrendz
Solutions Pvt. Ltd.



R & D SECTION



Quality & Inspection

Innovative Development for Quality Products

Works: Plot No. 101(HUDA), Sector-59, HSIIDC Industrial Estate, Faridabad- Haryana- 121004
Mob: +91-8448808000 | E-mail: info@technotrendz.co.in | Website: www.technotrendz.co.in



Technotrendz
Solutions Pvt. Ltd.



PRESS MACHINE




Assembly Line

Innovative Development for Quality Products

Works: Plot No. 101(HUDA), Sector-59, HSIIDC Industrial Estate, Faridabad- Haryana- 121004
Mob: +91-8448808000 | E-mail: info@technotrendz.co.in | Website: www.technotrendz.co.in



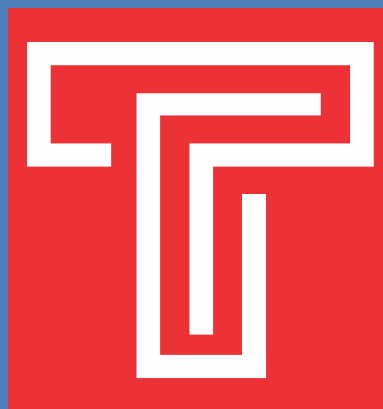

Technotrendz

Solutions Pvt. Ltd.

Corporate Address:
1111, 11th floor, Unitech Arcadia,
South City -II, Gurgaon 122018

Works:- Plot No. 101
(HUDA) Sector 59
HSIIDC industrial Estate
Faridabad -121004
Haryana (INDIA)



Contact :
Call : +91- 8448808000
E-mail : info@technotrendz.co.in

www.technotrendz.co.in