



STATUT DESSIN / DWG STATUS			HISTORIQUE DE REVISION / REVISION HISTORY	CHANGE NOTICE	DESS. / DR	APPR
DATE	REV	SHEET-ZONE				
2015-07-31	A1		RELACHE SOUMISSION / QUOTATION RELEASE		LJ	
2015-08-27	B1		RELACHE INITIALE / INITIAL RELEASE		LJ	GM
2016-01-07	C1	1-F9, 1-F10, 1-F11, 1-F12, 2-E10	DIMENSIONS REMOVED	00403	MV	GM
	C2	1-C2, 1-C3	DETAIL VIEWS M AND N ADDED			
	C3	1-G10	DIMENSION WAS 24.32			
	C4	1-E9	SNI MARKING ADDED			
	C5	1-B13	NOTE 13 ADDED			
2016-12-02	D1	1-E9, 1-E10, 1-E11, 1-E12	MKC REMOVED	00558	MV	SF
	D2	1-B14, 2-C9, 2-H2	MKC ADDED			
2019-12-03	E1	1-B10	SPLINE TABLE TOLERANCE WAS Bk	CR-1347	MV	SF
2022-02-02	F1	1-I2	MINOR DIA DEPTH ADDED	100861	SSS	MV
	F2	2-J14	DIMENSION WAS 95			
	F3	2-H3	WAS 3 F9 $^{+0.031}_{+0.006}$			
	F4	2-C13	WAS ⌖ Ø0.05Ⓜ E A-B			
	F5	2-C8	WAS Ø20 $^{-0.03}_{-0.04}$			
2024-09-11	G1	1-D10, 1-D9, 1-F9	REMOVED DIMENSION, 4 PLACES REMOVED GD&T, 2 PLACES	149141	ANL	MV
	G2	1-B1	REMOVED DETAIL N			
	G3	1-C8	WAS 15°			
	G4	1-G6	WAS 259.68			
	G5	1-D2	WAS Ø76			
	G6	1-D10	DIMENSION WAS Ø100 $^{+0.025}_{+0.009}$			

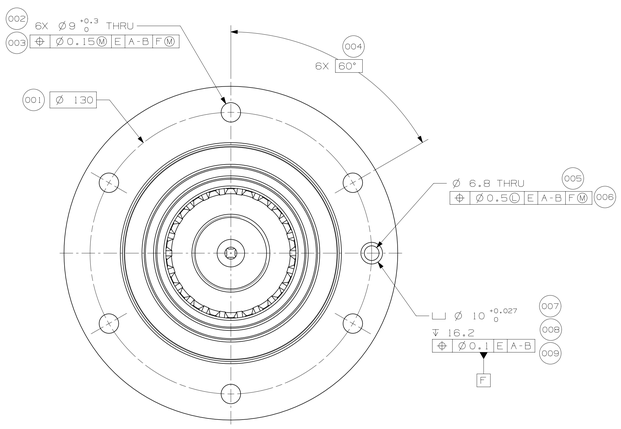

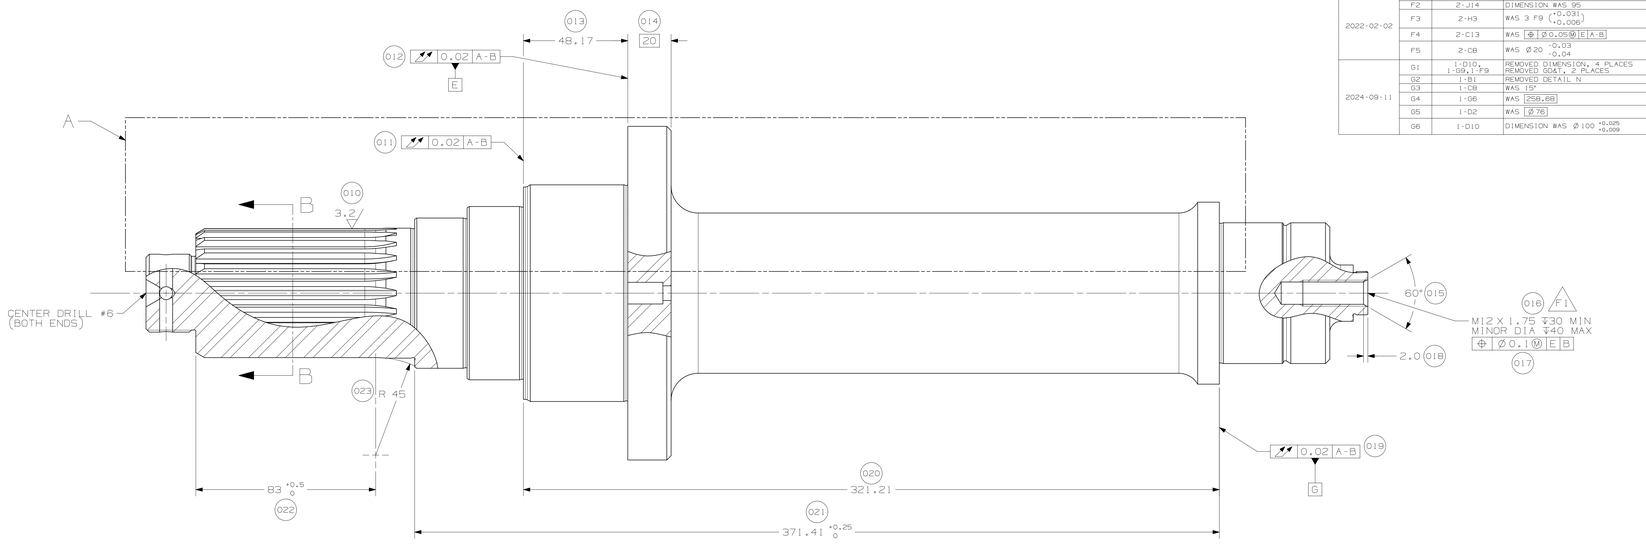


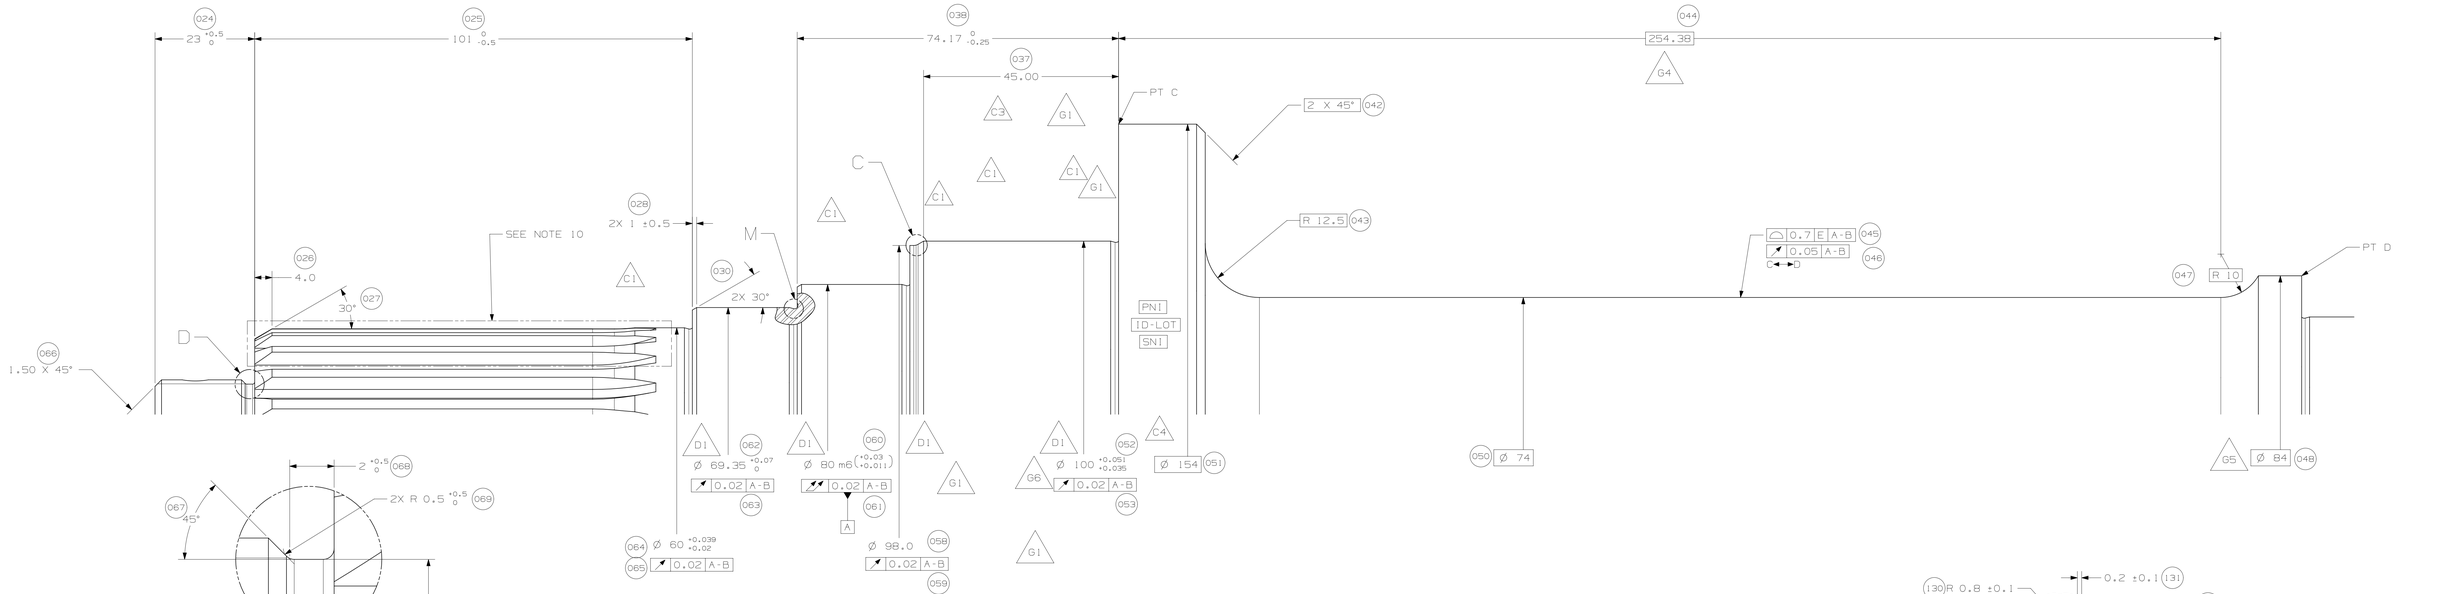




DETAIL D
SCALE 10:1


DETAIL A
SCALE 2:1



DETAIL M
SCALE 10:1
5 PLACES



DETAIL C
SCALE 10:1

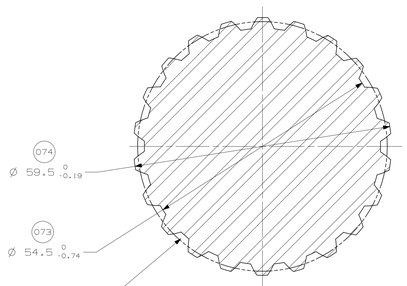

SECTION B-B
SCALE 2:1

13- SNI : UNIQUE SERIAL NUMBER MUST BE MARKED WHERE SHOWN, USING METHOD B3, B4, B5, B6 OR C1 AS PER IN-6024 (135 C5)
12- ALTERNATE SPLINE END RADIUS OF 30mm IS ACCEPTABLE
11- PART MUST BE MADE FROM GB/T 3077-1999 42CrMo (AISI 4140) (049) (040)
10- MKC : INDUCTION QUENCHING FOR SPLINE TEETH ZONE, QUENCH-HARDENED DEPTH 2.5 TO 5mm, SURFACES HARDNESS HRC50 TO 59 AFTER FINAL TEETH MACHINING. (039) D2
9- HEAT TREATEMENT HRC 28-32 BEFORE FINAL MACHINING (083)
8- INVOLUTE PROFILE TOLERANCE SHOULD NOT EXCEED 0.025, TOTAL HELIX DEVIATION SHOULD NOT EXCEED 0.039 (082)
7- MKC : MAJOR KEY CHARACTERISTIC, REFER TO SQ-6013-002 (081)
6- THIS PART IS CONSIDERED CRITICAL AS PER IN-6035 (080)
5- THREAD METRIC, M PROFILE, CLASS 6H OR 6g, RIGHT HAND, UOS (079)
4- PERFORM VISUAL INSPECTION AND CLEANLINESS OF PRODUCT AS PER SQ-8005 (078)
3- BREAK ALL SHARP EDGES 0.1-0.5 UOS (077)
2- ID-LOT : TM4 SUPPLIER ID AND LOT NUMBER MUST BE MARKED WHERE SHOWN, USING METHOD A4, AS PER IN-6024 (076)
1- PNI : PART NUMBER AND REVISION MUST BE MARKED WHERE SHOWN, USING METHOD A4, AS PER IN-6024 (075)

NOTES GENERALES / GENERAL NOTES

(034) TABLE I (DIMENSIONS ARE IN mm) E1

SHAFT DIN5480 - W60x2.50x22x9e		
NUMBER OF TEETH	z	22
MODULE	m	2.50
PRESSURE ANGLE	α	30°
TIP CIRCLE DIAMETER	d_{a1}	59.50
ROOT FORM CIRCLE DIAMETER	d_{f1v}	54.92
ROOT CIRCLE DIAMETER	d_{f1}	54.50
MAX EFFECTIVE TOOTH THICKNESS	s_{vmax}	5.189
ACTUAL MAXIMUM REFERENCE TOOTH THICKNESS	s_{max}	5.159
ACTUAL MINIMUM TOOTH THICKNESS	s_{min}	5.109
INSPECTION		
MEASURING CIRCLE DIAMETER	D_M	5.50
MAX REF. DIMENSION OVER MEASURING CIRCLES	M_{1max} Ref.	66.114
MIN DIMENSION OVER MEASURING CIRCLES	M_{1min}	66.044


MATERIEL / MATERIAL SPECIFICATIONS: SEE NOTE 11		MASSE / MASS: 20 kg
BASE SUR / BASED ON: 3315-0159	DESSINE / DRAWN: L JIOFACK	DATE: 2015-07-31
SAUF INDICATIONS CONTRAIRES / UNLESS OTHERWISE SPECIFIED: CONFORME A NORME Y14.5M-2009. TOUTES LES DIMENSIONS SONT EN MILLIMETRES [POUCES]. NE PAS MESURER SUR LE DESSIN. EN ACCORDANCE WITH NORME Y14.5M-2009. ALL DIMENSIONS ARE IN MILLIMETERS [INCHES]. DO NOT SCALE ON DRAWING.	VERIFIE / CHECKED: G MARCEAU, ing.	DATE: 2015-07-31
	ING. / ENG. APPROBATION: G MARCEAU, ing.	DATE: 2015-08-27
	ANALYSES / ANALYSIS	DATE
	ELECTRIQUE / ELECTRICAL	DATE

TOLERANCES : X ± 1; X.X ± 0.5; X.XX ± 0.25; X.XXX ± 0.125; ANGLE ± 0.5°
FINI / FINISH : SURFACES √3.2; TROUS (MOINS DE 51 mm) √6.3; HOLES (LESS THAN 51 mm)


tm4 Electrodynamic Systems, Member of Hydro-Québec group	TITRE / TITLE: SHAFT, ROTOR	FORMAT / SIZE: A0	ECHELLE / SCALE: 1:1
	NO. DESSIN / DWG NUMBER: 3315-0249	REVISION: G	FEUILLE / SHEET: 1/2


©2015, TM4 Inc.
Tous droits réservés
All rights reserved


TM-0004/C

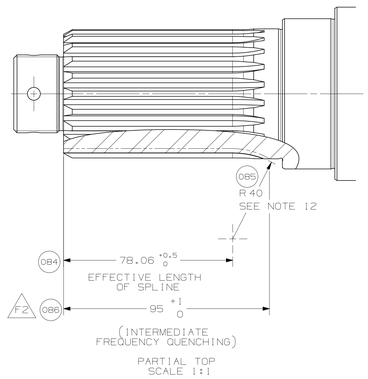


PARTIAL TOP
SCALE 1:1

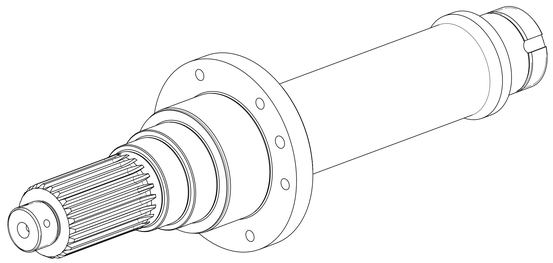


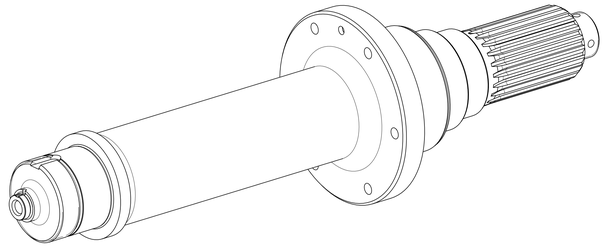

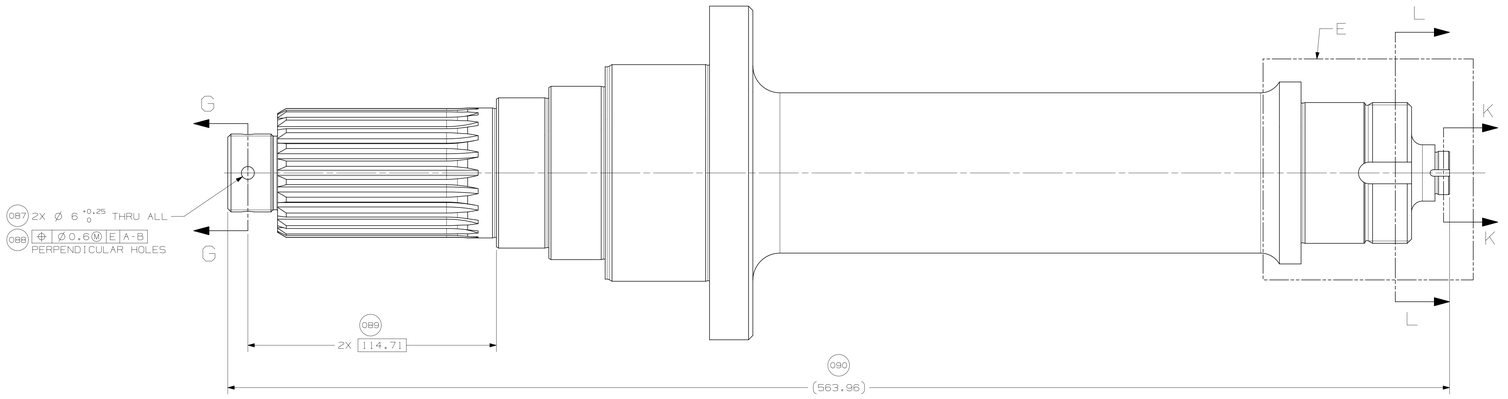





SECTION L - L
SCALE 1:1

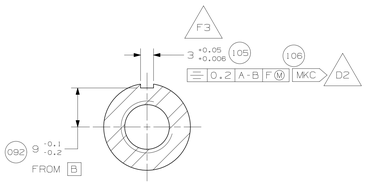


SECTION K - K
SCALE 2:1




SECTION G - G
SCALE 2:1

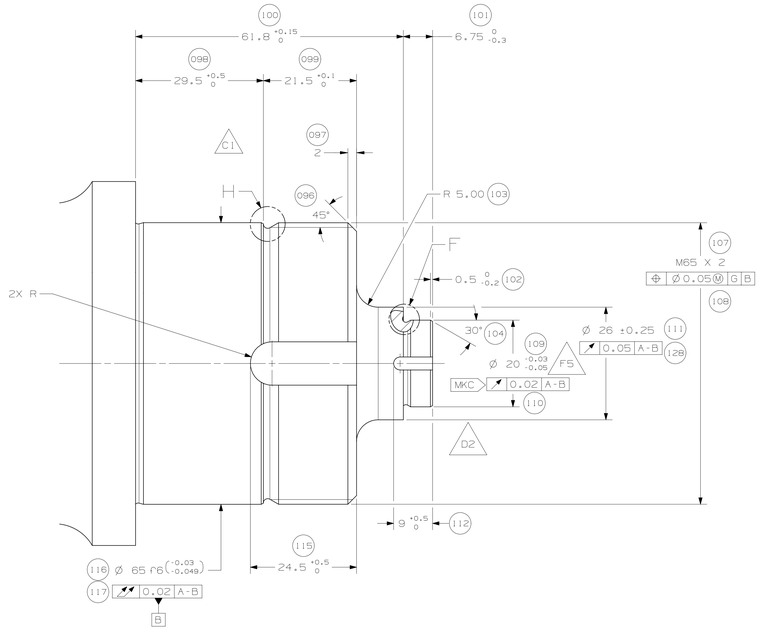

DETAIL E
SCALE 2:1

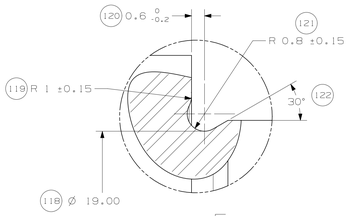

DETAIL F
SCALE 10:1



DETAIL H
SCALE 10:1

MATERIEL / MATERIAL SPECIFICATIONS SEE NOTE 11		MASSE / MASS 20 kg
BASE SUR / BASED ON 3315-0159	DESSINÉ / DRAWN L JIOFACK	DATE 2015-07-31
SAUF INDICATIONS CONTRAIRES / UNLESS OTHERWISE SPECIFIED CONFORME À ASME Y14.5M-2009. TOUTES LES DIMENSIONS SONT EN MILLIMÈTRES [POUCES]. NE PAS MESURER SUR LE DESSIN. IN ACCORDANCE WITH ASME Y14.5M-2009. ALL DIMENSIONS ARE IN MILLIMETERS [INCHES]. DO NOT SCALE ON DRAWING. TOLERANCES : X ± 1 X.X ± 0.5 X.XX ± 0.25 X.XXX ± 0.125 ANGLE ± 0.5° FINI / FINISH : SURFACES √3.2 TROUS (MOINS DE 51 mm) HOLES (LESS THAN 51 mm) √6.3	VERIFIÉ / CHECKED G MARCEAU, ing.	DATE 2015-07-31
	ING. / ENG. APPROBATION G MARCEAU, ing.	DATE 2015-08-27
	ANALYSES / ANALYSIS	DATE
	ELECTRIQUE / ELECTRICAL	DATE
tm4 Electrodynamic Systems Member of Hydro-Québec group	TITRE / TITLE SHAFT, ROTOR	FORMAT / SIZE A0
	NO. DESSIN / DWG NUMBER 3315-0249	REVISION G
		ÉCHELLE / SCALE 1:1
		FEUILLE / SHEET 2/2

©2015 TM4 Inc.
Tous droits réservés
All rights reserved

TM-0004/C