
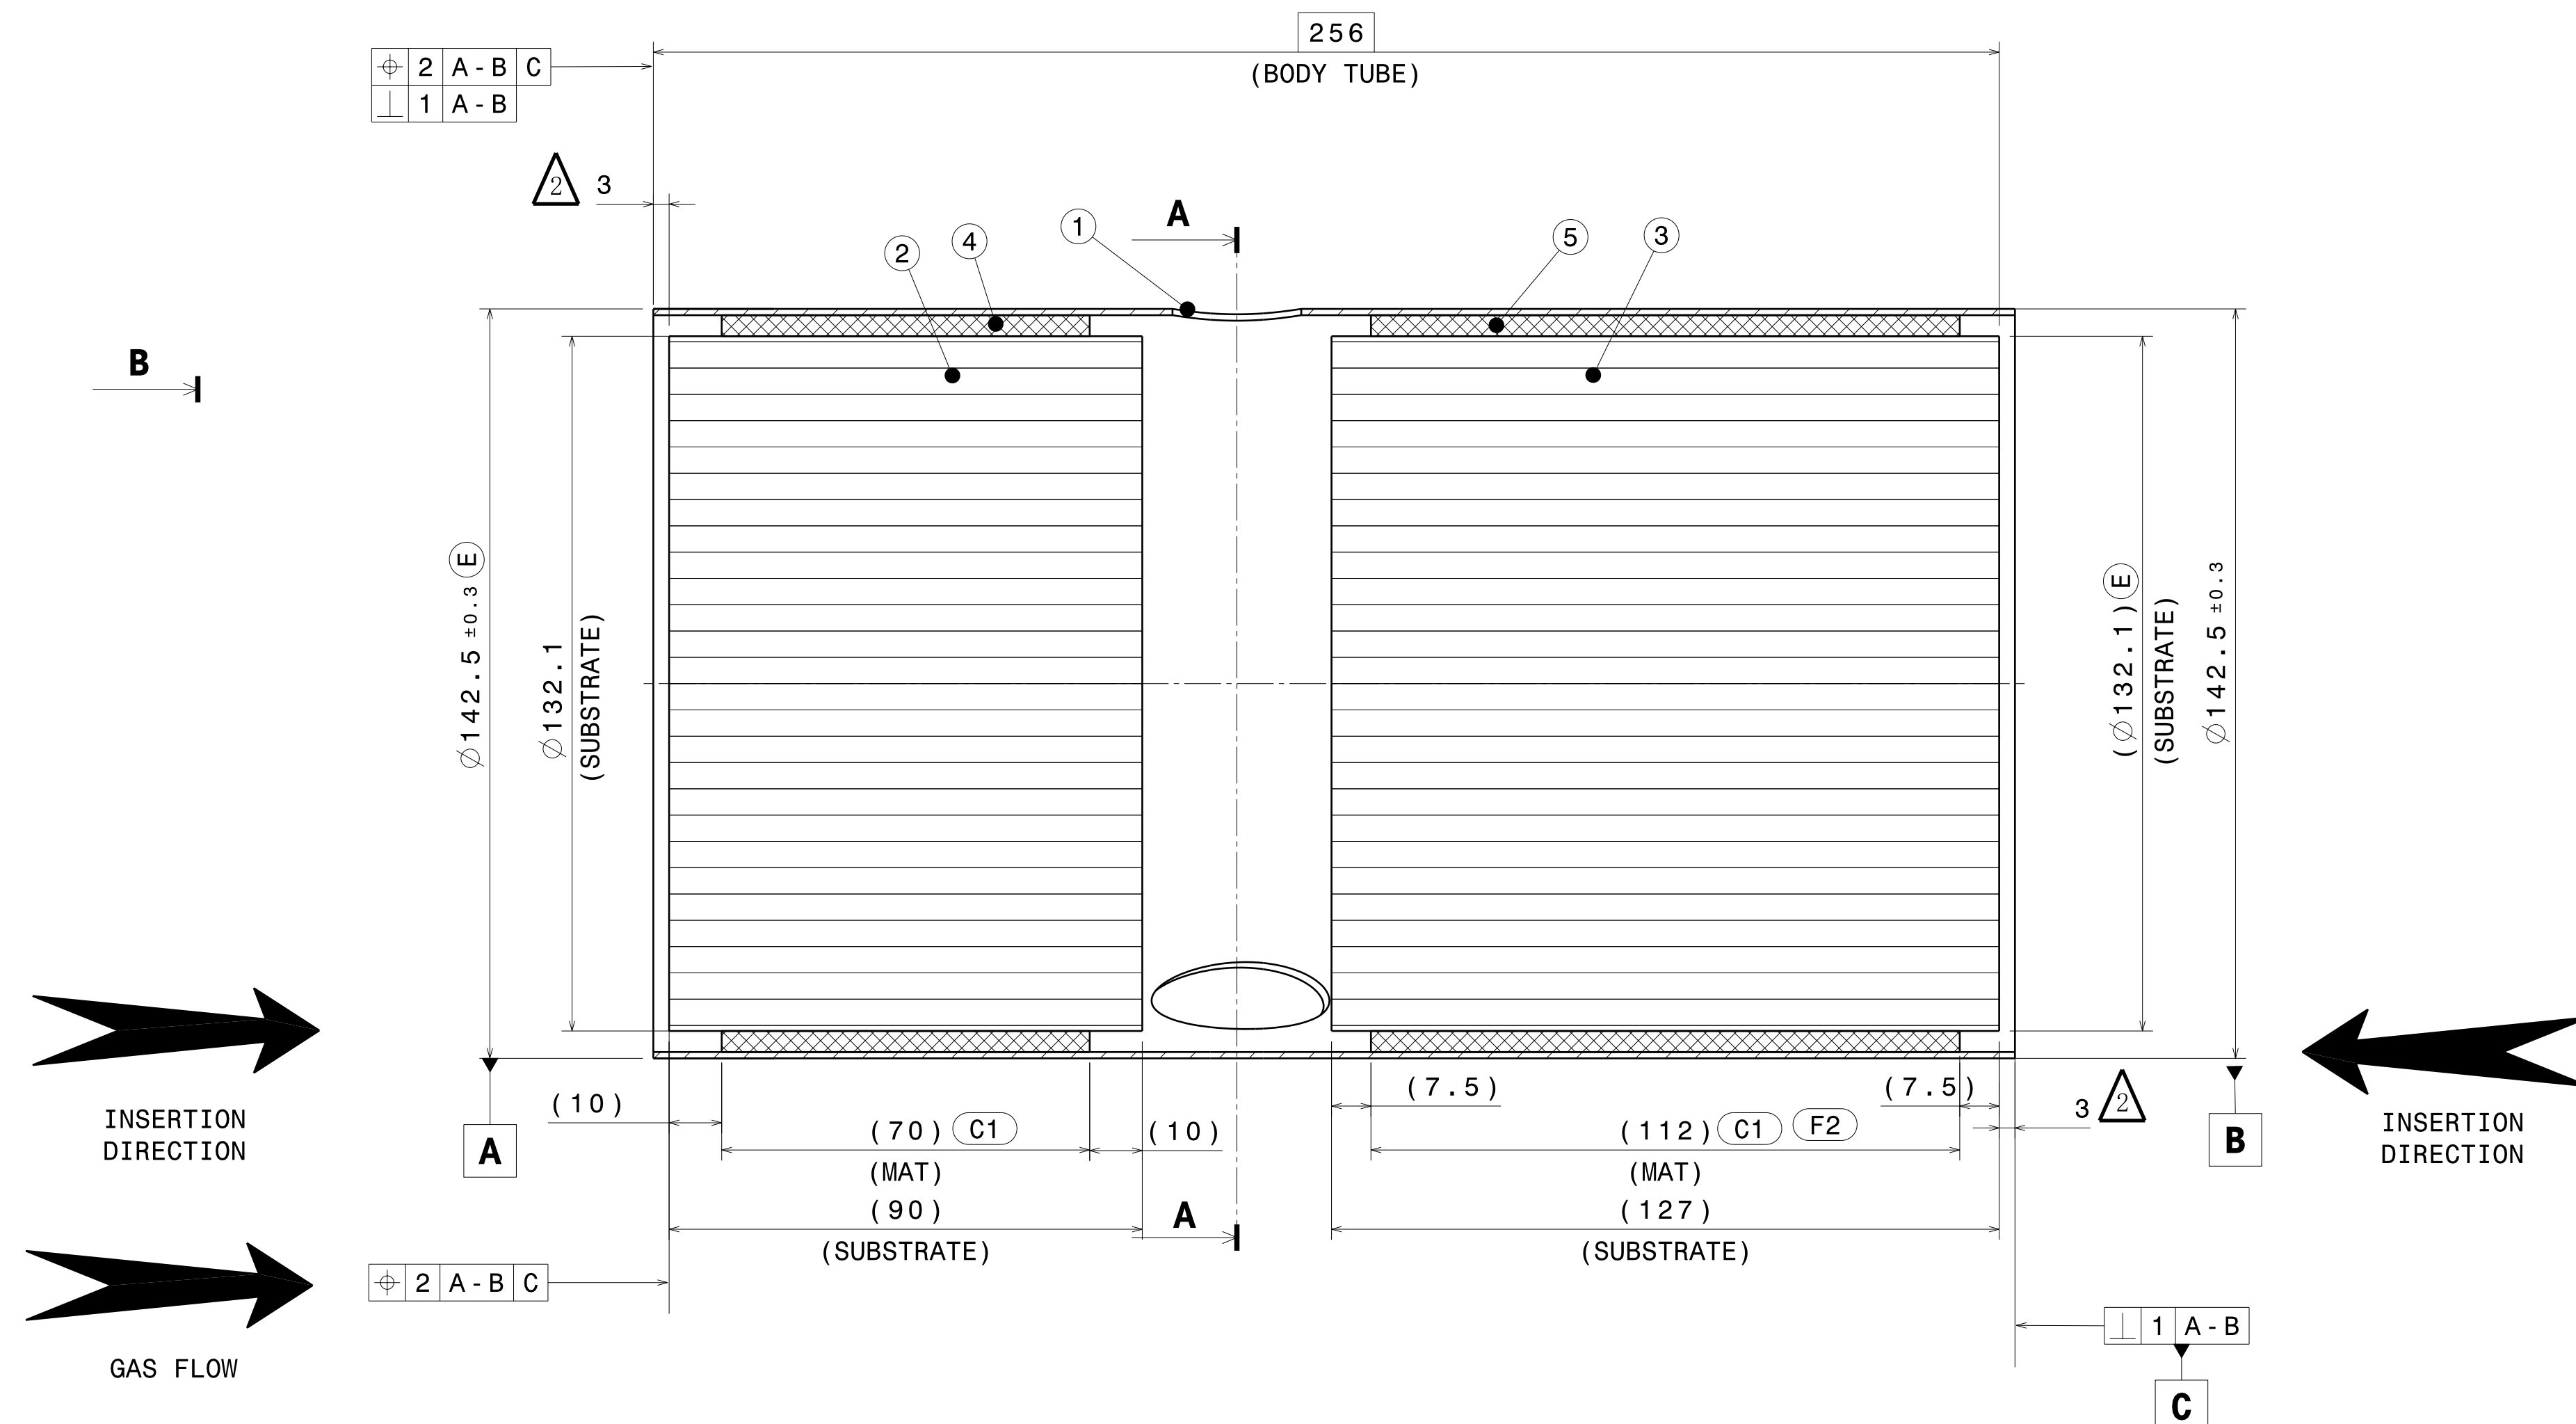
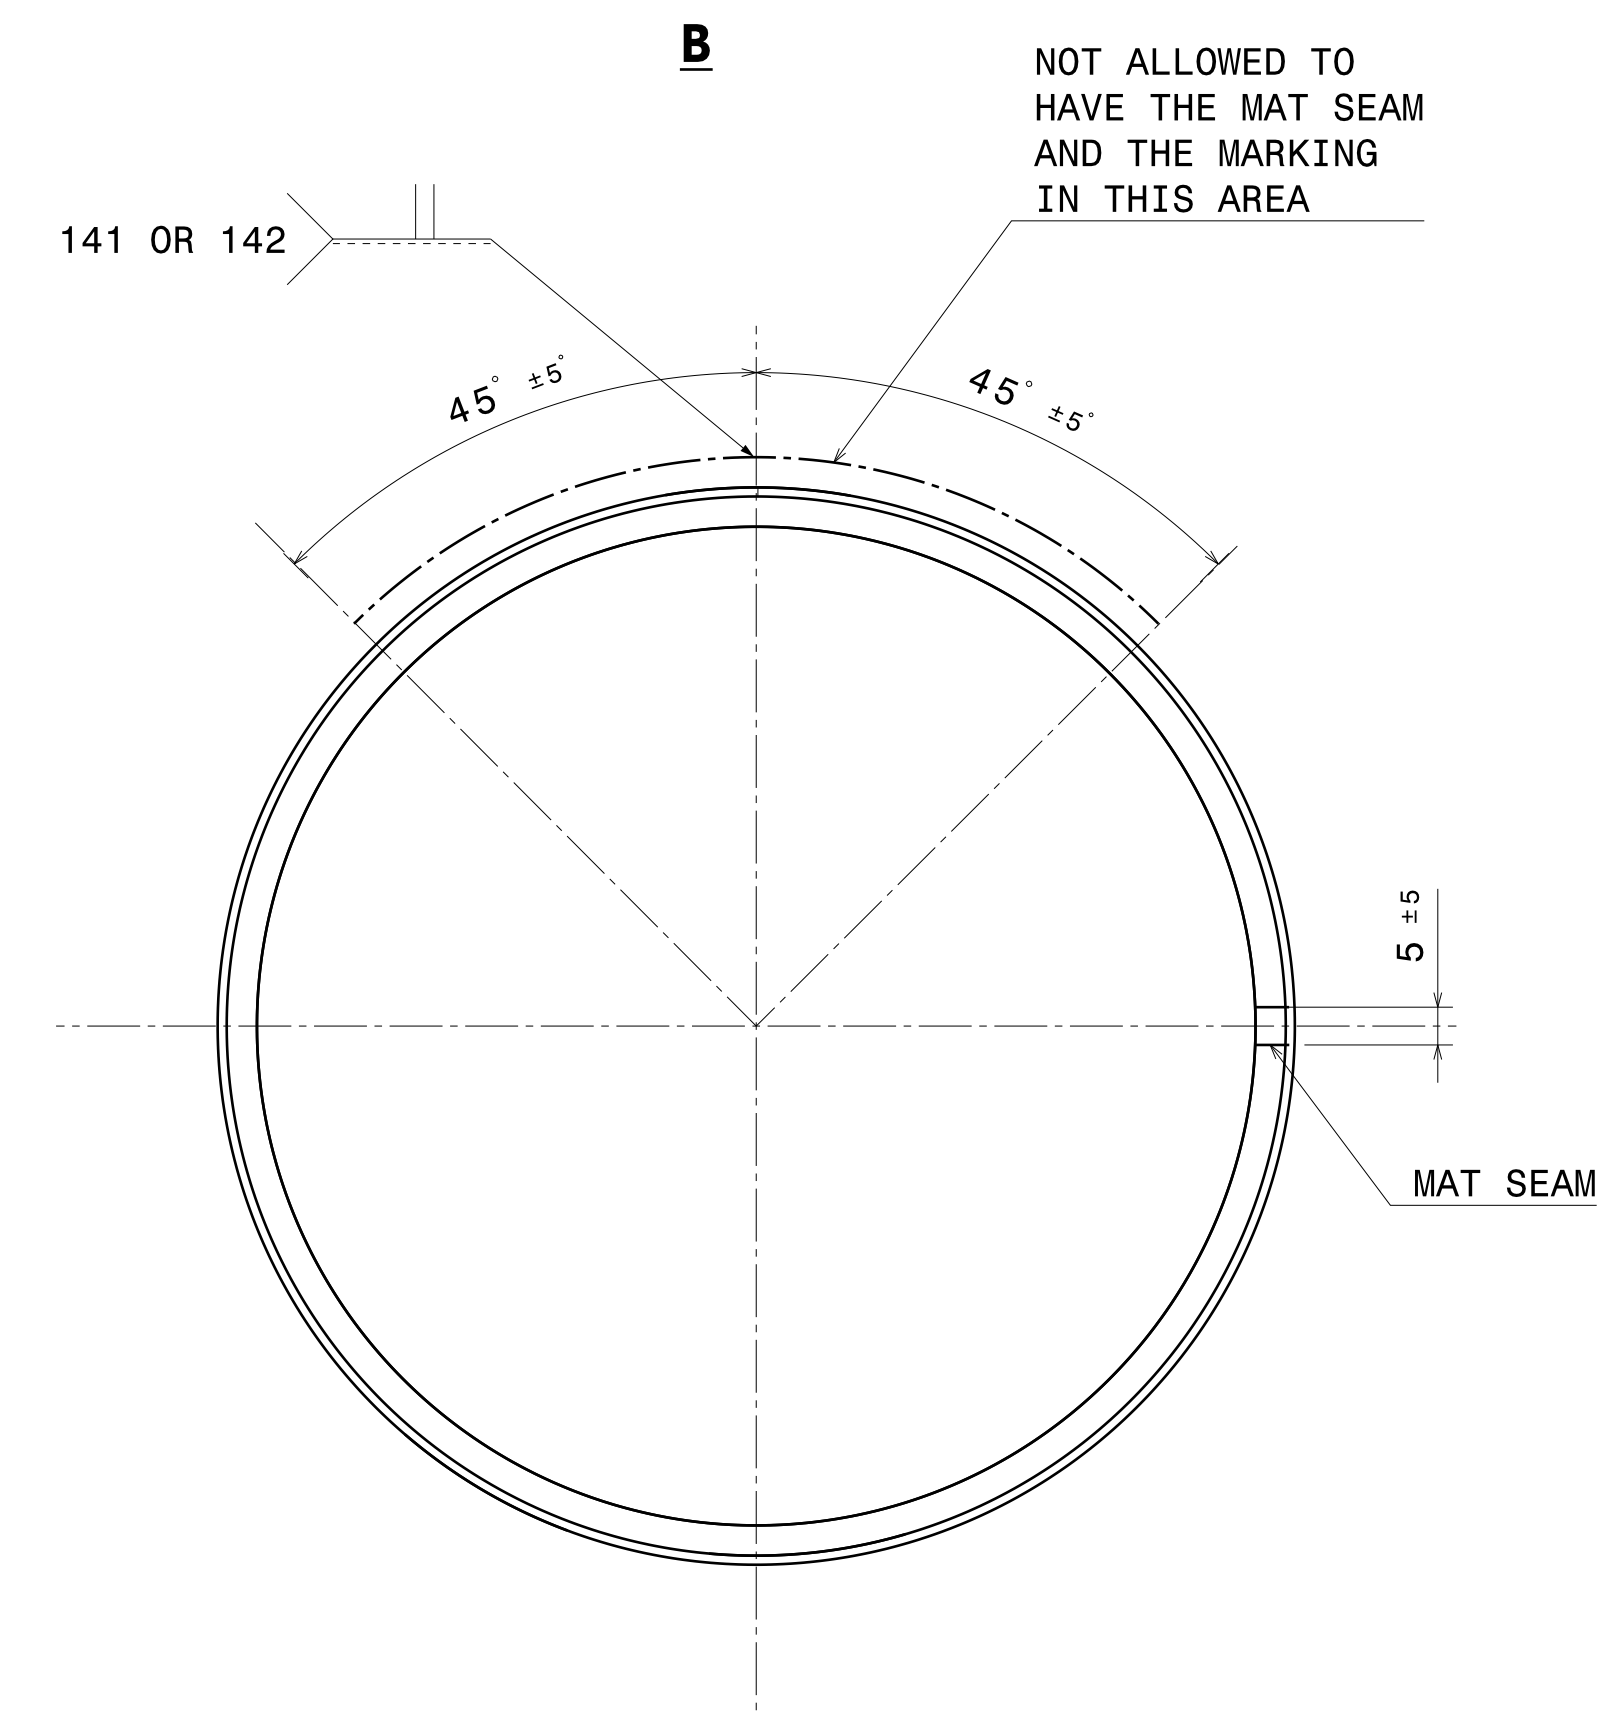


NO	QTY	PART NUMBER	DESCRIPTION	CUSTOMER PN	MATERIAL	OBSERVATION	SPEC	MASS
1	1	4904154	COVER	-	441	THK:1.2mm	ASTM A240	1.051
2	1	4904155	SUBSTRATE CERAMIC TWC	1205100XKN08A	CORDIERITE	Ø132.1x90	-	0.708
3	1	4904157	SUBSTRATE CERAMIC GPF	1205101XKN08A	CORDIERITE	Ø132.1x127	-	0.729
4	1	4904156	MAT SUPPORT TWC	-	-	GAP 4mm	-	0.063
5	1	4904158	MAT SUPPORT GPF	-	-	GAP 4mm	-	0.101


C2

C2

D1 F4

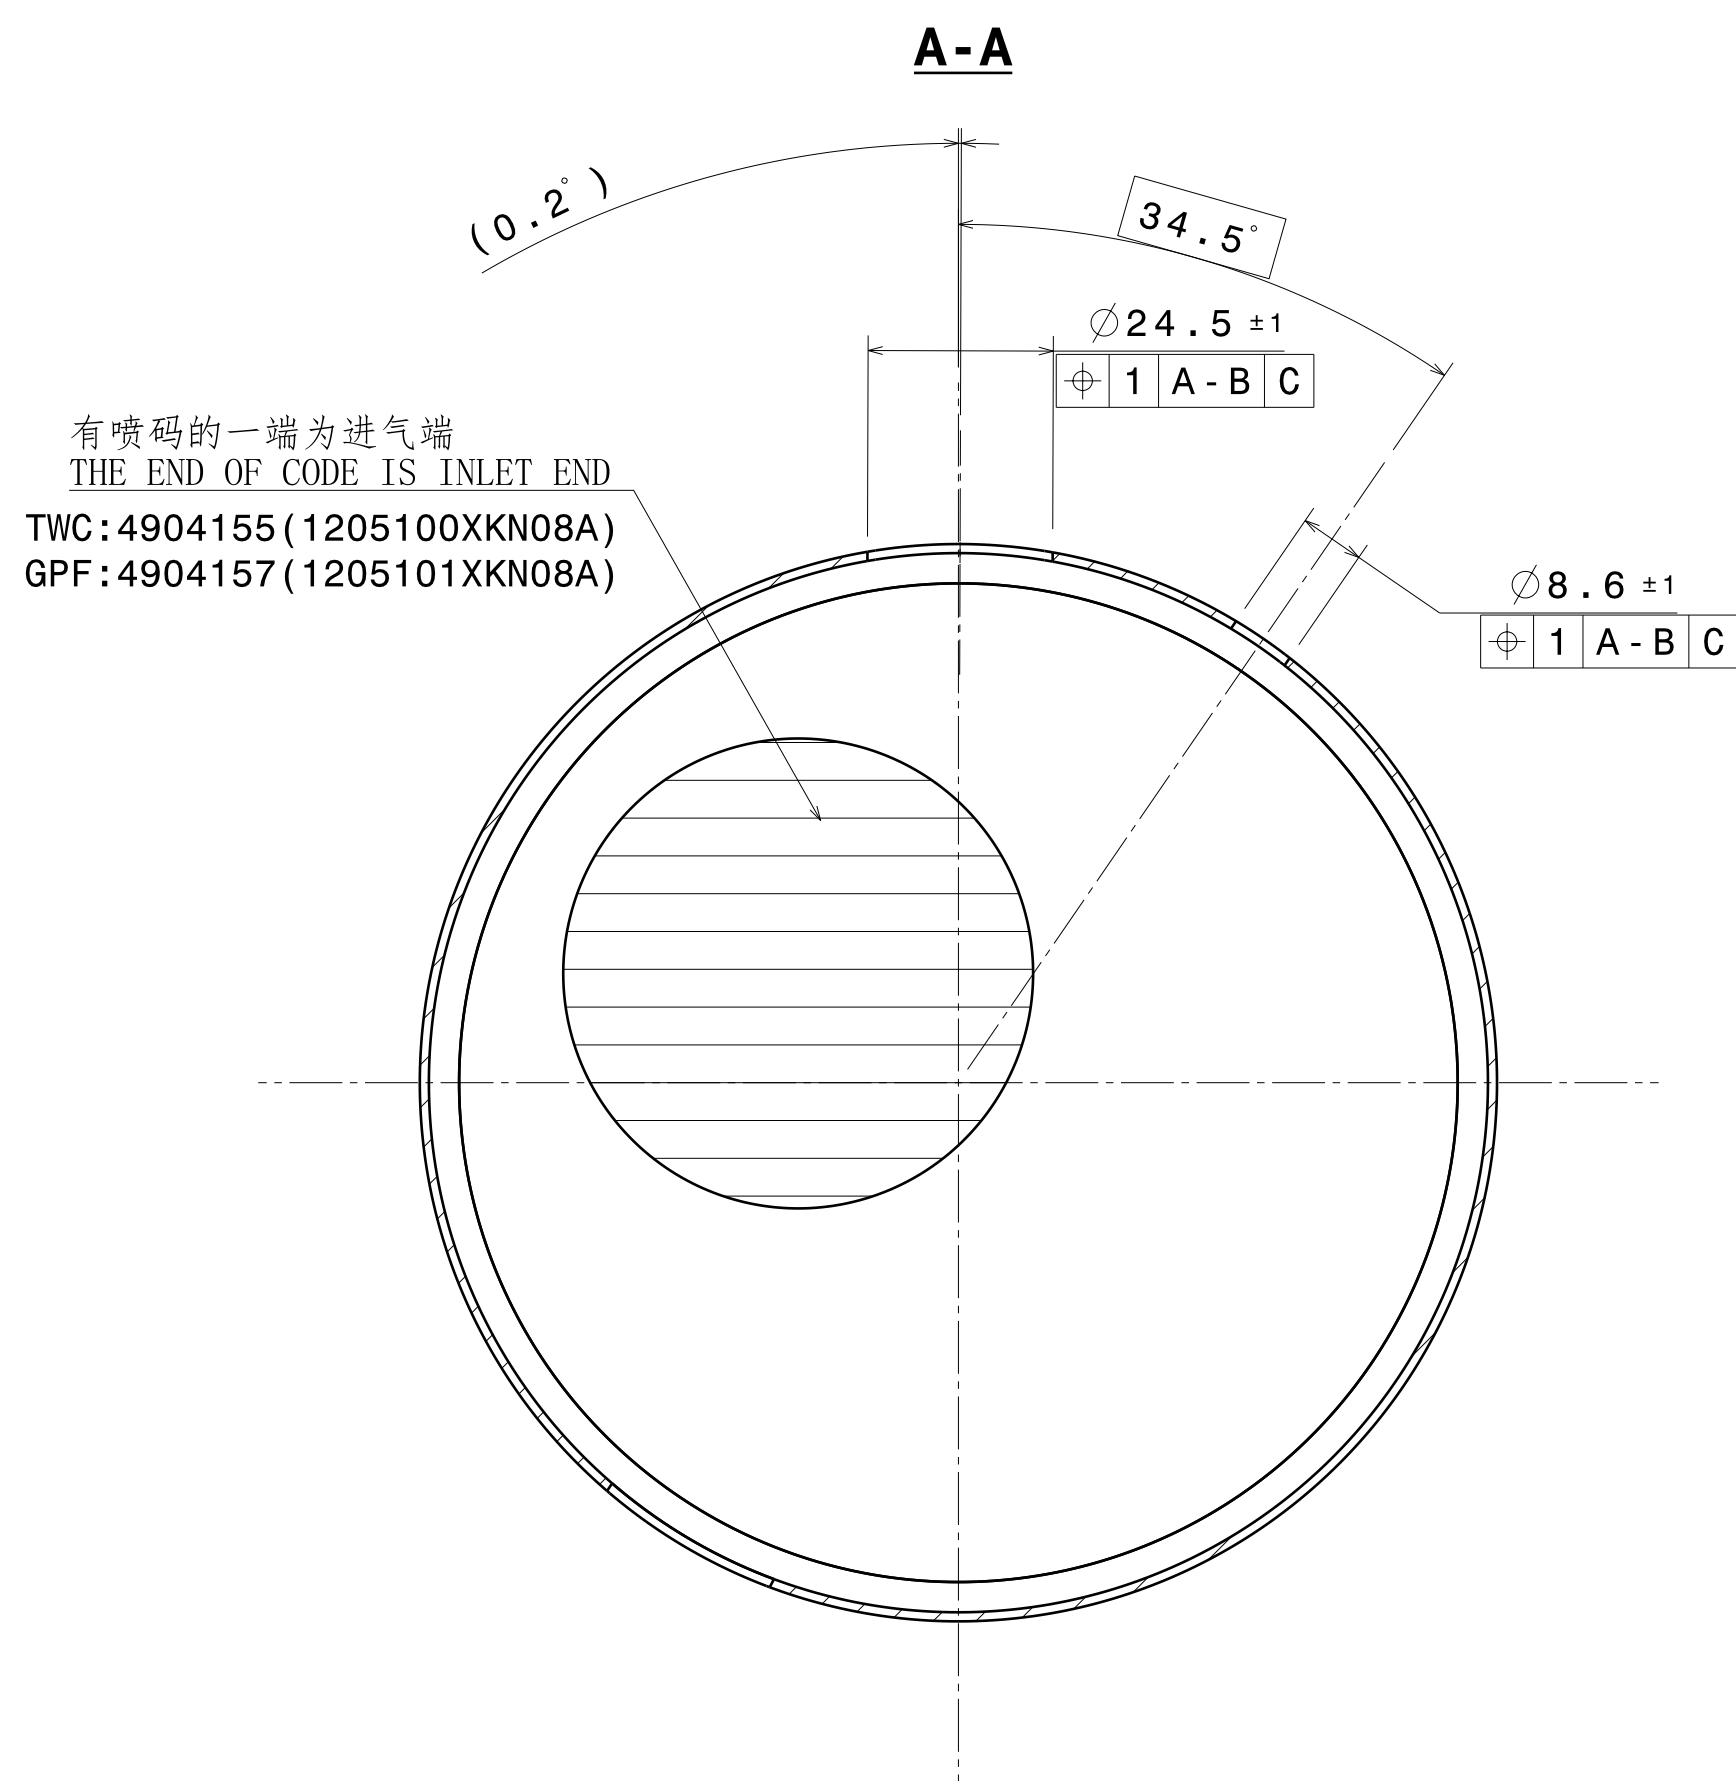

TONGUE AND GROOVE POSITIONING VIEW

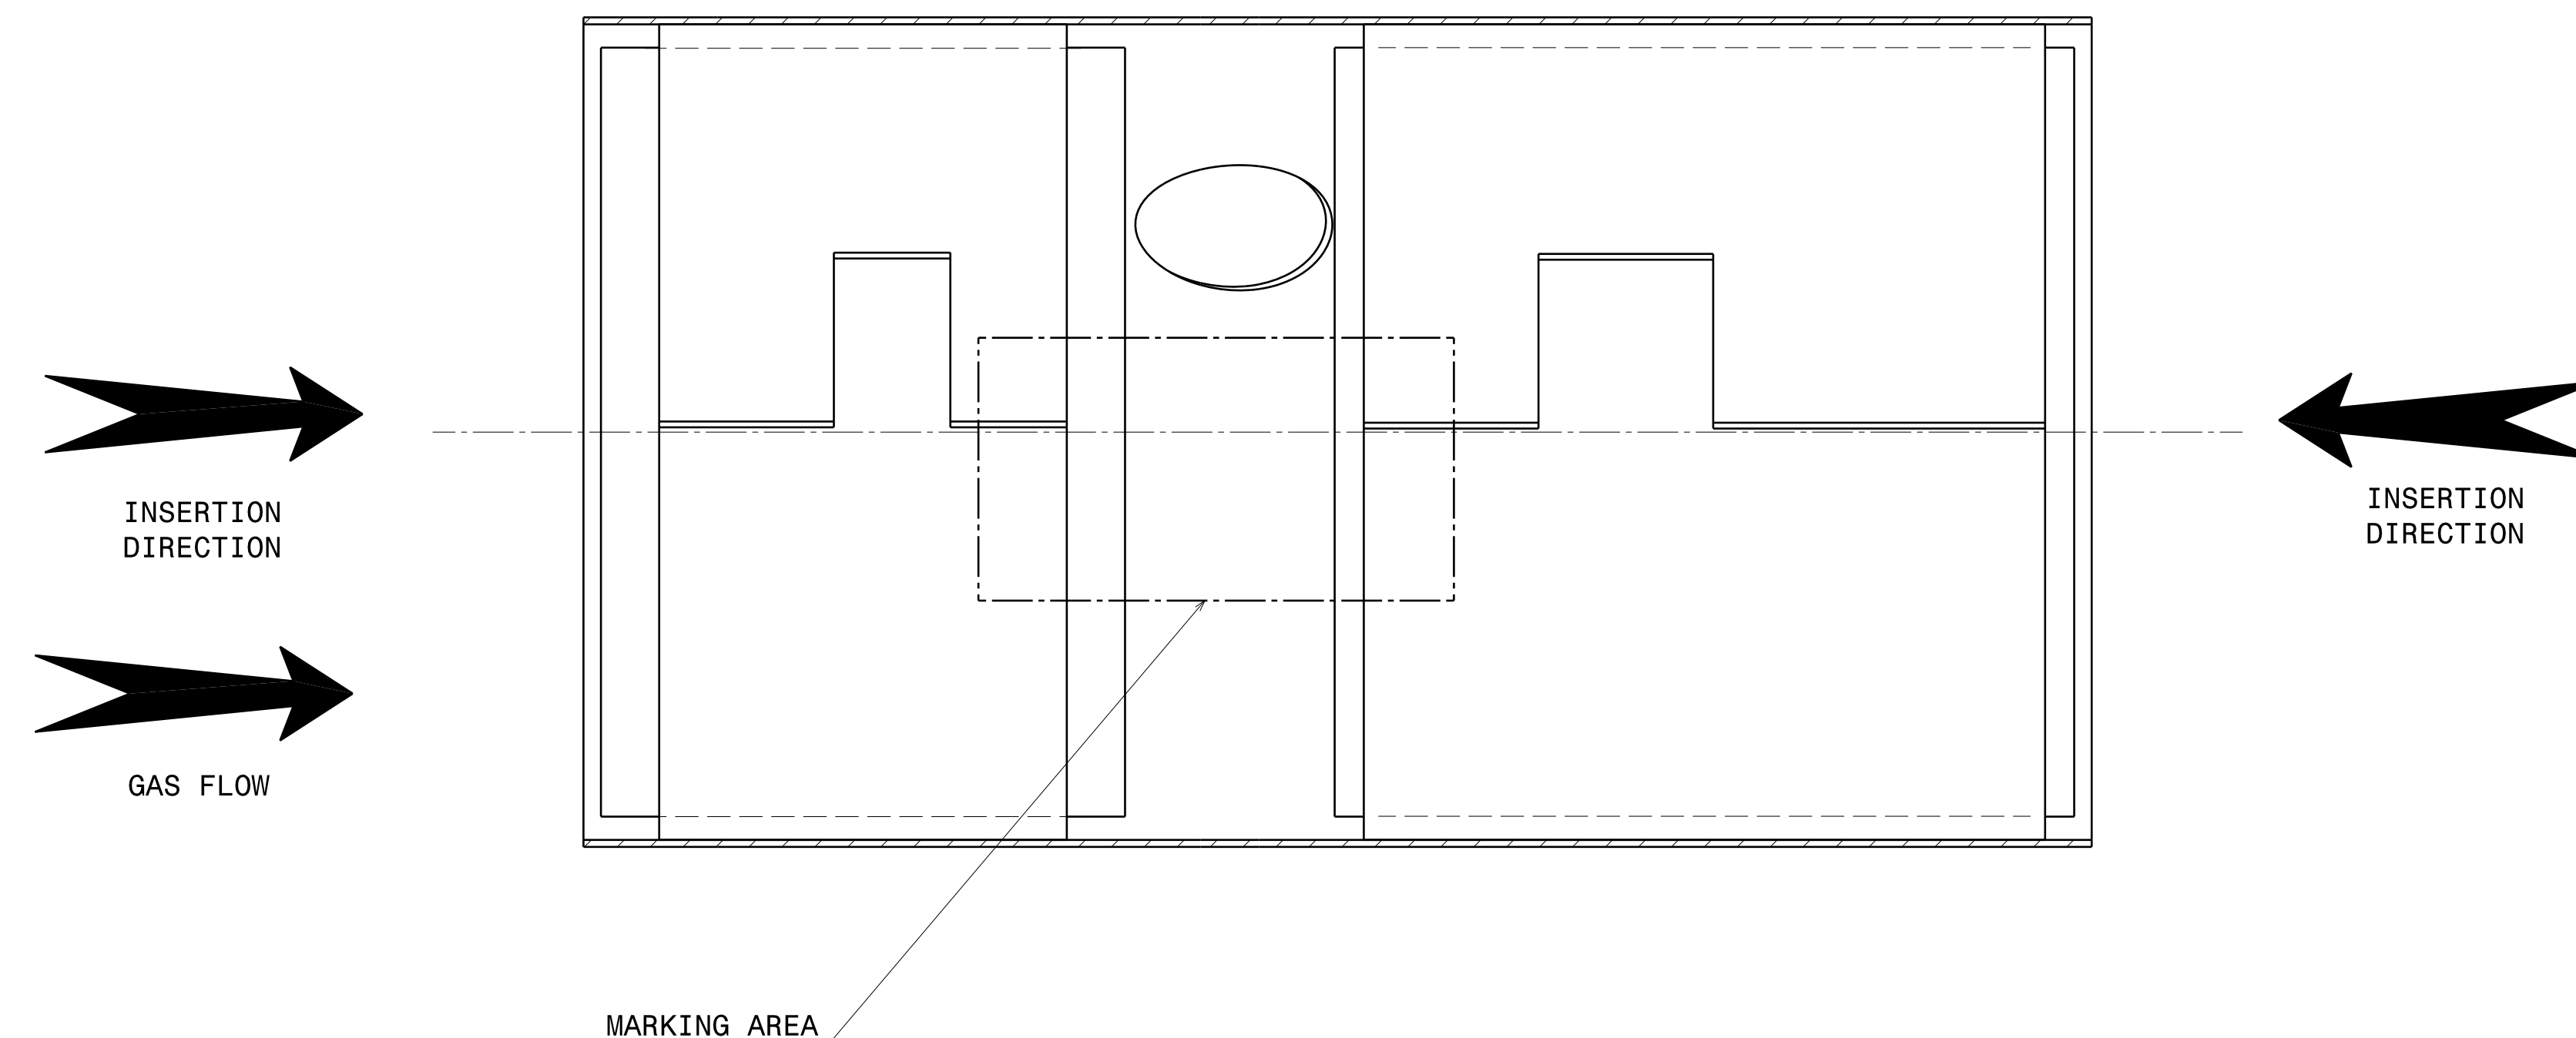

MARKING INFORMATION


Faurecia GWCHZH-G02

FZ:Faurecia ←

ZT:CORNING TC:UMICORE

GENERAL TOLERANCES:


- DIMENSIONS: ± 1
- RADIUS: ± 1
- SHAPE:  2 / PROFILE:  2
- POSITION:  4 A-B C  4 A-B C

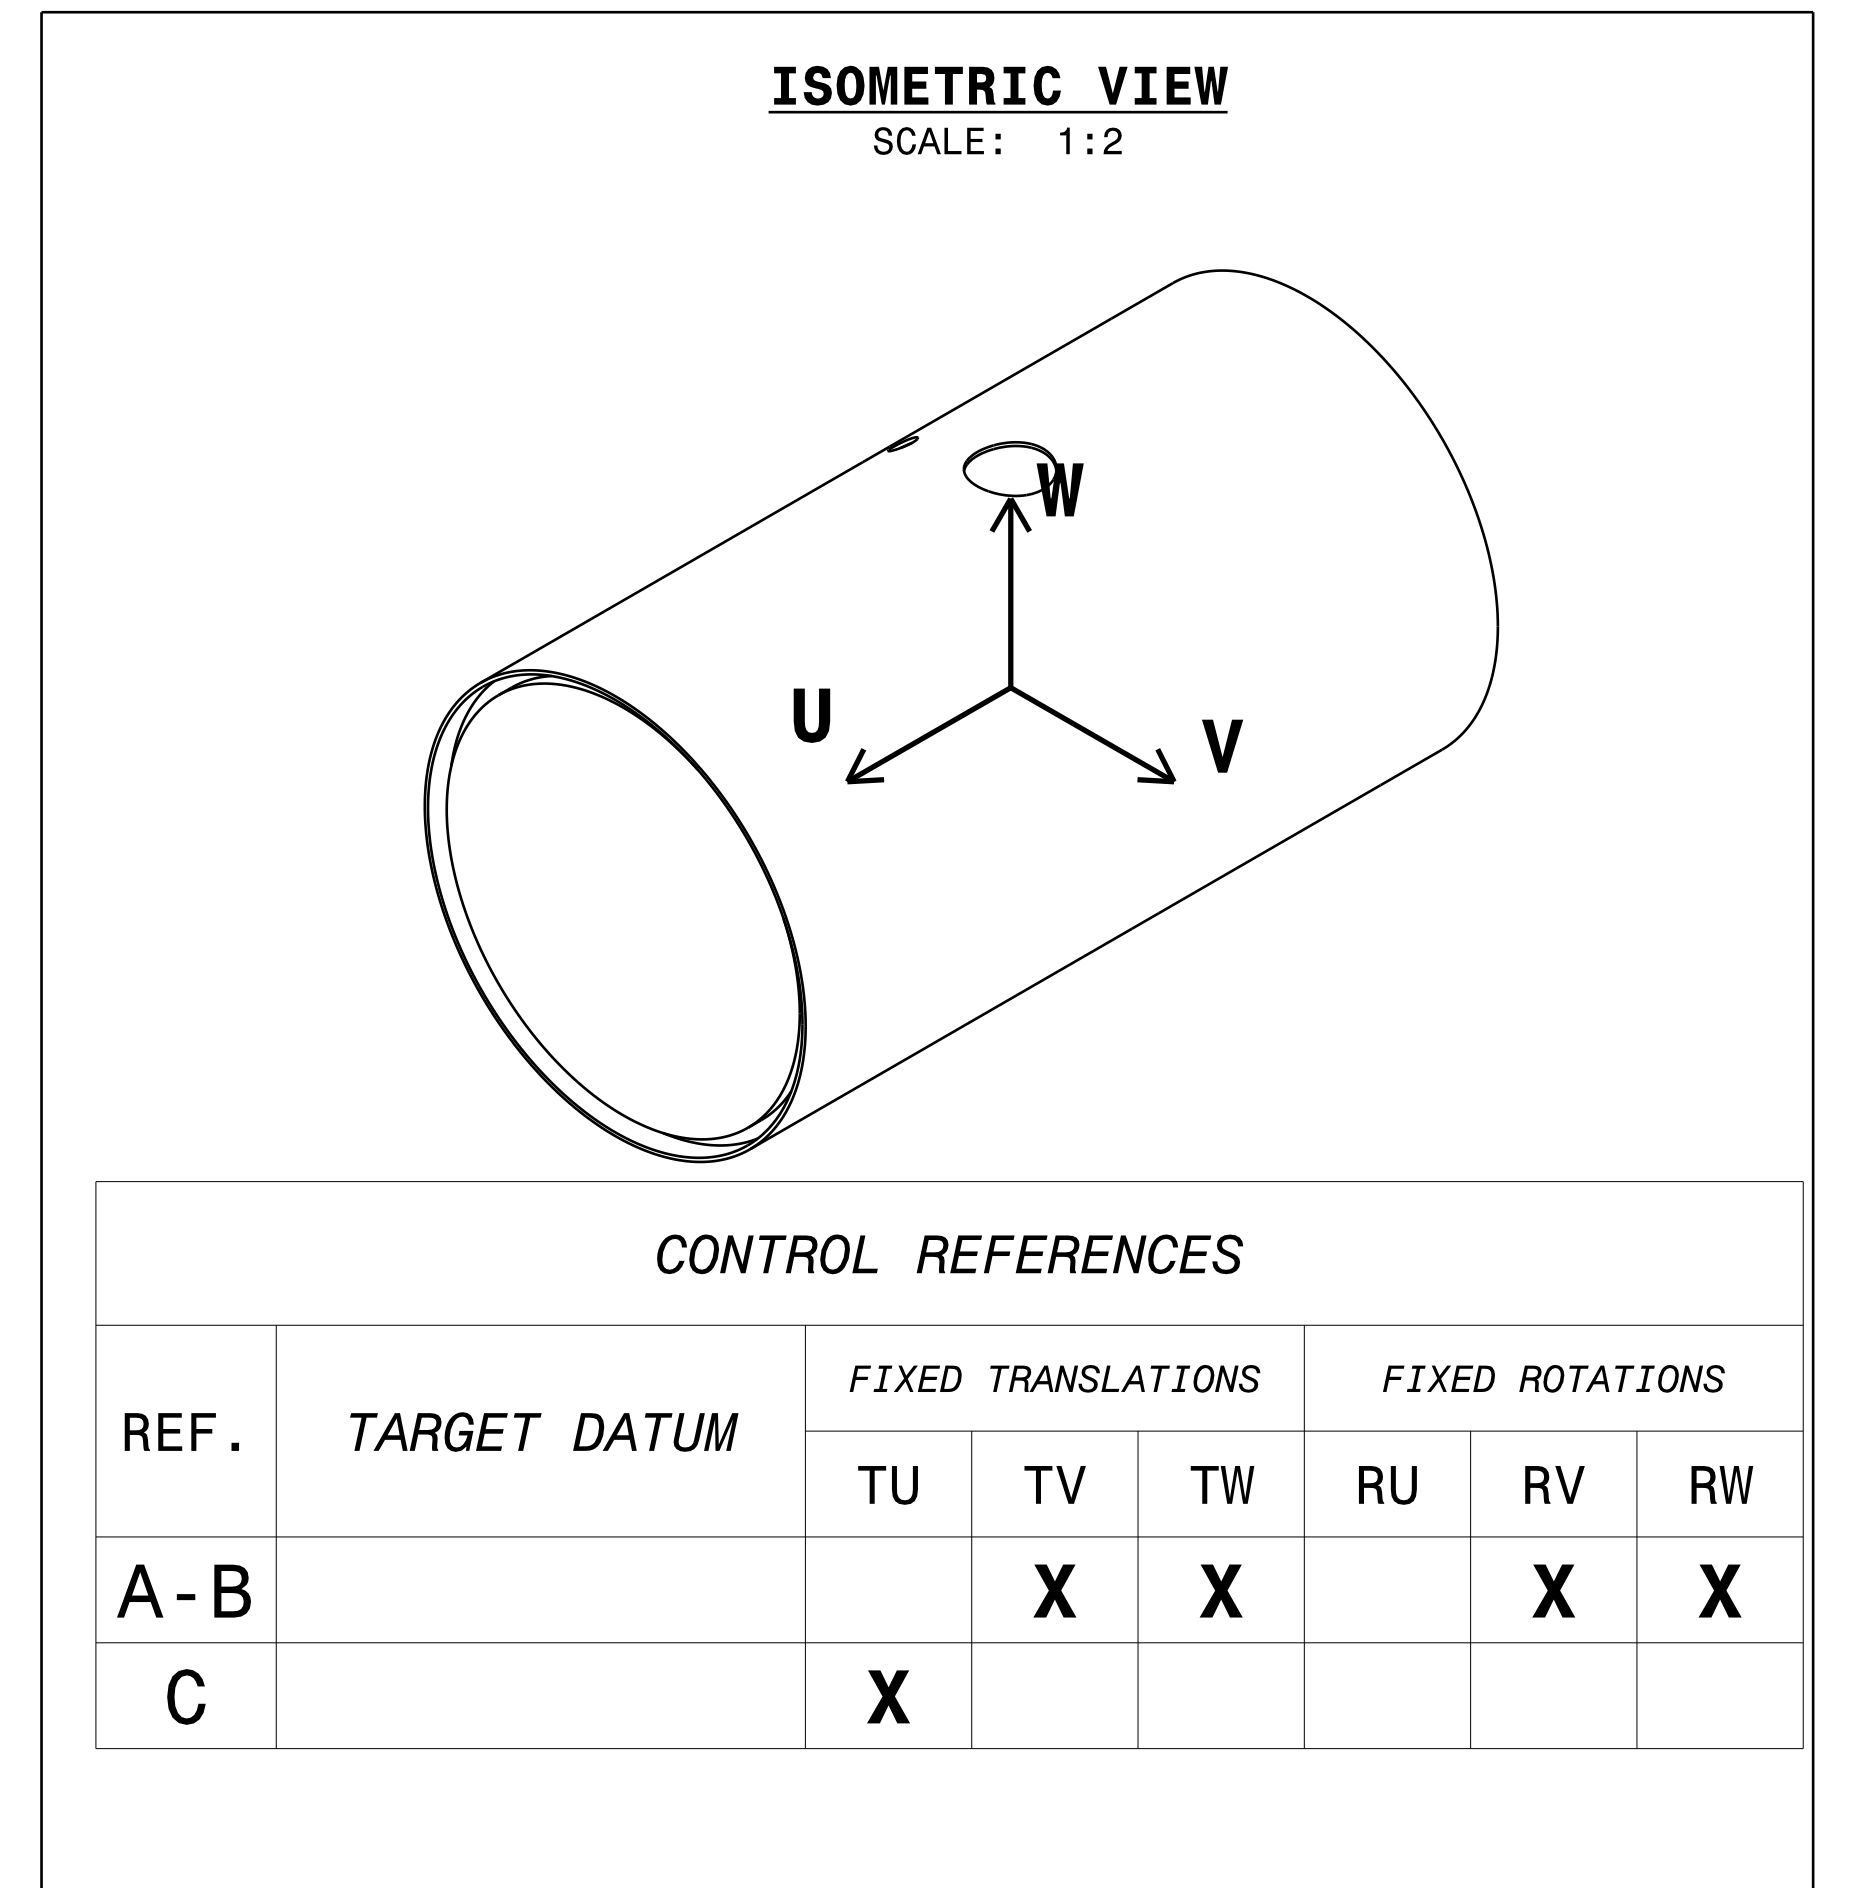

NOTES :

- 1) PROCESS AND OPTION : HARD STUFFING
- 2) NO BURRS OR SHARP EDGES
- 3) SUBSTRATE QUALITY HAS TO RESPECT OEM SPECIFICATION Nr..... OR FCM
SSPECIFICATION Nr FSE-S-DSE-L018 (FOR CATALYST)
OR FSE-S-DSE-L019 (FOR FILTER)
OR FSE-S-DSE-L039 (SEGMENTED)
(FOR FILTER)
- 4) MARKING
 - Δ HOMOLOGATION NUMBER
 - Δ POSITION AND CONTENT
- 5) Δ SUBSTRATE IDENTIFICATION
- 6) SUBSTRATE RECOVERY AS PER FSE-S-PSE-E034
- 7) WHEN MARKING QUALITY IS CHECK BY OCR CAMERA
REFER TO FSE-S-PSE-E131
- 8) DENT AND TOOLING MARKS NOT ABOVE 0.2mm MAXIMUM
- 9) SURFACE CONDITION: SURFACE ENERGY MIN. 32mN/m,
ACCORDING TO FSE-S-PSE-V050
- 10) GAP BULK DENSITY FOR TWC(WITH BINDER)
 - AVERAGE GBD = 0.499
 - MIN GBD = 0.451
 - MAX GBD = 0.559
 - AVERAGE GAP = 4
- 11) GAP BULK DENSITY FOR GPF(WITH BINDER)
 - AVERAGE GBD = 0.499
 - MIN GBD = 0.455
 - MAX GBD = 0.552
 - AVERAGE GAP = 4

F3 12) BOTH SUBSTRATES HAVE THE DIRECTION REQUIREMENTS, THE END OF CODE IS THE INLET END
两个载体有安装方向要求，喷码一端朝向进气端

CO-0085986		F1:MAT RELEASE F2:MAT RELEASE F3:NOTES UPDATE F4:MASS UPDATE		2025-11-28		1gao yang		LI BIN			
E	CO-0085962	DA RELEASE		2025-09-01		1gao yang		LI BIN			
D	CO-0082498	D1:UPDATE BOM MASS D2:MASS WAS 2.661		2025-07-01		1gao yang		LI BIN			
C	CO-0077193	C1: ITEM 4 AND 5: DIMENSIONS UPDATED C2: ADDED CUSTOMER PN OF ITEM 2 & 3		2025-02-05		1PATIMAN		LI BIN			
B	CO-0076589	FOR DA RELEASE		2025-01-17		1PATIMAN		LI BIN			
A	-	FIRST RELEASE		2024-11-29		KRISHNA		LI BIN			
REV CHANGE ORDER DESCRIPTION OF ALTERATION				DATE		DRAWN		CHECKED			
DRAWING TOLERANCES OTHERWISE SPECIFIED											
TOLERANCING:		WORKPIECE EDGES:		FORBIDDEN CHEMICALS:							
ISO 8015		ISO 13715		FSE - S-PSE -G009/EN							
GENERAL TOLERANCES:		SURFACE TEXTURE:		WELDING:		ISO 2553					
ISO 2768 -CL		ISO 1302									
CUSTOMER / PLATFORM / ENGINE/ PROJECT				CUSTOMER NUMBER							
GWM DE09				-							
REMARK		DATE		KEY CHARACTERISTICS: FAU-S-DSG-3530							
CCT ID TWC: 25705		2024-11-29		0 x  5 x  /SHEET							
CCT ID GPF: 25702		DRAWN		1gao yang							
		CHECKED		LI BIN							
MATERIAL				SCALE		FORMAT		SHEET		CAD SYSTEM	
SEE BOM				1:1		A0		1/1		CATIA V5R2	
-				FIRST ANGLE		MASS (KG)		MEASURED		ESTIMATED	
NAME						2.652				x	
CONVERTER SUB-ASSEMBLY				REPLACE DWR N° / REVIS°		DRAWING NUMBER		REVISION			
催化器总成						4904153				F	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETRES. DO NOT SCALE. THE 3D CAD DATA IS THE THEORETICALLY EXACT MASTER FOR DIMENSIONS NOT SHOWN ON THIS DRAWING.											
THE REPRODUCTION, DISTRIBUTION OR UTILIZATION OF THIS DOCUMENT AS WELL AS COMMUNICATION OF ITS CONTENT TO THIRD PARTIES WITHOUT THE PRIOR WRITTEN AUTHORIZATION OF FAURECIA OR ANY LEGAL SUCCESSOR IS STRICTLY PROHIBITED. OFFENDERS WILL BE LIABLE FOR THE PAYMENT OF DAMAGES. ALL RIGHTS RESERVED FOR THE ORIGINATOR OF INTELLECTUAL PROPERTY RIGHTS.											

Drawing is Released.Part 4904153 Rev 07 Released , PURPOSE is SERIAL.