



# AINZARA ALUMINUM & GLASS PROCESSING


Industrial Area, Tripoli, Libya | P.O. Box 82144 | Tel: +218 92 429 5050 | info@ainzara.ly

ARCHITECTURAL SYSTEMS DIVISION | OFFICIAL TECHNICAL SPECIFICATION SHEET

## SLAT 64 - Monorail & Multi-Rail Sliding System

SERIES: ARTOS SERIES | SYSTEM CODE: SLAT64 | EXTRUSION: EN AW-6063 T6

### ENGINEERING 2D CAD PROFILE SCHEMATIC

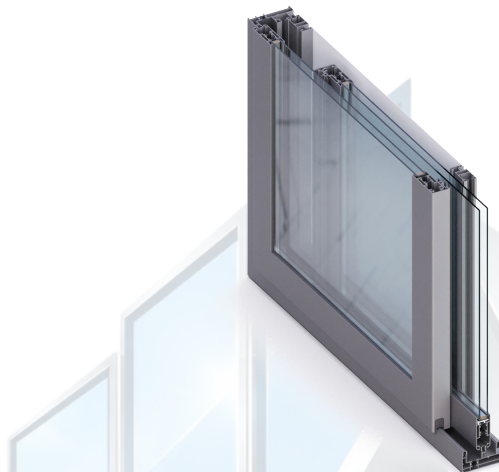

### MECHANICAL & ARCHITECTURAL SPECIFICATION MATRIX

### MANUFACTURING STANDARD

|                                 |                                                |
|---------------------------------|------------------------------------------------|
| Base Aluminum Alloy             | EN AW-6063 T6 (Extrusion to EN 12020-2)        |
| Frame Architectural Depth       | 64 mm (2-Rail) / 112 mm (3-Rail)               |
| Sash / Vent Profile Depth       | 38 mm Curved / Interlocking Sash               |
| Glazing Thickness Capacity      | 18 mm - 28 mm Insulated Glazing                |
| Thermal Barrier Insulation      | Standard Non-Thermal / Interlock Brush Gaskets |
| Air Permeability (EN 12207)     | Class 3 (EN 12207 / 450 Pa)                    |
| Water Tightness (EN 12208)      | Class 7A (EN 12208 / 300 Pa)                   |
| Wind Load Resistance (EN 12210) | Class C3 (EN 12210 / 1200 Pa)                  |
| Acoustic Sound Reduction        | Rw = 32 - 36 dB                                |
| Maximum Sash Weight Capacity    | 160 kg per Sash                                |

### FABRICATION STANDARDS & QUALITY COMPLIANCE

- Extrusion Tolerances: Conforms strictly to EN 12020-2 / DIN 17615 high precision architectural standard.
- Surface Coating: Qualicoat Certified Electrostatic Powder Coating (60-80 microns) / Qualanod Anodizing (15-20 microns).
- Gaskets: EPDM weatherseals according to DIN 7863. Hardware groove: Standard European groove compatibility.
- Quality Management: Extruded and assembled under certified ISO 9001:2015 industrial manufacturing systems.

**FACTORY DIRECTIVE:** Official technical specifications verified for tender submissions, fabrication, and structural installation.

**DIRECT CONTACT:** +218 92 429 5050 | +218 91 614 1616 | Tripoli Industrial Complex, Libya | www.ainzara.ly