




AUDIO TECHNOLOGY UE03



TASK1: BINAURAL LISTENING / ROUTING

- connect to a motu audio interface
- open the motu discovery and then the routing matrix
- set the 'from computer' to 24 and 'to computer' to 24
- route all analog inputs directly to your DAW
- route all channels from your DAW directly to hardware outputs incl. headphone output


-> open reaper

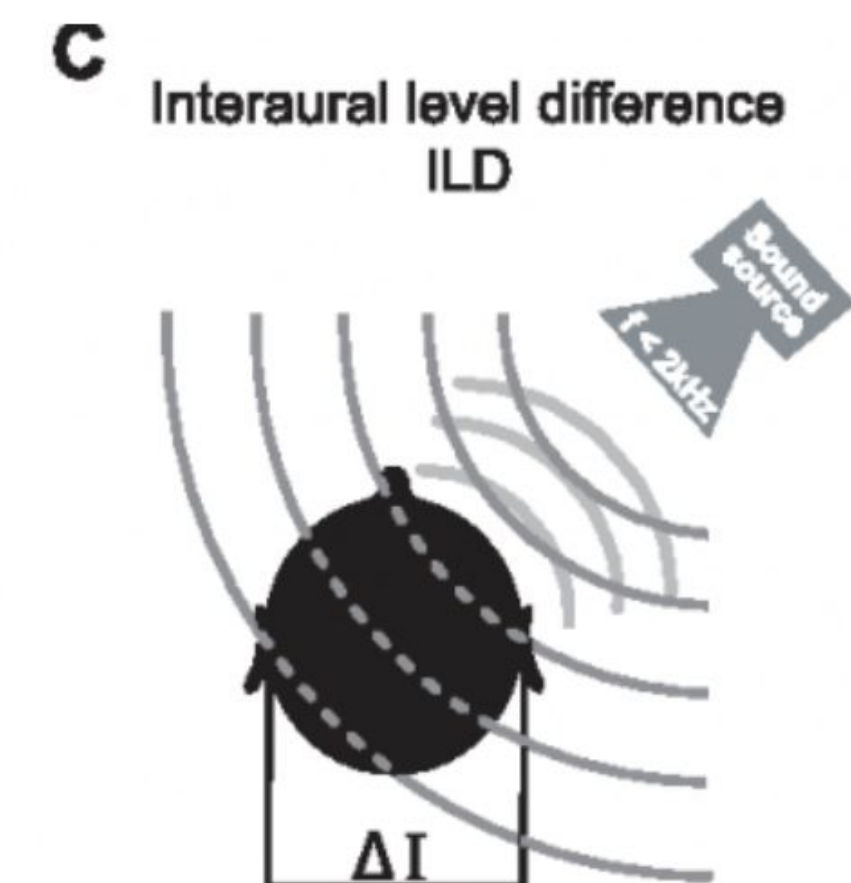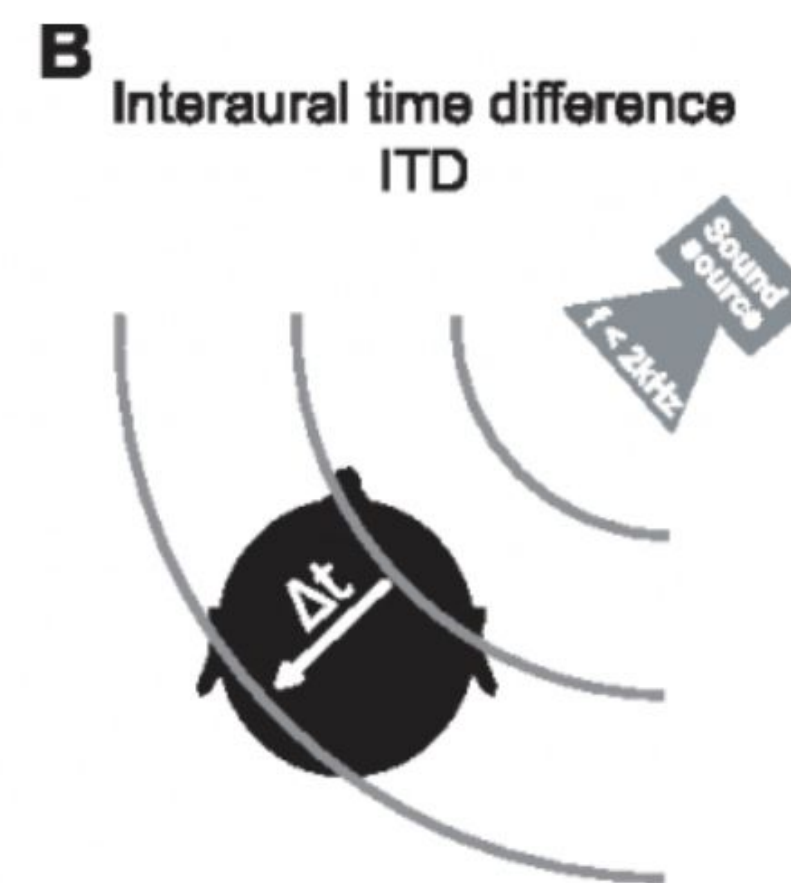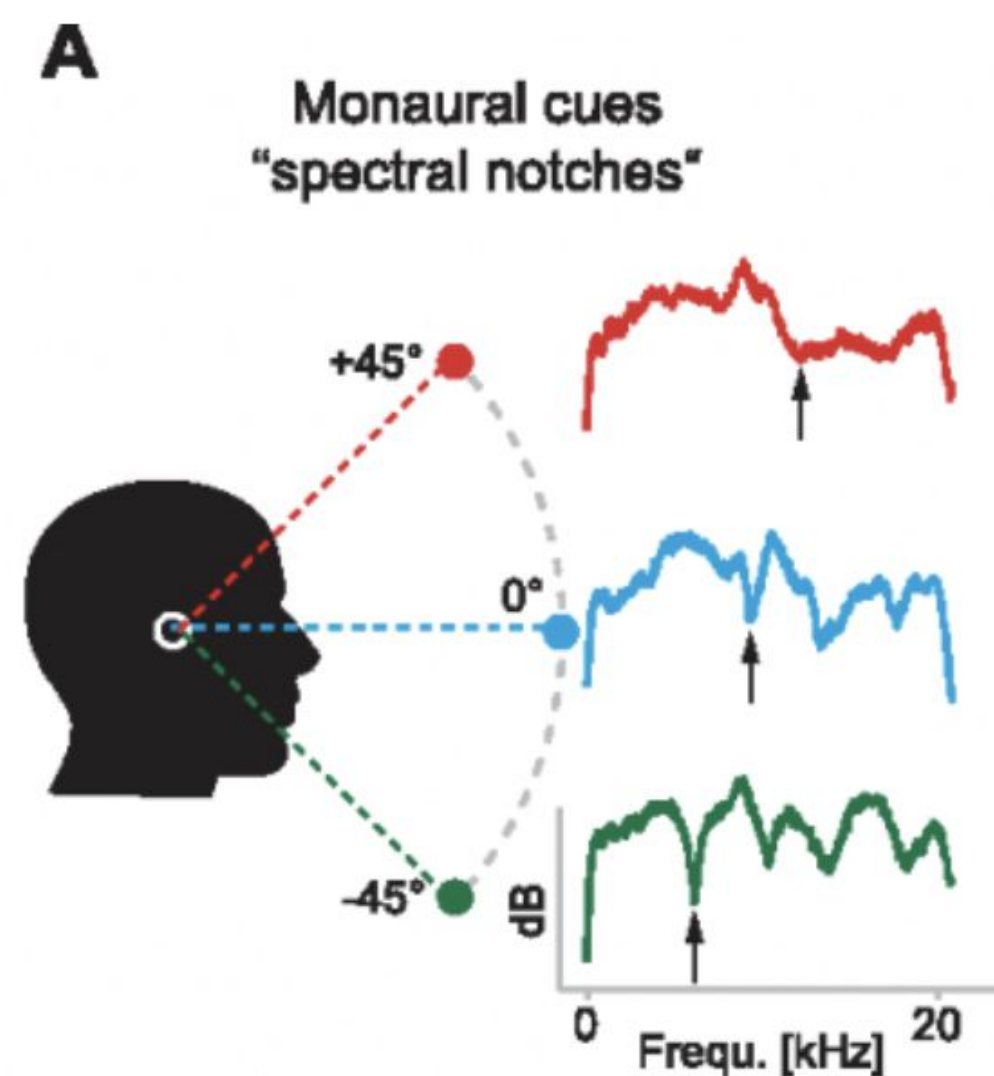

TASK1: BINAURAL LISTENING / ROUTING


- open the Hagenberg Pie Space reaper template
 - mute the 'SimpleDecoder' and unmute 'BinauralDecoder'
 - create a send on the 'BinauralDecoder' that goes to the channels you just routed to the headphone output
-
- play a sound on a source track going to the MultiEncoder. Check the multichannel send to ambisonics bus and from there to the BinauralDecoder.
 - listen with headphones and move the sound source in the MultiEncoder

"Head Related Transfer Function" (HRTF)

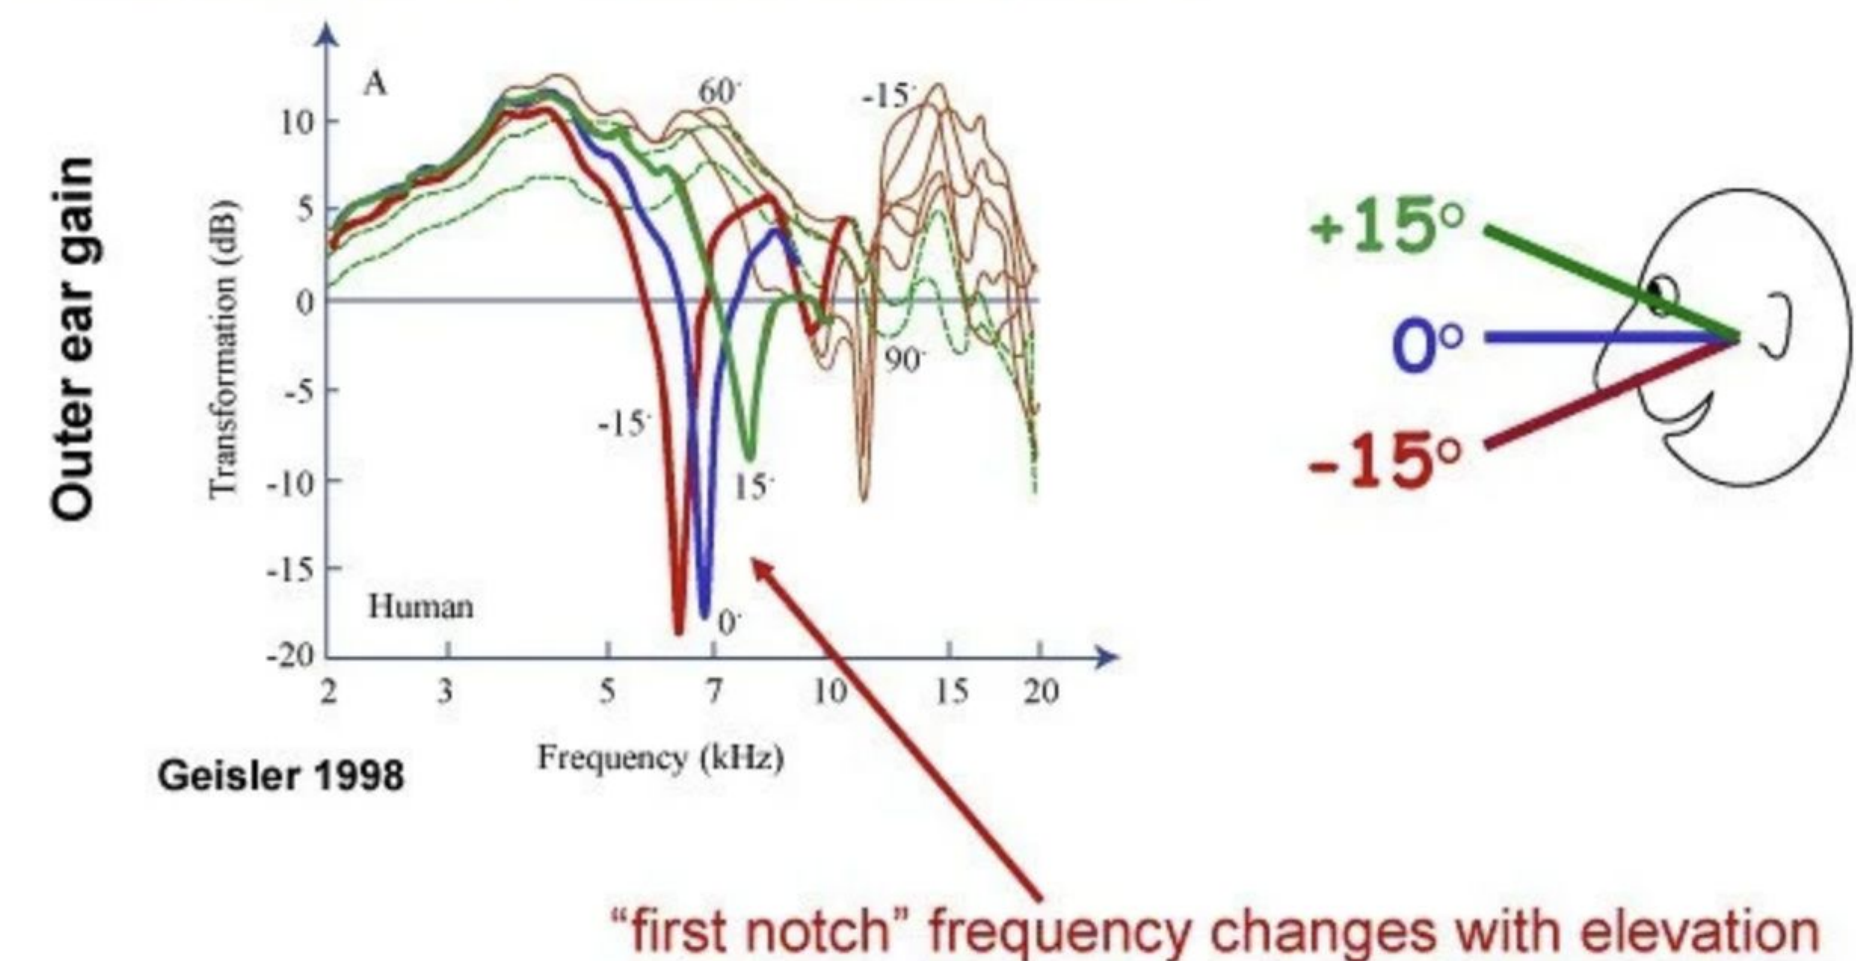

TASK2: LISTENING THROUGH SPEAKERS / SETTING UP AUDIO NETWORK

- connect your audio interface to the audio network
 - under DEVICE select 'internal' as clock source
 - go to the 24AO tab and select the audio interface you are connected to via USB as clock source
 - back to the motu routing matrix
 - create 3 AVB streams
 - send 'from computer' 1- 24 to those AVB streams
 - select those streams as input streams 1, 2 and 3
 - route those input streams to analog outputs on the 24AO
- > open reaper

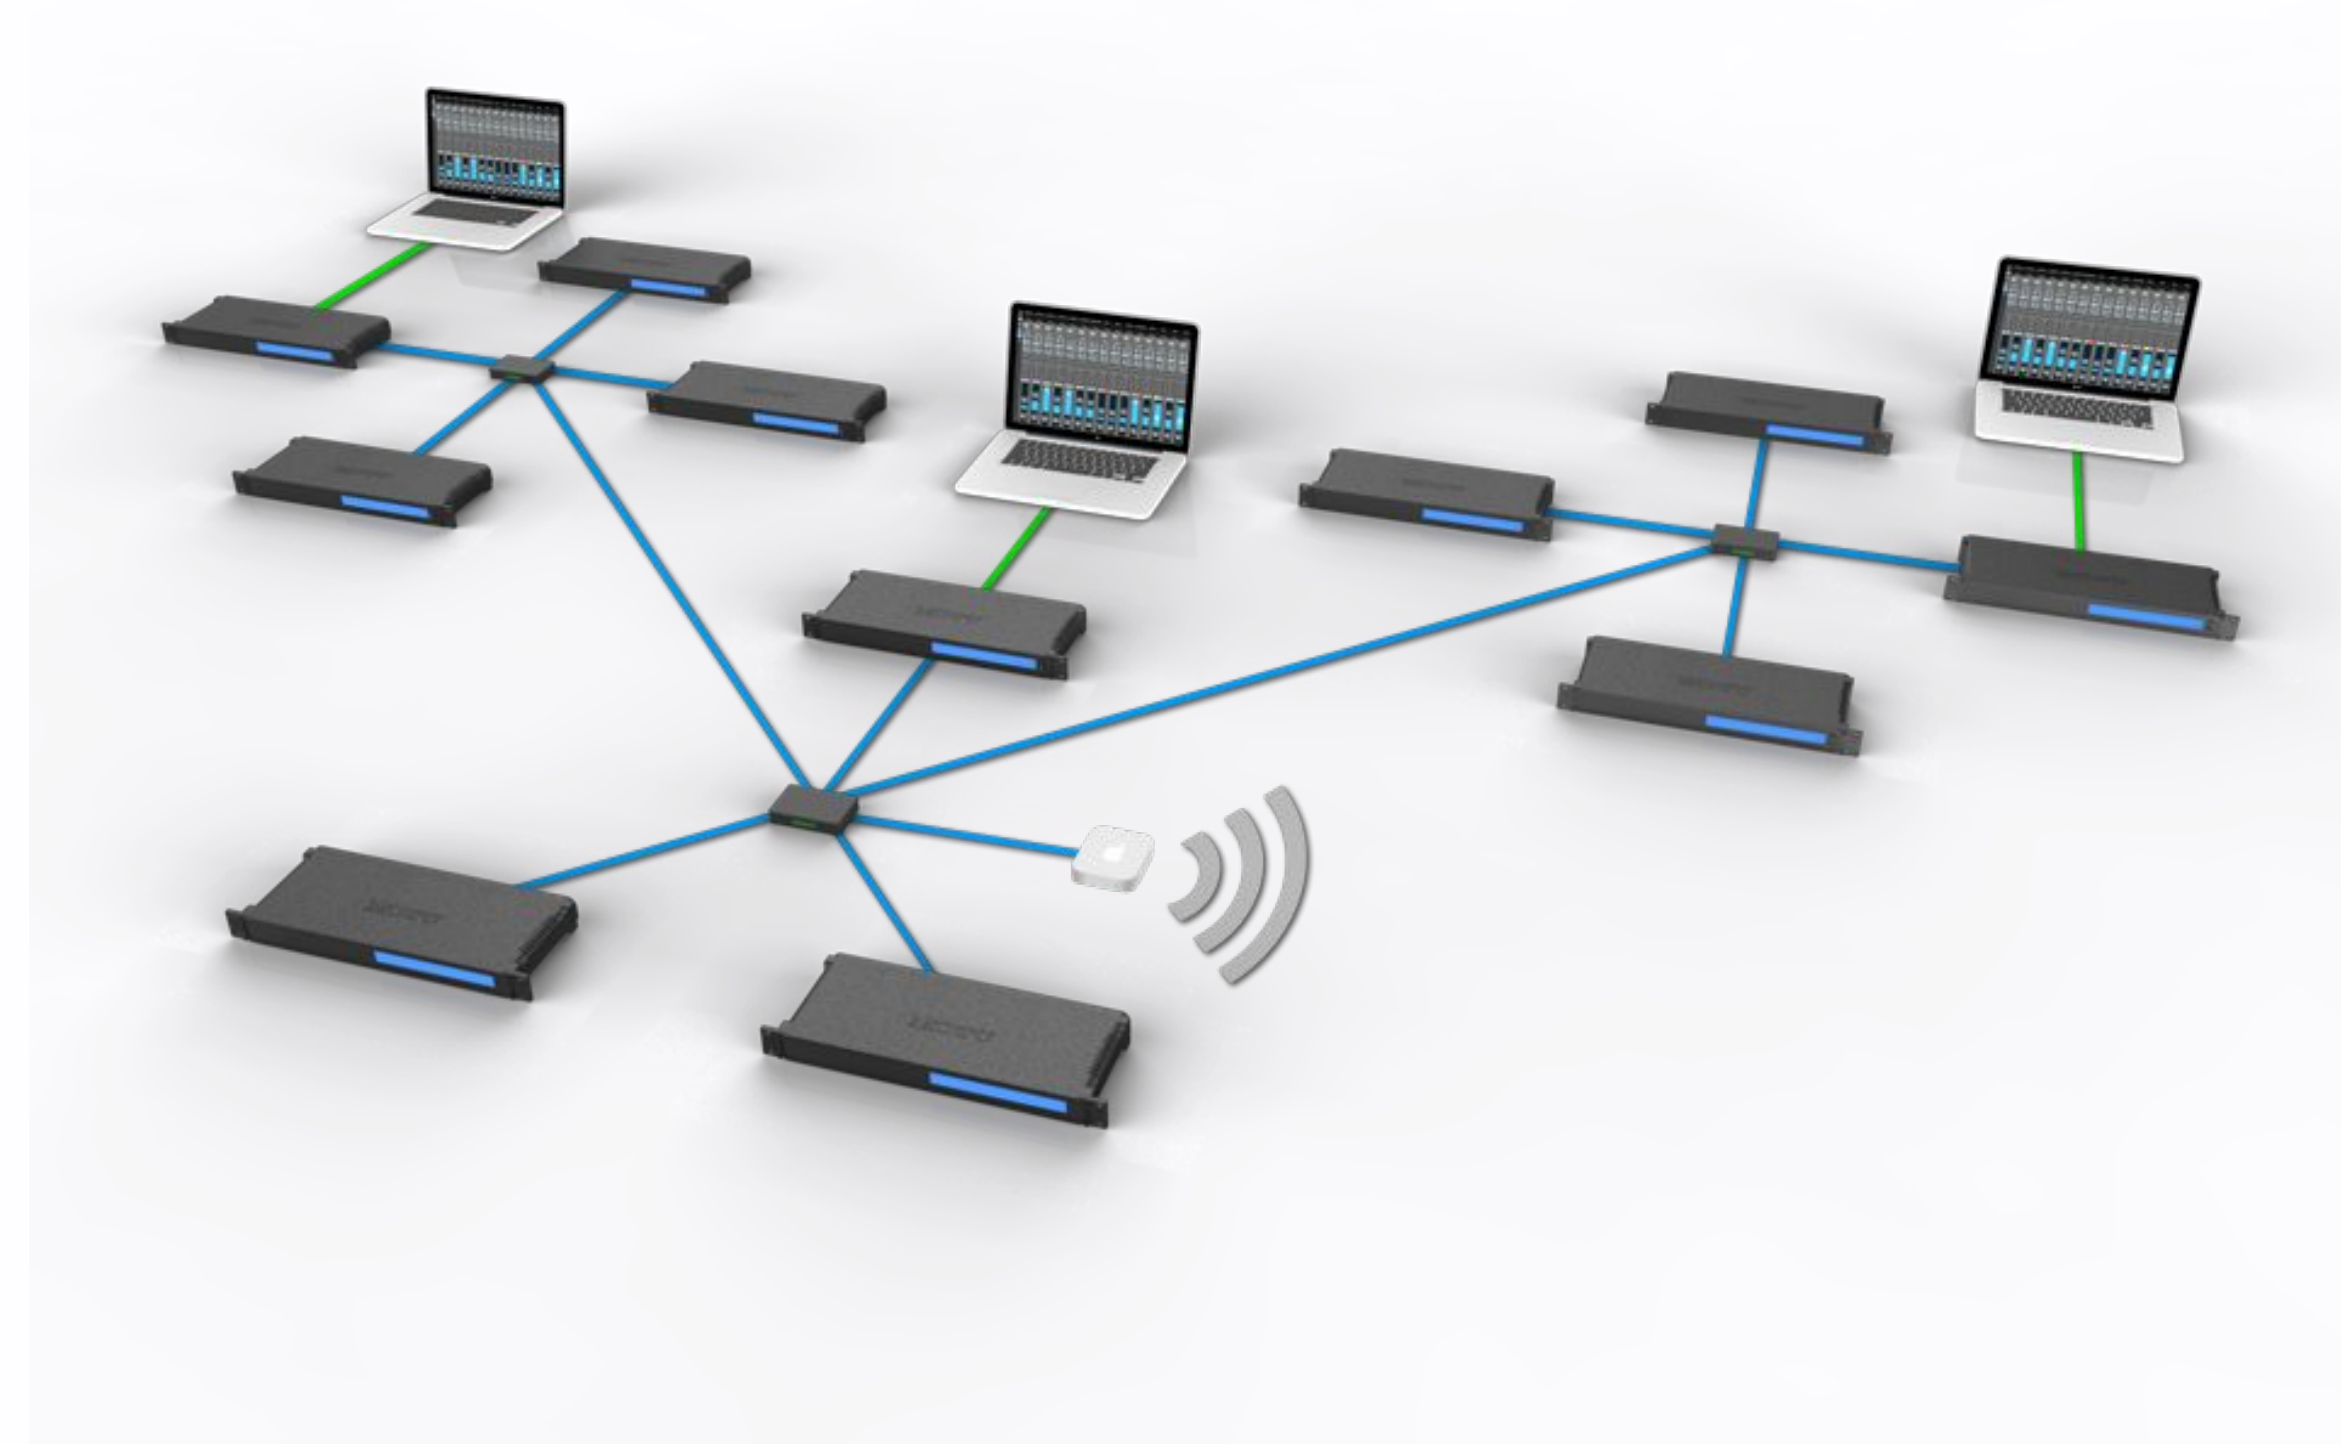

TASK2: LISTENING THROUGH SPEAKERS / SETTING UP AUDIO NETWORK

- open the Hagenberg Pie Space reaper template
- mute the 'BinauralDecoder' !!! and unmute 'SimpleDecoder'
- turn down the volume on the SimpleDecoder track!!!
- play a sound and bring up the volume
- listen and perceive the difference in localization compared to binaural rendering

