

**Name : Selly Amelia Putri**

**Class : SIB 4C**

## **Lab - Gather System Information After an Incident**

### **Objectives**

- Collect system information after an incident has occurred.
- View logs for potential intrusions.

### **Background / Scenario**

When an incident occurs in an organization, people responsible must know how to respond. An organization needs to develop an incident response plan and put together a Computer Security Incident Response Team (CSIRT) to manage the response. In this lab, you will gather system information and review logs after an incident has occurred. Doing these tasks immediately after the incident is important because any data residing in RAM will be gone when the system is shut down.

### **Required Resources**

PC with the **CSE-LABVM** installed in VirtualBox

### **Instructions**

#### **Step 1: Open a terminal window in the CSE-LABVM.**


- a. Launch the **CSE-LABVM**.
- b. Double-click the **Terminal** icon to open a terminal.

#### **Step 2: Collect volatile information of the compromised system.**

In this step, you will create a file called **report.txt** that includes a variety of system information that can be used for incident analysis. This report can then be transferred to a USB drive, emailed, or uploaded to a cloud server to preserve the information. Then the system can be taken down.


- a. Switch to the root user with the **sudo su** command. Enter **password** as the root password.

```
cisco@labvm:~$ sudo su
[sudo] password for cisco: password
root@labvm:/home/cisco#
```

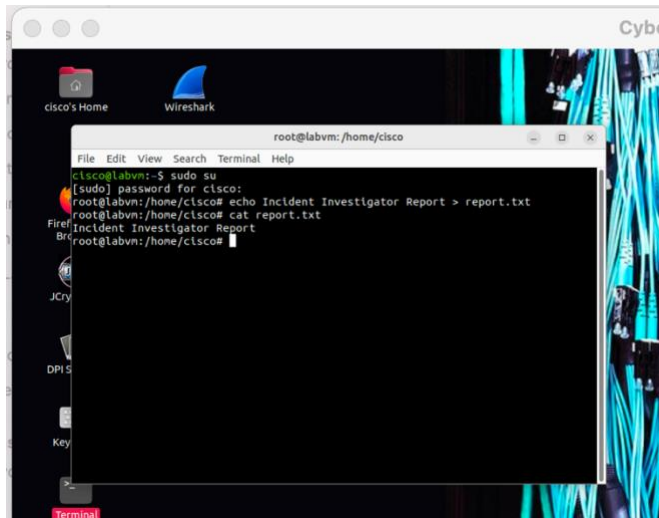

- b. Enter the **echo** command, and then specify a heading for a newly created file named **report.txt**. Enter the **cat** command to review the new file.


```
root@labvm:/home/cisco# echo Incident Investigator Report > report.txt
root@labvm:/home/cisco# cat report.txt
Incident Investigator Report
root@labvm:/home/cisco#
```

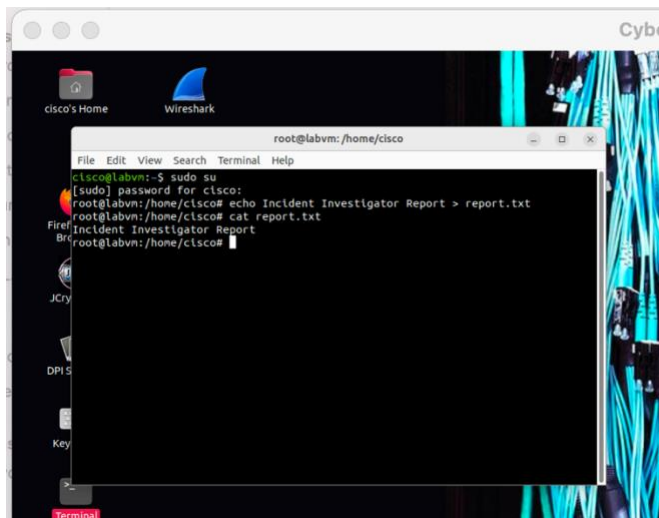

- c. Enter the **date** command and redirect the date and timestamp to the **report.txt** file. Be sure to use the double angle brackets (**>>**) to append to the **report.txt** file. Otherwise, you will replace the previous content.


**Note:** To better document the content stored in **report.txt**, use the **echo** command to add a subheading as shown here for **Start Date and Time**. Each substep will specify a subheading for you to append before you gather information.

```
root@labvm:/home/cisco# echo =====Start Date and Time===== >> report.txt
root@labvm:/home/cisco# date >> report.txt
```

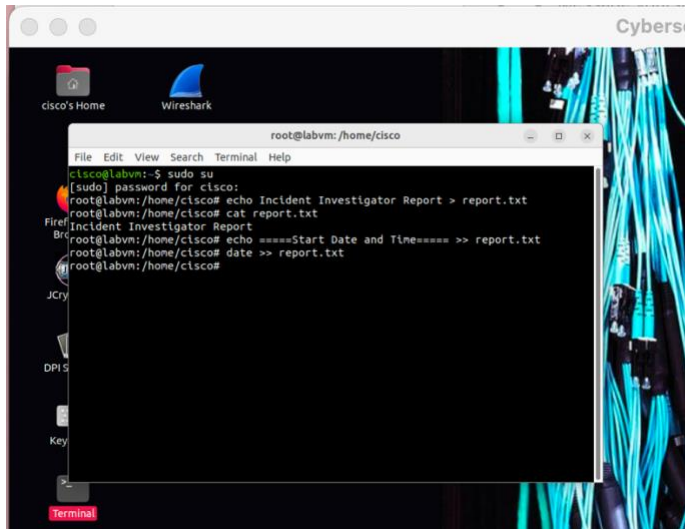


- d. Enter the **uname** command to print system information. Use the **-a** option to append all system information to the **report.txt** file.

```
root@labvm:/home/cisco# echo =====System Information===== >> report.txt
root@labvm:/home/cisco# uname -a >> report.txt
```

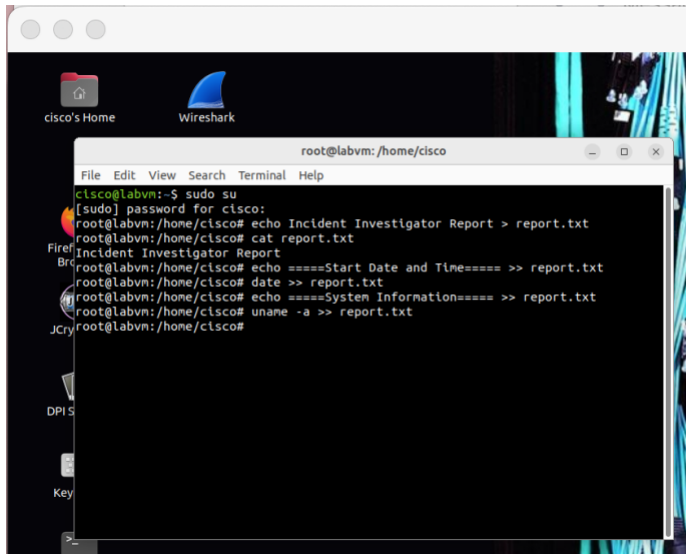


- e. Enter the **ifconfig -a** command and append all network interface information to the **report.txt** file.

```
root@labvm:/home/cisco# echo =====Network Interfaces===== >> report.txt
root@labvm:/home/cisco# ifconfig -a >> report.txt
```

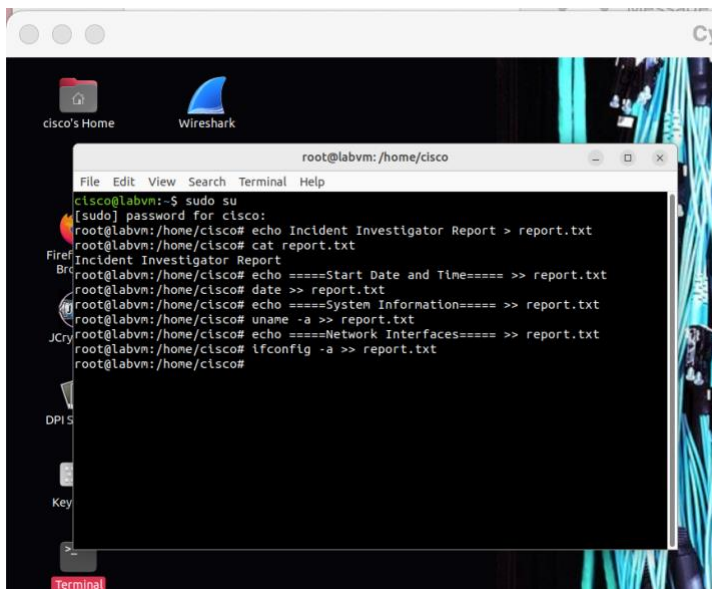


- f. The **netstat** command can collect all the network statistics. Enter the command with the options **-ano** to collect data on all sockets (**-a**), IP addresses instead of domain names (**-n**), and information related to networking times (**-o**). Append the output to the **report.txt** file.

```
root@labvm:/home/cisco# echo =====Network Statistics===== >> report.txt
root@labvm:/home/cisco# netstat -ano >> report.txt
```

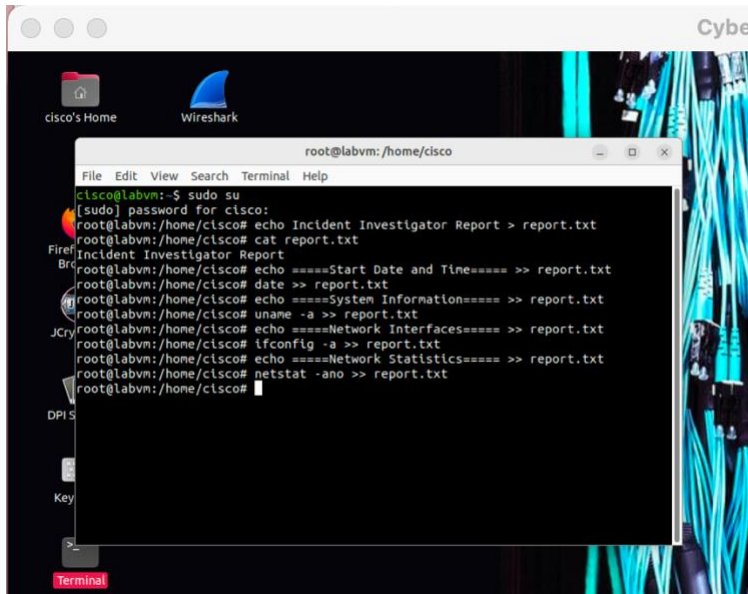


- g. The **ps** command reports a snapshot of the current processes running on the system. Enter the command with the options **-axu** to list every process running on the system (**-a** and **-x**) and in a user-oriented format (**-u**). Append the output to the **report.txt** file.

```
root@labvm:/home/cisco# echo =====Processes===== >> report.txt
root@labvm:/home/cisco# ps axu >> report.txt
```

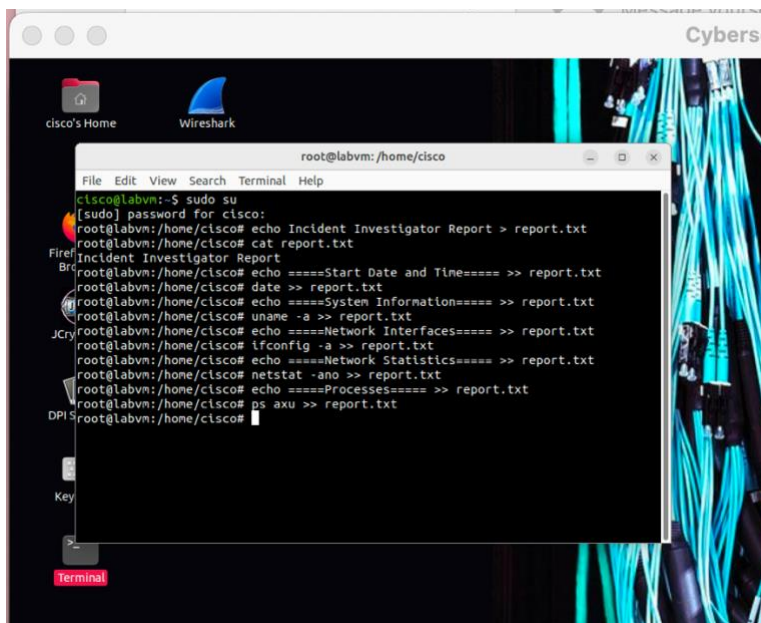


- h. The **route** command lists the routing table currently used by the system. Enter the command with the option **-n** to list IP addresses instead of trying to determine host names. Append the output to the **report.txt** file.

```
root@labvm:/home/cisco# echo =====Routing Table===== >> report.txt
root@labvm:/home/cisco# route -n >> report.txt
```

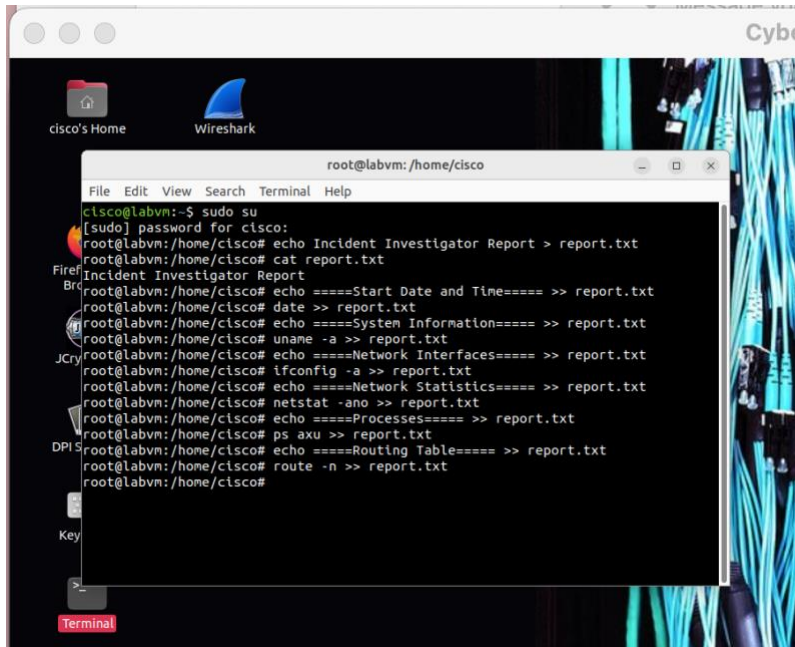

- i. Enter the **date** command and append the date and timestamp to the end of the file to complete the report.

```
root@labvm:/home/cisco# echo =====End Date and Time===== >> report.txt
root@labvm:/home/cisco# date >> report.txt
```

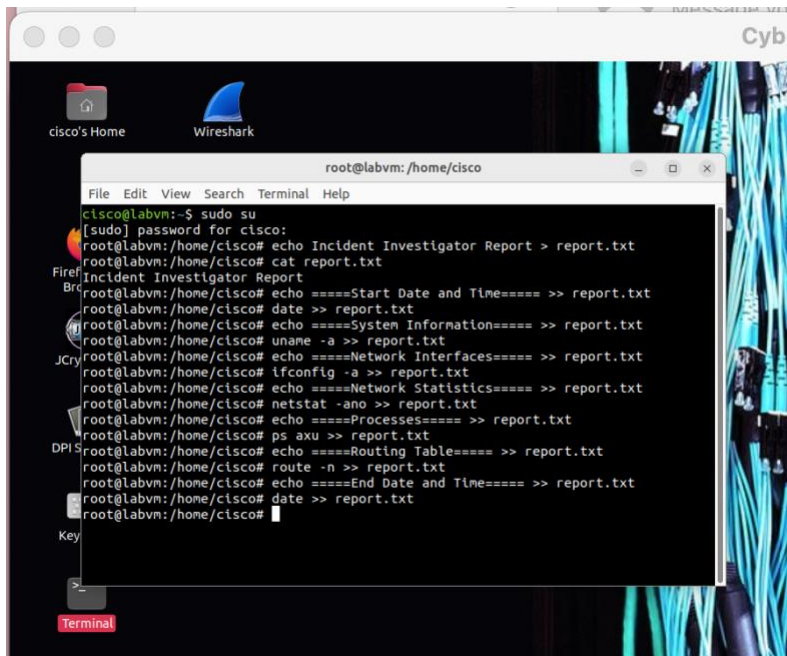

- j. Use the **cat** command and pipe the output to the **less** command to view **report.txt** one page or line at a time. Press the **spacebar** to scroll down by page or press **Enter** to scroll down by a single line. Type **q** when finished.

```
root@labvm:/home/cisco# cat report.txt | less
Incident Investigator Report
=====Start Date and Time=====
Wed 24 Mar 2021 05:06:53 PM UTC
=====System Information=====
```

Linux labvm 5.4.0-67-generic #75-Ubuntu SMP Fri Feb 19 18:03:38 UTC 2021 x86\_64 x86\_64  
x86\_64 GNU/Linux

====Network Interfaces====

enp0s3: flags=4163<UP,BROADCAST,RUNNING,MULTICAST> mtu 1500  
inet 10.0.2.15 netmask 255.255.255.0 broadcast 10.0.2.255  
inet6 fe80::a00:27ff:feb5:4bb0 prefixlen 64 scopeid 0x20<link>  
ether 08:00:27:b5:4b:b0 txqueuelen 1000 (Ethernet)  
RX packets 47719 bytes 36618515 (36.6 MB)  
RX errors 0 dropped 0 overruns 0 frame 0  
TX packets 31406 bytes 3590109 (3.5 MB)  
TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0

lo: flags=73<UP,LOOPBACK,RUNNING> mtu 65536  
inet 127.0.0.1 netmask 255.0.0.0  
inet6 ::1 prefixlen 128 scopeid 0x10<host>  
loop txqueuelen 1000 (Local Loopback)  
RX packets 2292 bytes 244651 (244.6 KB)  
RX errors 0 dropped 0 overruns 0 frame 0  
TX packets 2292 bytes 244651 (244.6 KB)  
TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0

====Network Statistics====

Active Internet connections (servers and established)

<output omitted>

unix	3	[ ]	STREAM	CONNECTED	22100
unix	3	[ ]	STREAM	CONNECTED	18249

====Processes====

USER	PID	%CPU	%MEM	VSZ	RSS	TTY	STAT	START	TIME	COMMAND
root	1	0.0	0.5	101896	10768	?	Ss	Mar23	0:03	/sbin/init
root	2	0.0	0.0	0	0	?	S	Mar23	0:00	[kthreadd]
root	3	0.0	0.0	0	0	?	I<	Mar23	0:00	[rcu_gp]
<output omitted>										
root	5319	0.0	0.0	0	0	?	I	16:31	0:00	[kworker/0:2-events]
root	5490	0.0	0.1	11492	3332	pts/1	R+	17:06	0:00	ps axu

====Routing Table====

Kernel IP routing table

Destination	Gateway	Genmask	Flags	Metric	Ref	Use	Iface
0.0.0.0	10.0.2.2	0.0.0.0	UG	100	0	0	enp0s3
10.0.2.0	0.0.0.0	255.255.255.0	U	0	0	0	enp0s3
10.0.2.2	0.0.0.0	255.255.255.255	UH	100	0	0	enp0s3


====End Date and Time====

Wed 24 Mar 2021 05:06:53 PM UTC

(END) q

root@labvm:/home/cisco#



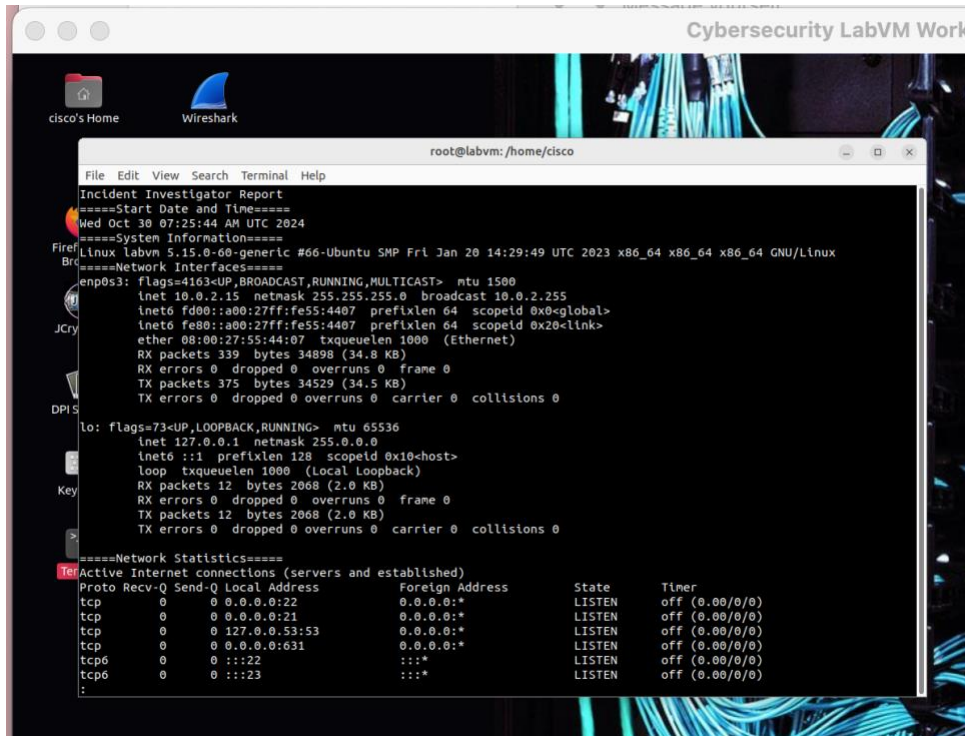

### Step 3: Analyze different log files and learn their importance.

In addition to capturing information stored in RAM, the system also maintains a variety of logs that you should review after an incident. These log files can also be appended to your **report.txt** file or stored separately off the system in the event the system needs to be wiped. Logs of particular interest include, but are not limited to, the following:

- **auth.log** - logs system authorization information
  - **btmpt.log** - logs failed login attempts
  - **wtmp.log** - logs who is currently logged into the system
- a. Use the **cat** command to view the **auth.log** and pipe it to the **less** command. Press the **spacebar** to scroll down by page or press **Enter** to scroll down by a single line. Type **q** when finished. Your output will be different.

```

root@labvm:/home/cisco# cat /var/log/auth.log | less
Mar 18 21:43:57 labvm sshd[375]: Server listening on 0.0.0.0 port 22.
Mar 18 21:43:57 labvm sshd[375]: Server listening on :: port 22.
Mar 18 21:43:57 labvm systemd-logind[366]: New seat seat0.
Mar 18 21:43:57 labvm systemd-logind[366]: Watching system buttons on
/dev/input/event0 (Power Button)
Mar 18 21:43:57 labvm systemd-logind[366]: Watching system buttons on
/dev/input/event1 (Sleep Button)
Mar 18 21:43:57 labvm systemd-logind[366]: Watching system buttons on
/dev/input/event2 (AT Translated Set 2 keyboard)
Mar 18 21:43:59 labvm sshd[408]: error: kex_exchange_identification: Connection closed
by remote host
Mar 18 21:43:59 labvm sshd[407]: Accepted password for cisco from 10.0.2.2 port 57067
ssh2

```




```
Mar 18 21:43:59 labvm sshd[407]: pam_unix(sshd:session): session opened for user cisco by (uid=0)
```

```
Mar 18 21:43:59 labvm systemd-logind[366]: New session 1 of user cisco.
```

<output omitted>

(END) **q**

```
root@labvm:/home/cisco#
```

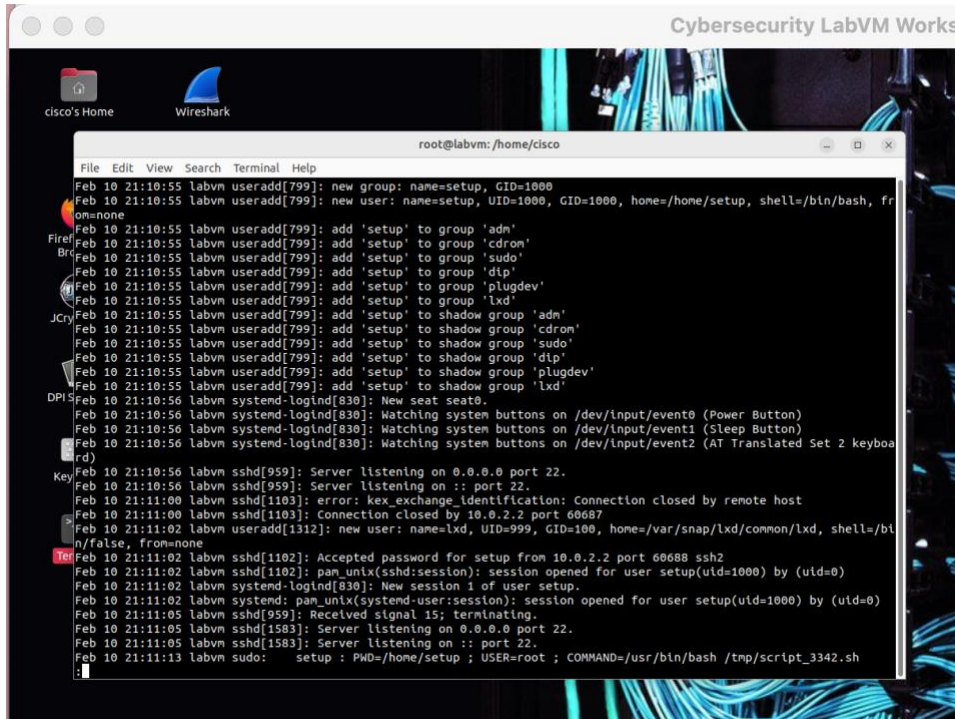


- b. The **last** command shows a listing of last logged in users. Enter the command with the **-f** option to specify the log file. The **btmp** log file shows failed login attempts. Your output will be different.

```
root@labvm:/home/cisco# last -f /var/log/btmp
```

```
UNKNOWN    tty6          Thu Mar 18 21:47      gone - no logout
UNKNOWN    tty4          Thu Mar 18 21:47      gone - no logout
UNKNOWN    tty3          Thu Mar 18 21:47      gone - no logout
cisco      tty1          Thu Mar 18 21:47      gone - no logout
cisco      tty1          Thu Mar 18 21:47 - 21:47 (00:00)
```

btmp begins Thu Mar 18 21:47:05 2021


```
root@labvm:/home/cisco#
```

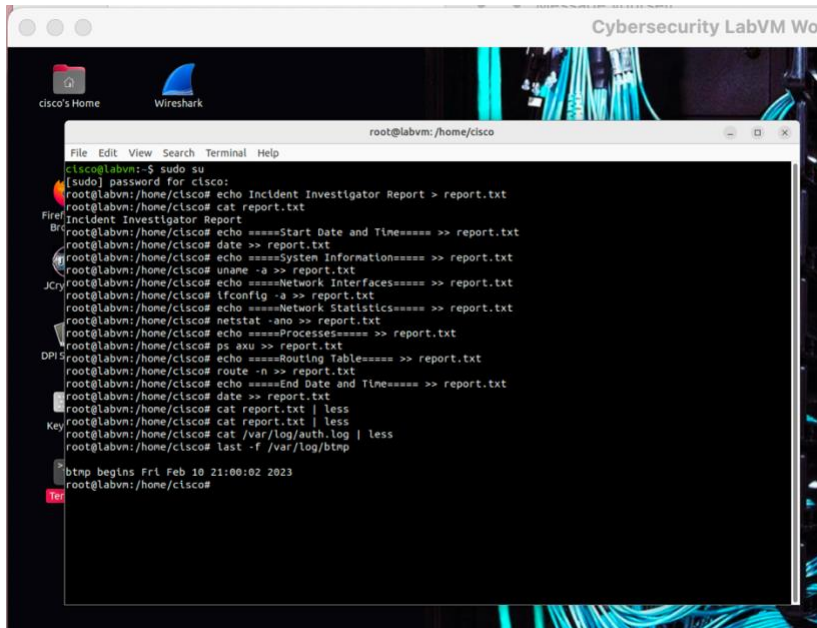

- c. Enter the **last** command again specifying the **wtmp** file to show who is currently connected to the system. Your output will be different.

```
root@labvm:/home/cisco# last -f /var/log/wtmp
cisco    tty7          :0                Tue Mar 23 19:38      gone - no logout
reboot   system boot    5.4.0-67-generic Tue Mar 23 14:38      still running
cisco    tty2          :                Thu Mar 18 21:47 - 21:47 (00:00)
reboot   system boot    5.4.0-67-generic Thu Mar 18 21:43 - 22:02 (00:18)
```


wtmp begins Thu Mar 18 21:43:54 2021

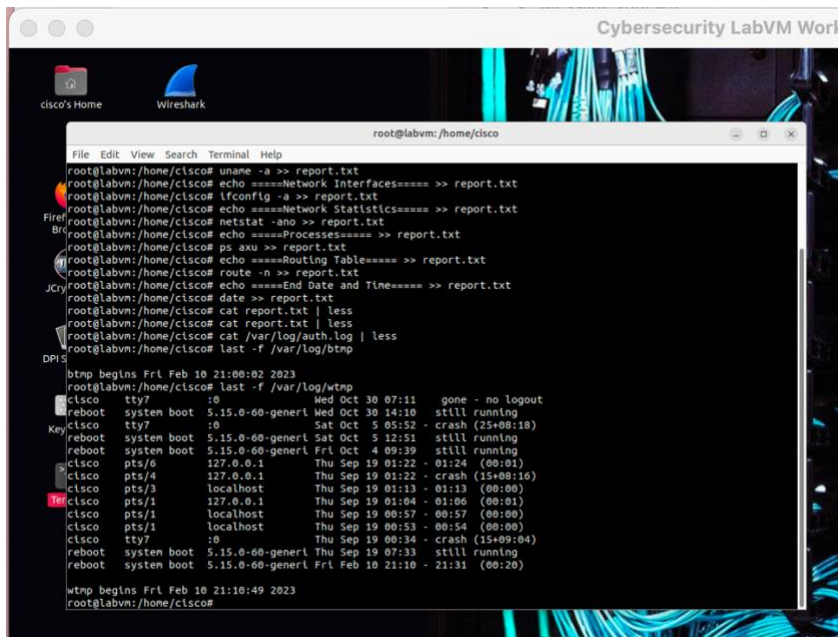

- d. Enter the **exit** command to switch back to the cisco user.

```
root@labvm:/home/cisco# exit
```

```
cisco@labvm:~$
```

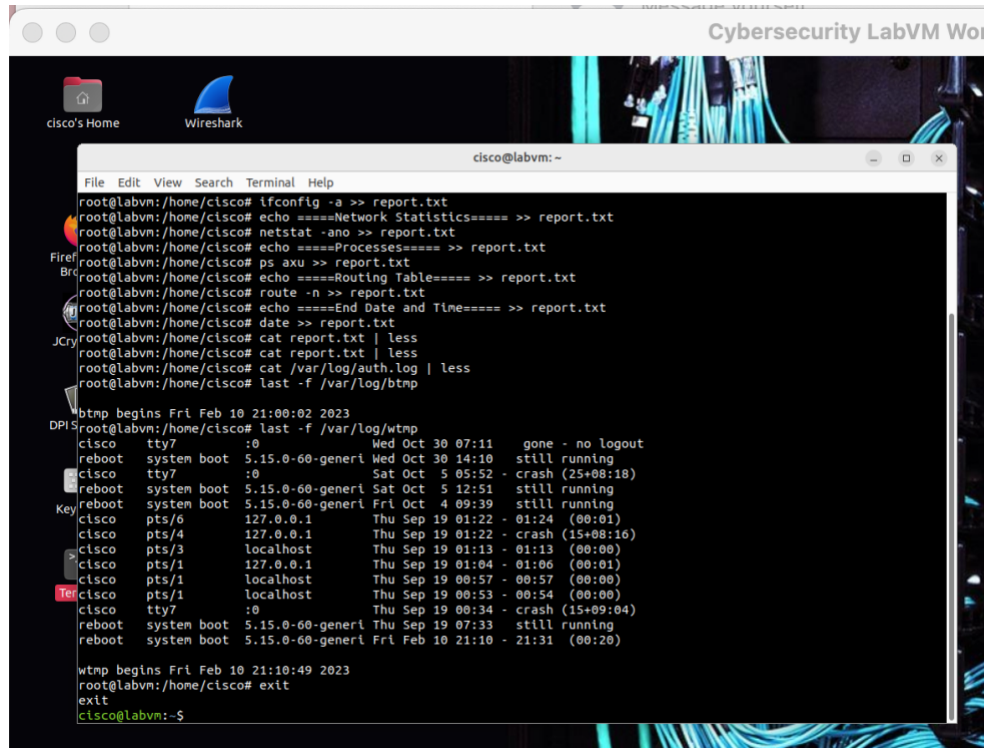

```
cisco@labvm:~$
```