CMP205: Computer Graphics

Lecture 2: Transformations I

Ahmed S. Kaseb
Fall 2018

Slides by: Dr. Mohamed Alaa El-Dien Aly

Agenda

- 2D Transformations
- 3D Transformations
- 2D & 3D Translation

Acknowledgments: Some slides adapted from Steve Marschner and Fredo Durand.

2D Transformations

- Scale
- Shear
- Rotation
- Reflection

Look at *linear* transformations in the form:

$$\underbrace{\begin{bmatrix} x' \\ y' \end{bmatrix}}_{\text{new point}} = \underbrace{\begin{bmatrix} a_{11} & a_{12} \\ a_{21} & a_{22} \end{bmatrix}}_{\text{trans matrix}} \underbrace{\begin{bmatrix} x \\ y \end{bmatrix}}_{\text{old point}} = \underbrace{\begin{bmatrix} a_{11}x + a_{12}y \\ a_{21}x + a_{22}y \end{bmatrix}}_{\text{new point}}$$

Scale

Just “scales” all the points by multiplying them with a scale factor

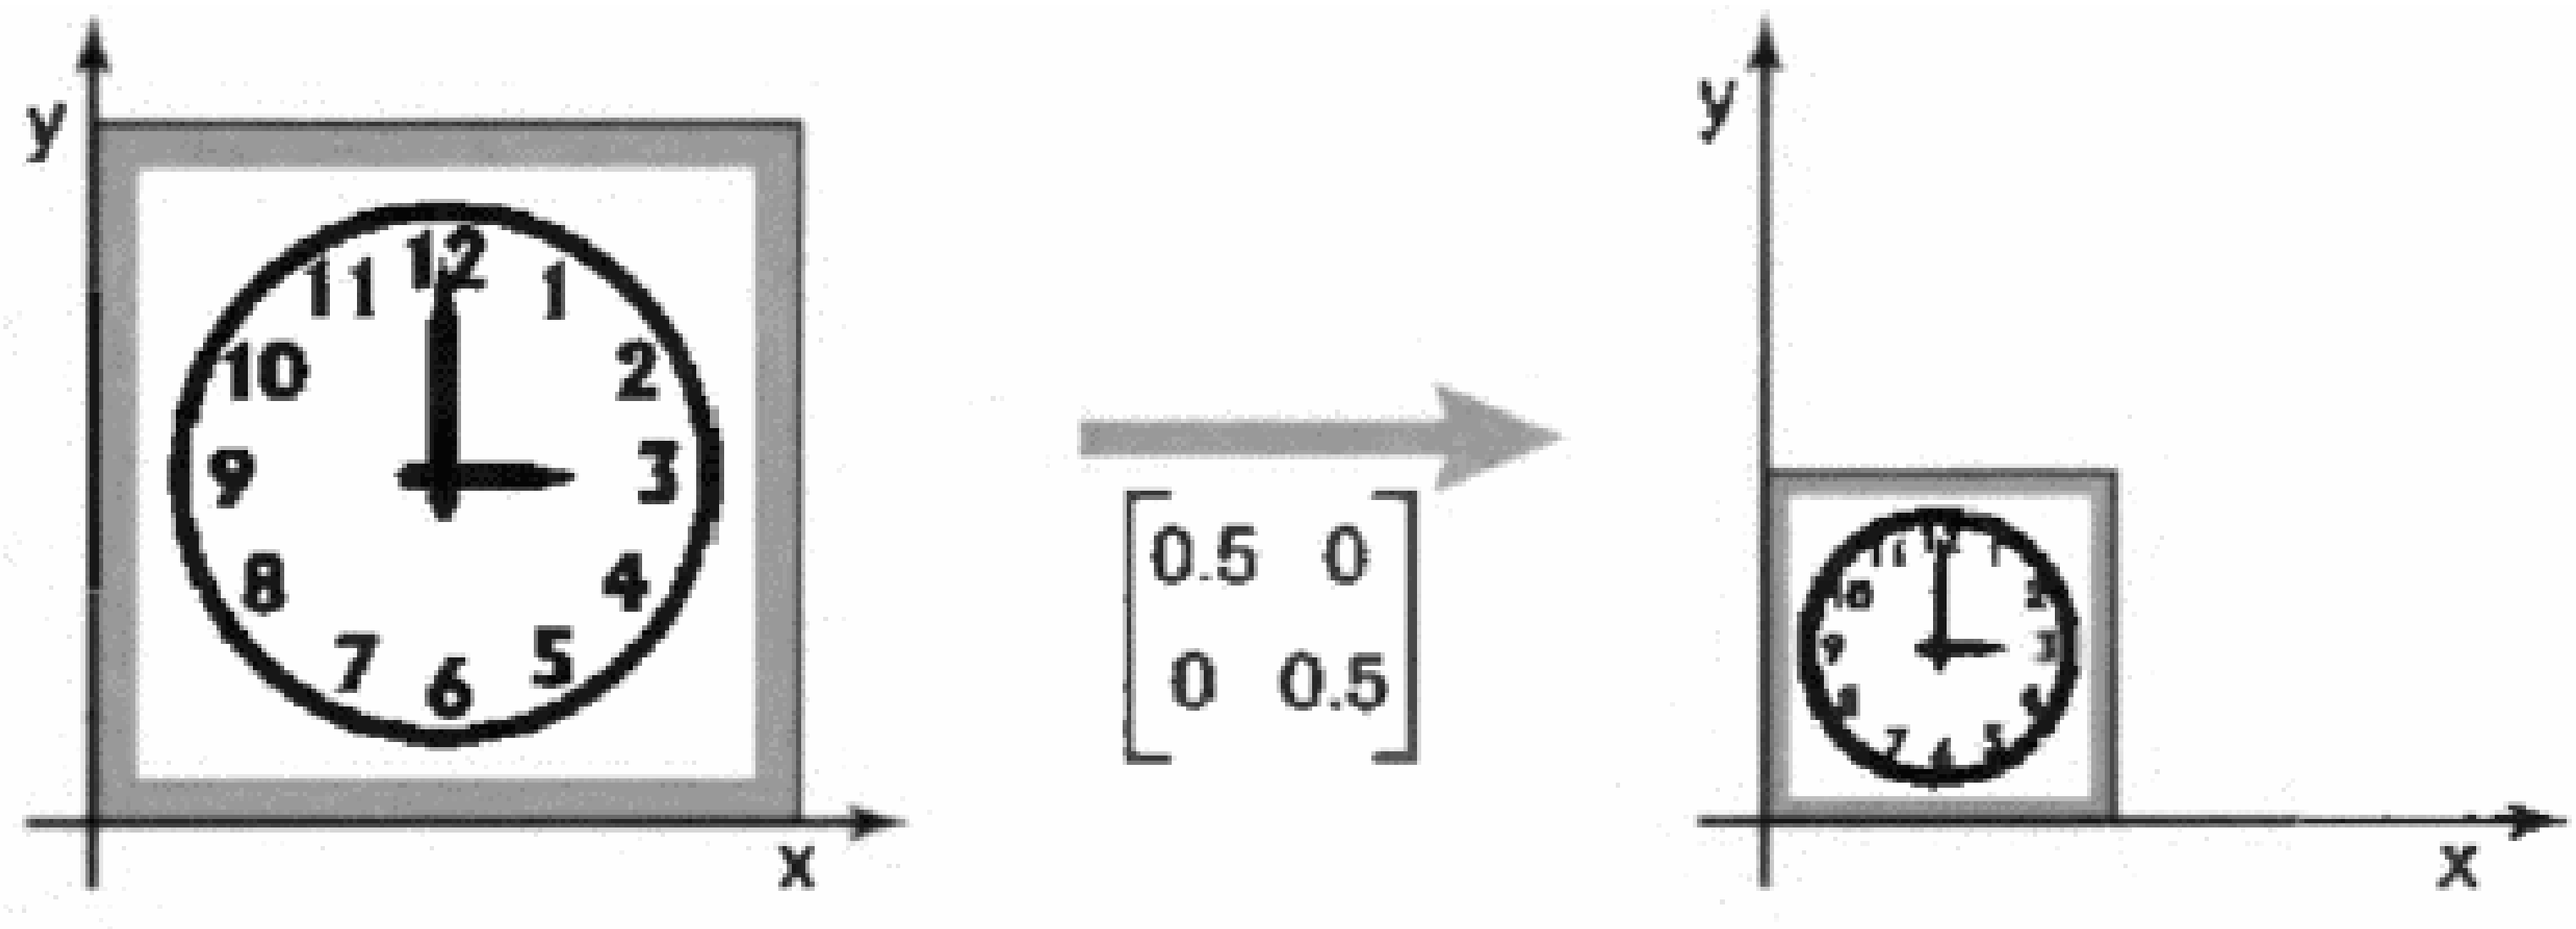

Scale

We can define it by the matrix: $$\text{Scale}(s_x, s_y) = \begin{bmatrix} s_x & 0 \\ 0 & s_y \end{bmatrix}$$

$$\begin{bmatrix} x' \\ y' \end{bmatrix} = \begin{bmatrix} s_x & 0 \\ 0 & s_y \end{bmatrix} \begin{bmatrix} x \\ y \end{bmatrix} = \begin{bmatrix} s_x x \\ s_y y \end{bmatrix}$$

Scale

- Uniform Scale: equal factors in *x* and *y* directions

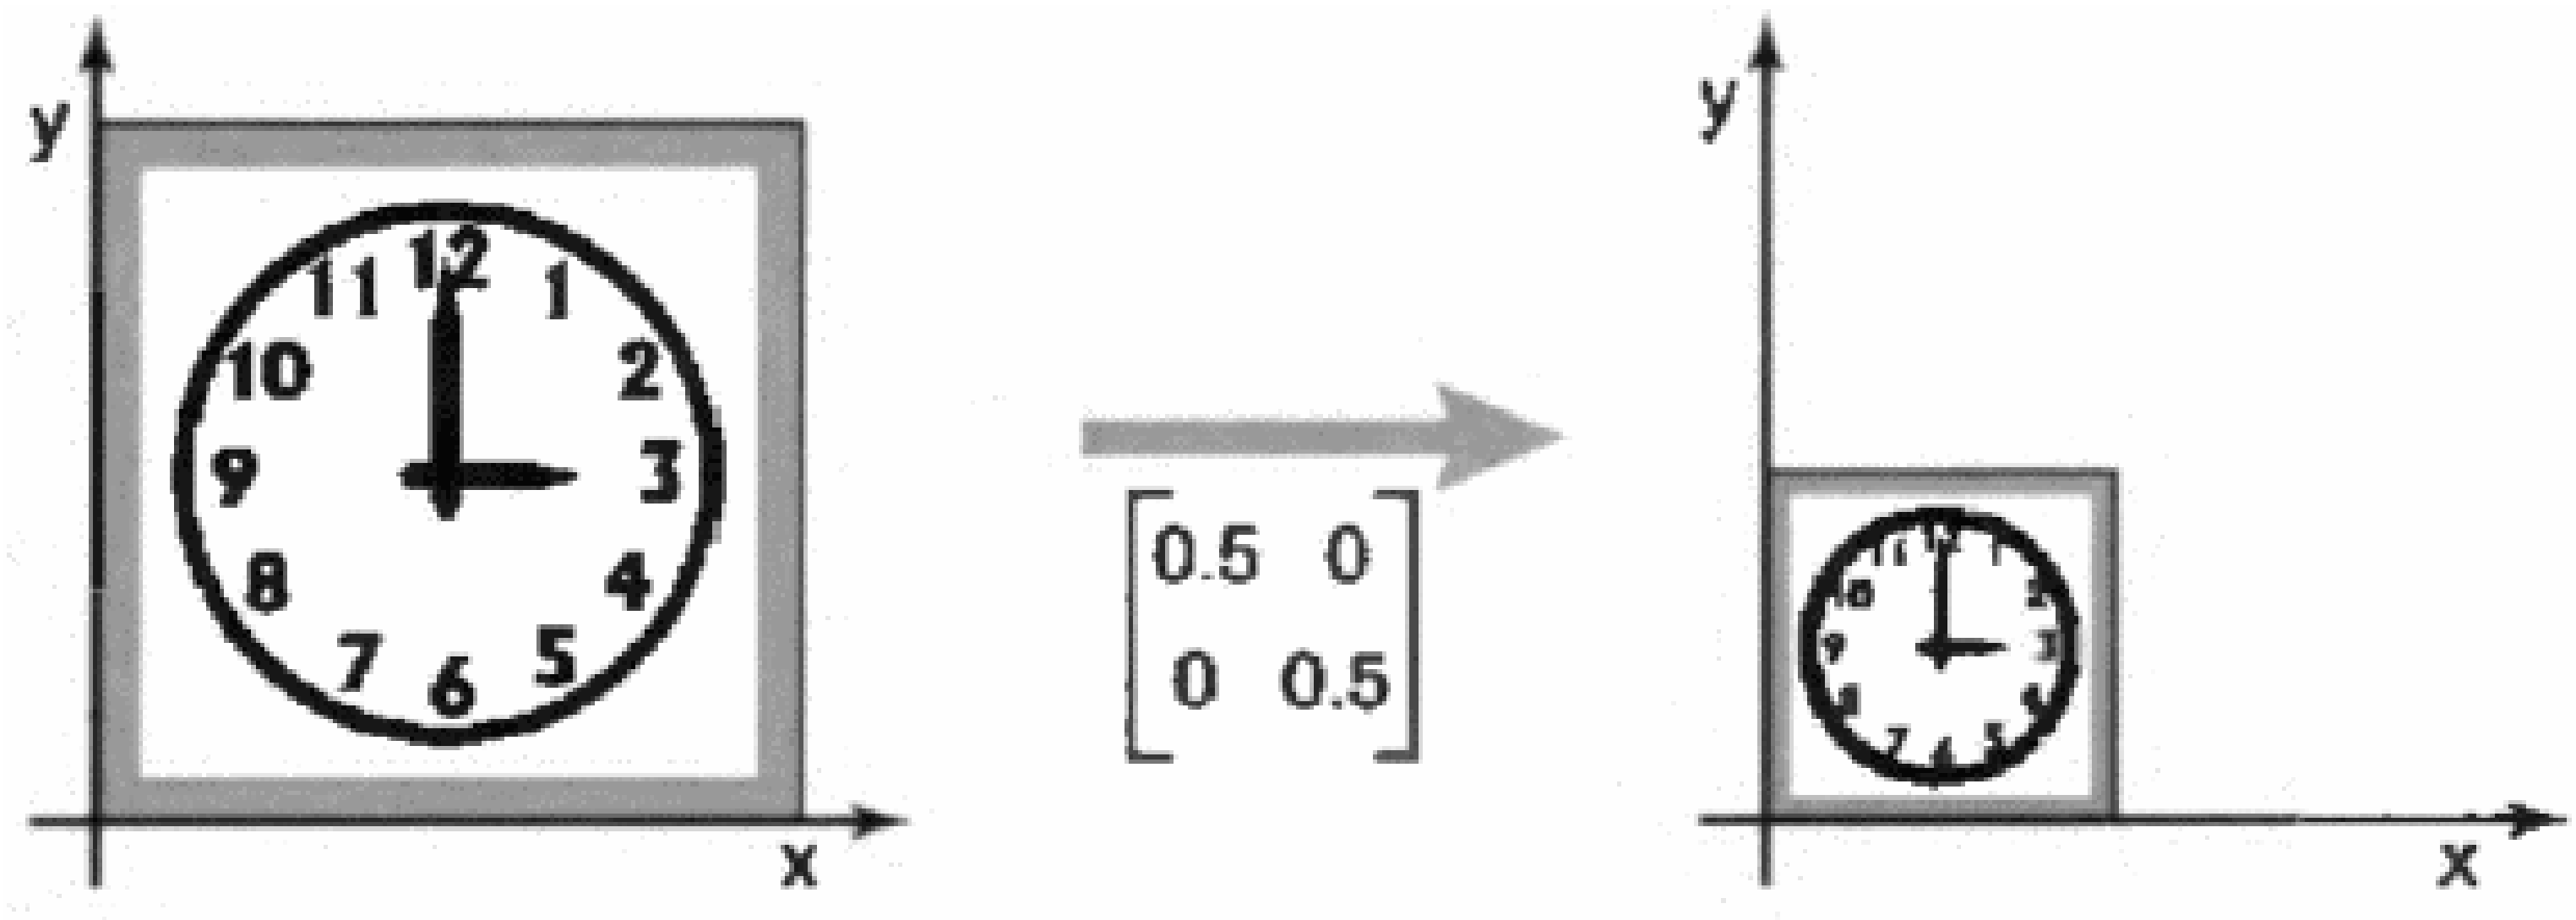

Scale

- Nonuniform Scale: different factors in *x* and *y* directions

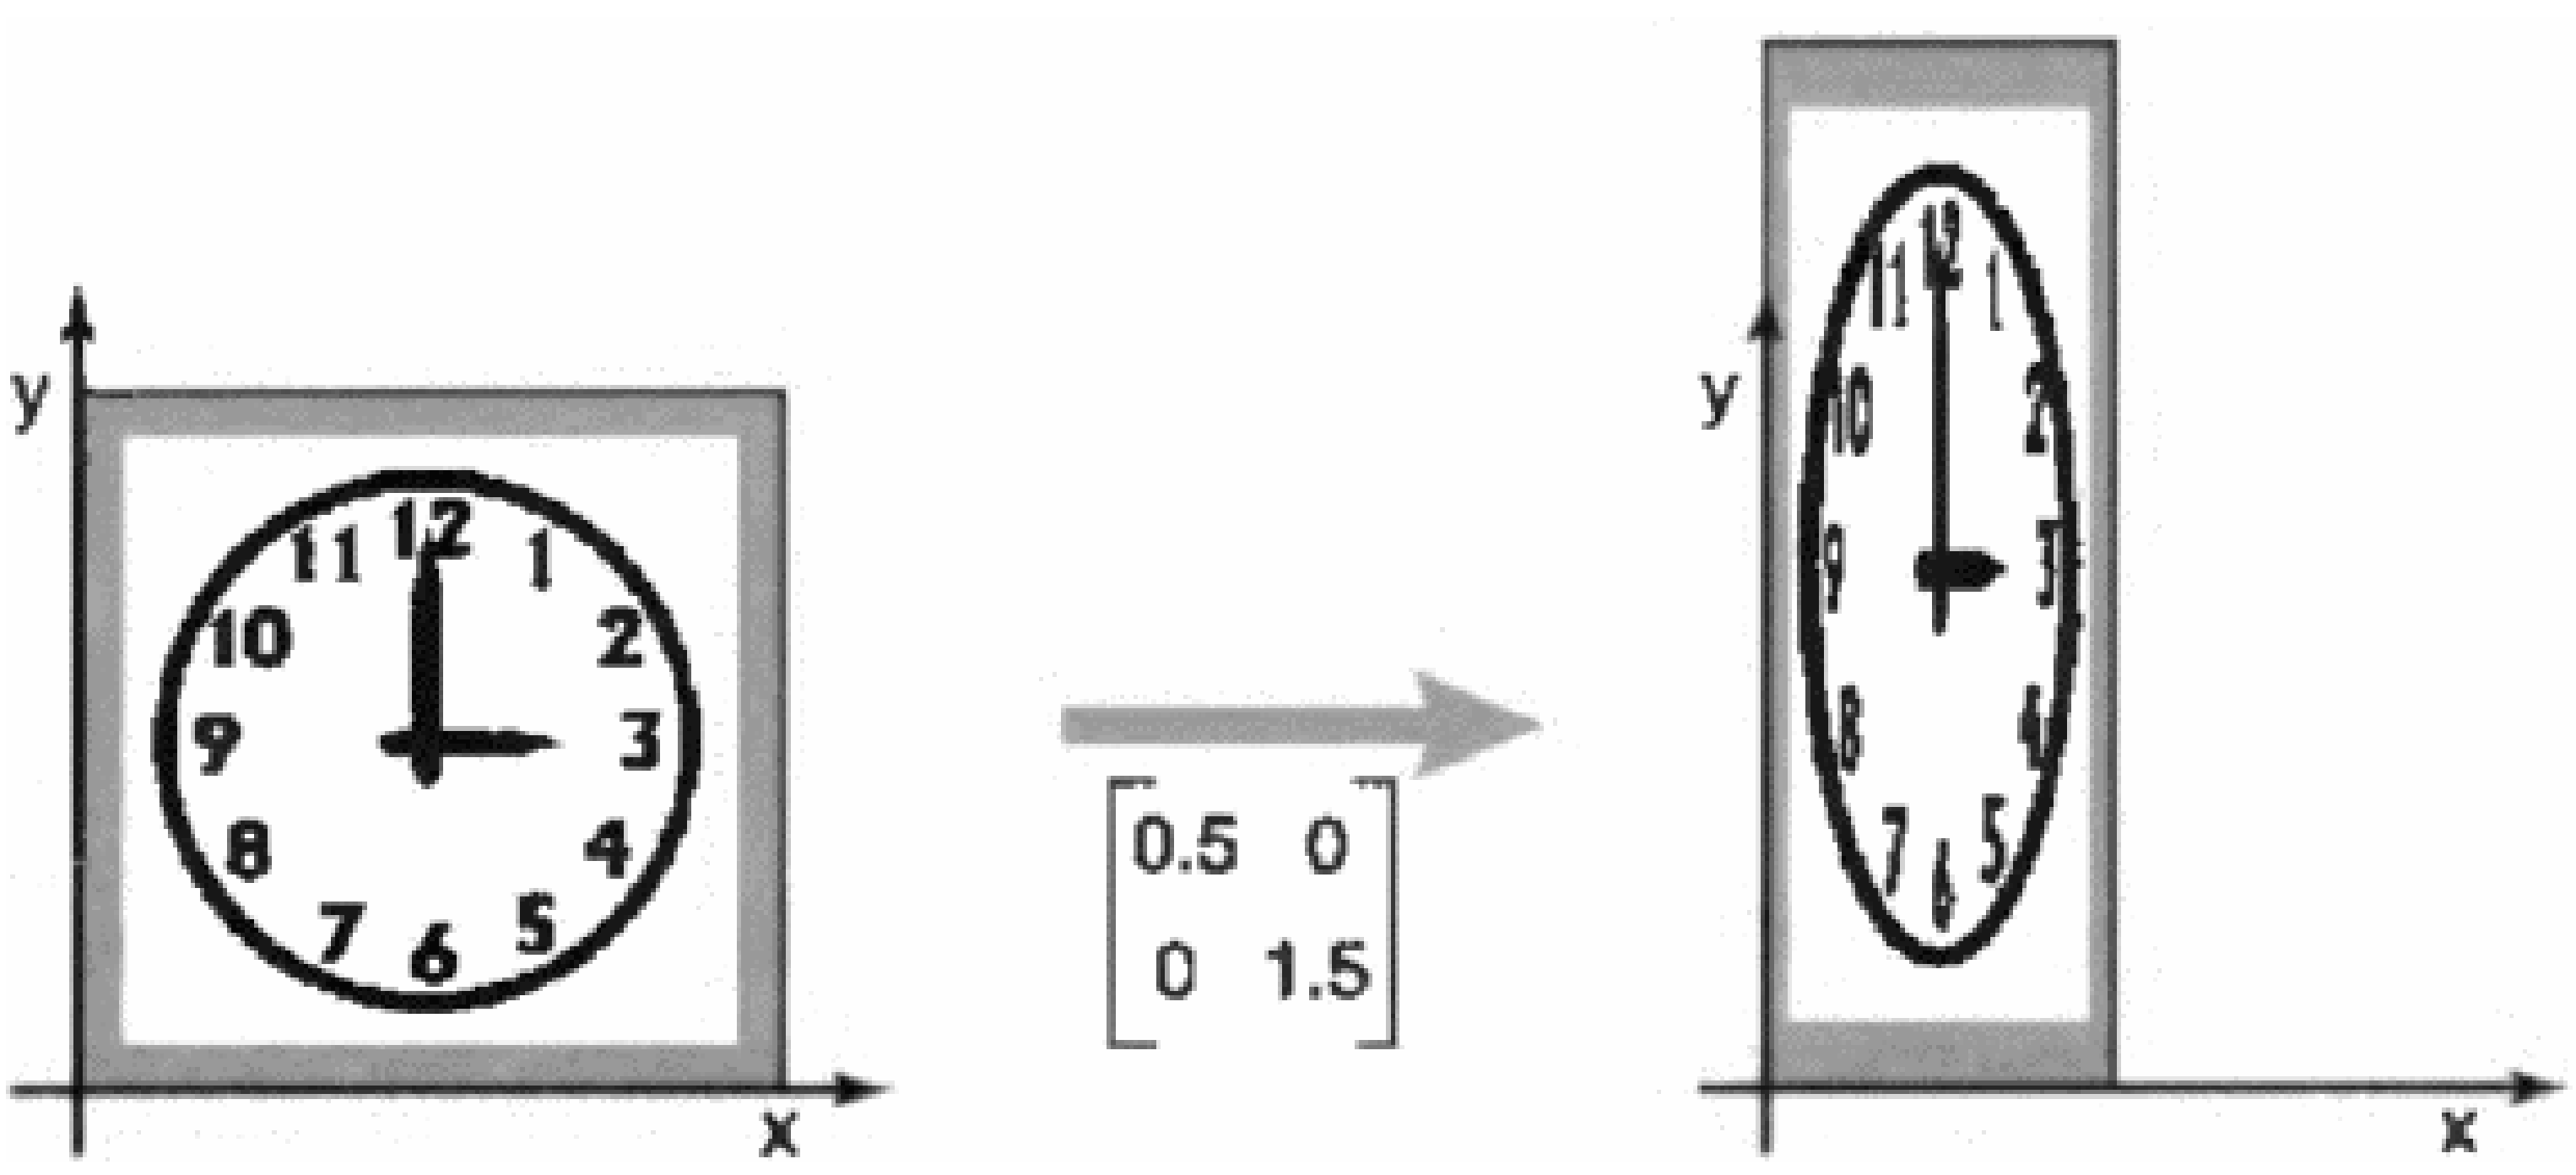

Shearing

Shears the points by stretching along one direction

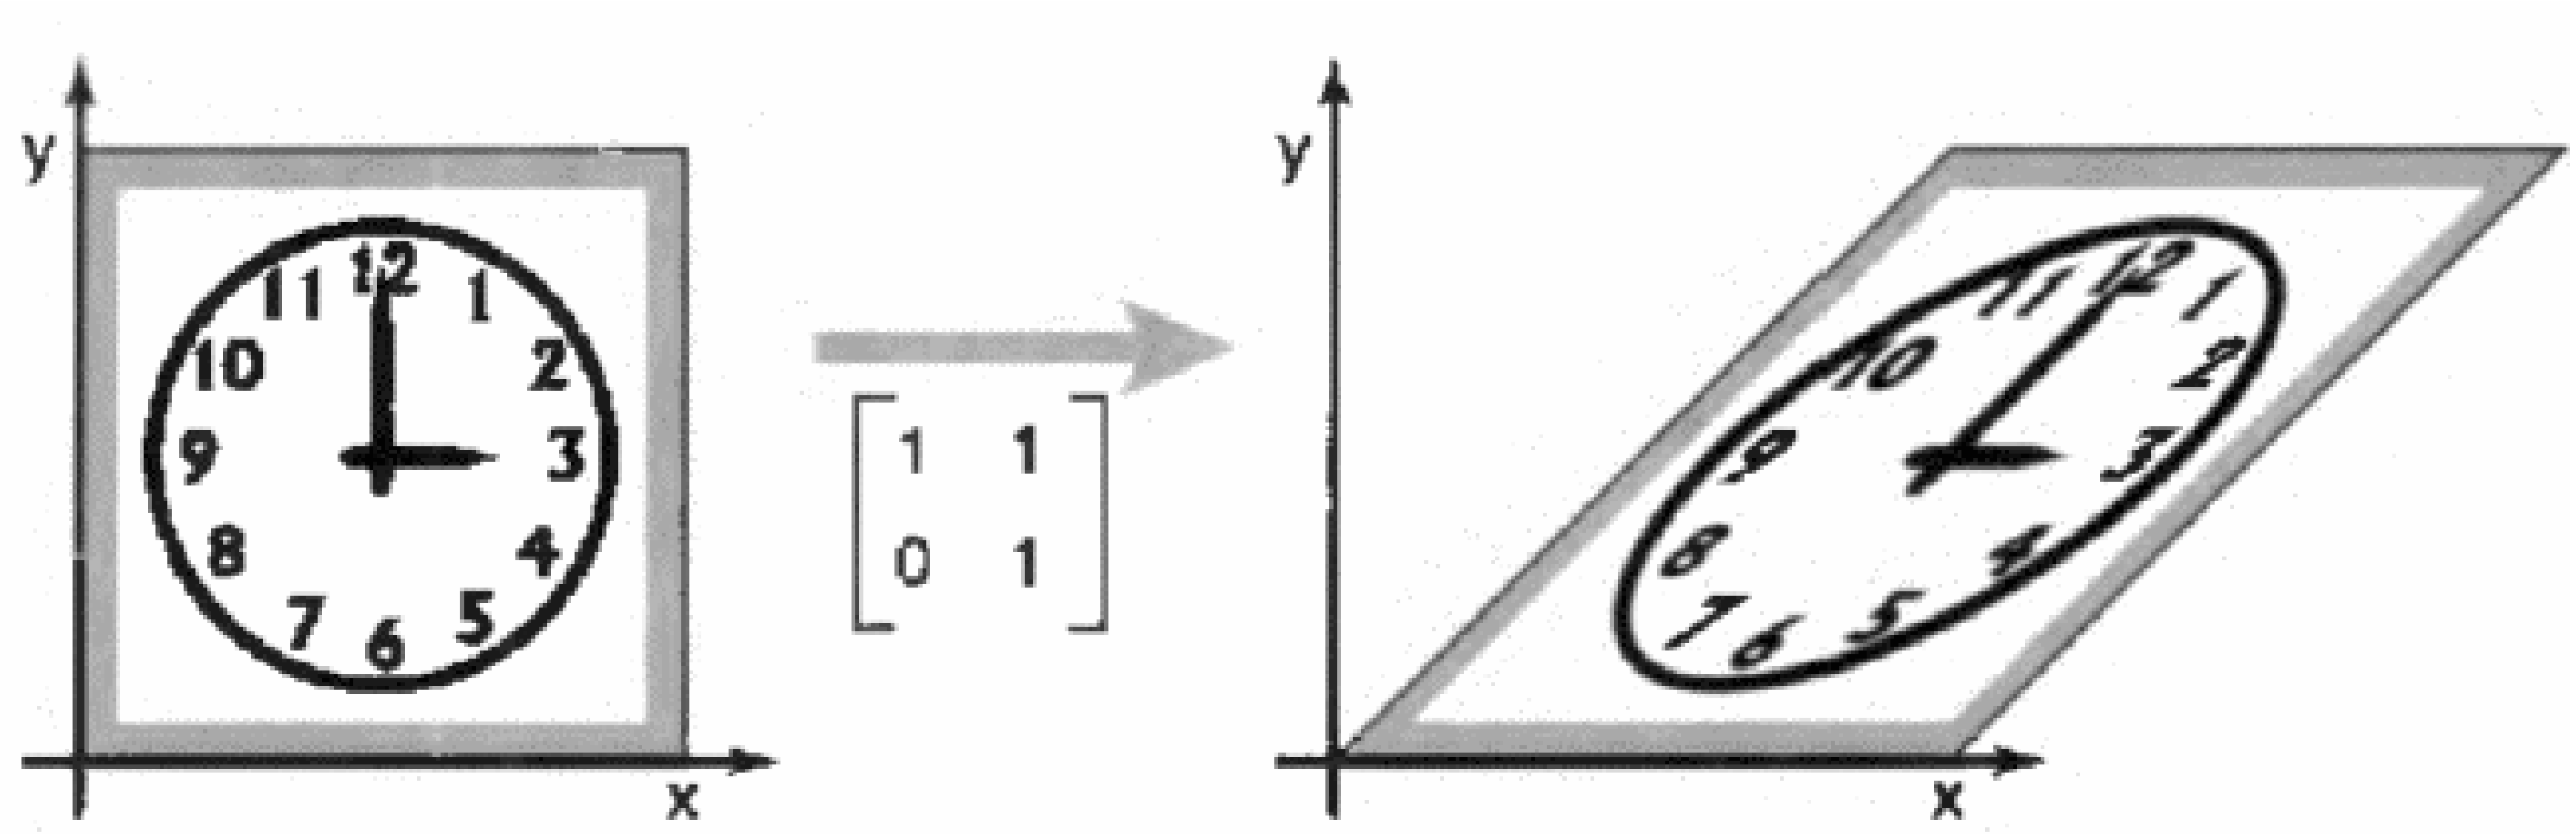

Shearing

$$\text{shear-x}(s) = \begin{bmatrix} 1 & s \\ 0 & 1 \end{bmatrix}$$

$$\begin{bmatrix} x' \\ y' \end{bmatrix} = \begin{bmatrix} 1 & s \\ 0 & 1 \end{bmatrix} \begin{bmatrix} x \\ y \end{bmatrix} = \begin{bmatrix} x + sy \\ y \end{bmatrix}$$

$$\text{shear-y}(s) = \begin{bmatrix} 1 & 0 \\ s & 1 \end{bmatrix}$$

Shearing

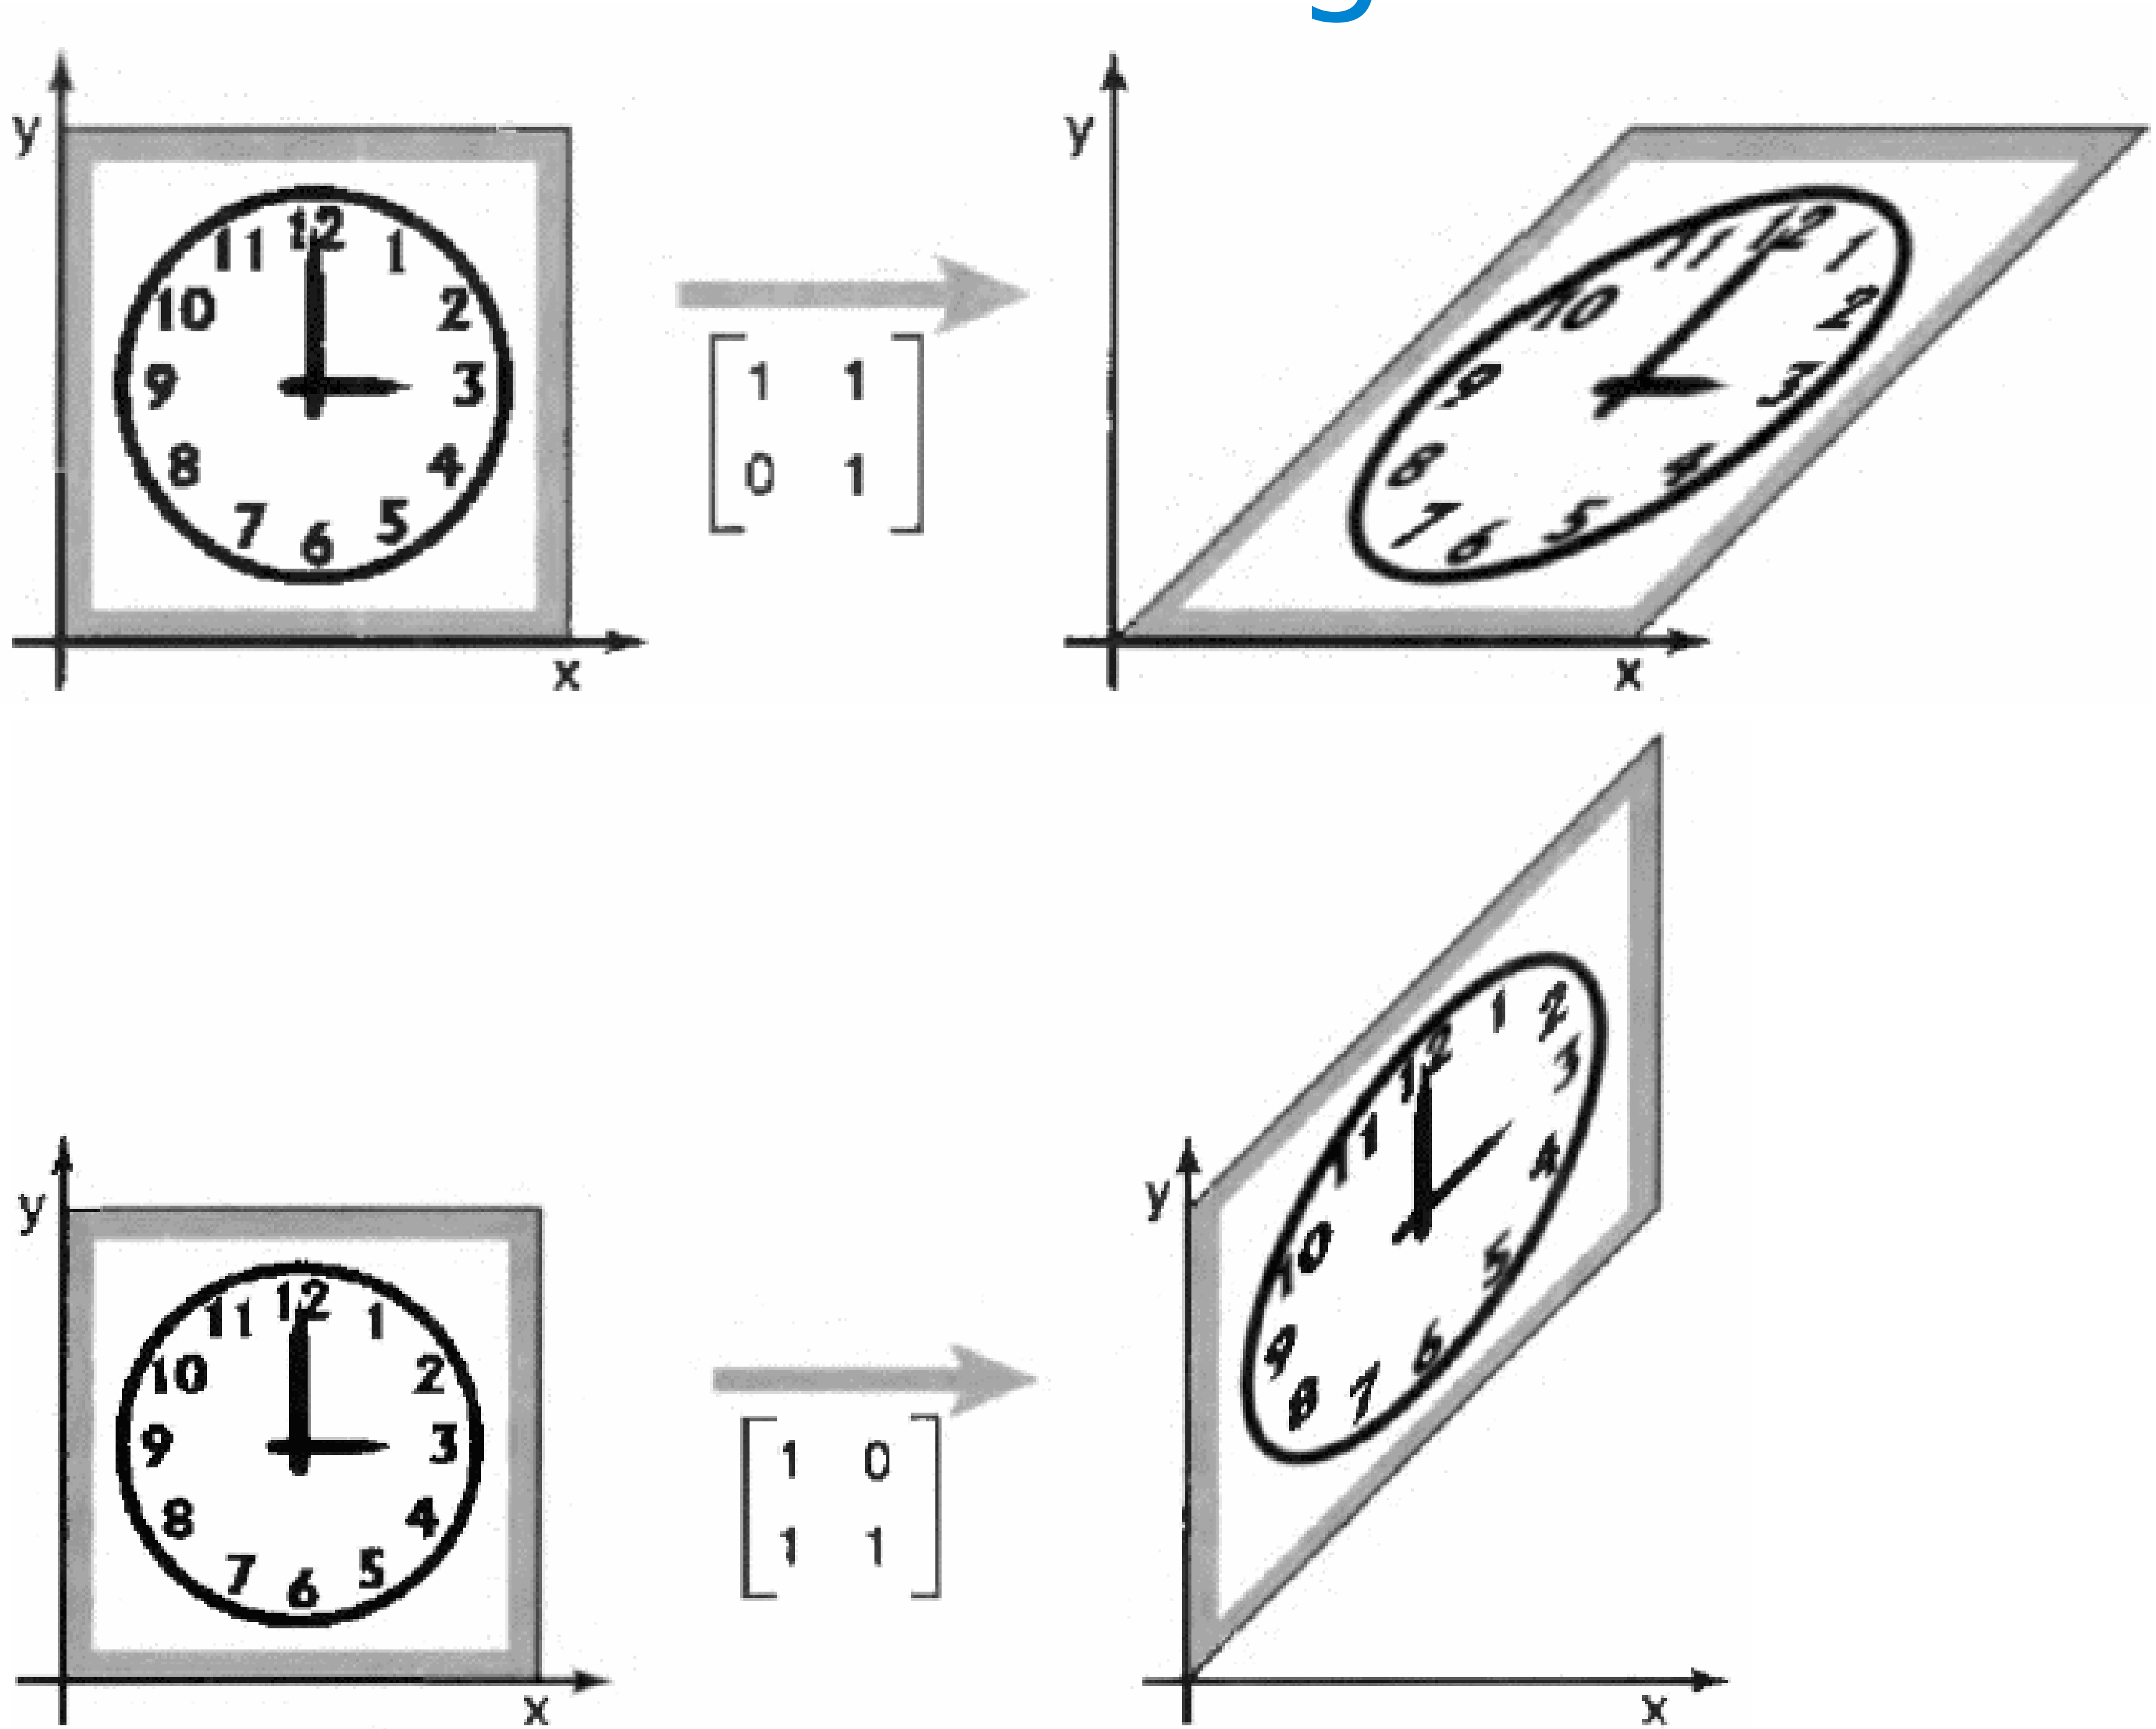

y
x
$\begin{bmatrix} 1 & 1 \\ 0 & 1 \end{bmatrix}$
y
x
y
x
$\begin{bmatrix} 1 & 0 \\ 1 & 1 \end{bmatrix}$
y
x

Rotation

Rotate all the points around the origin

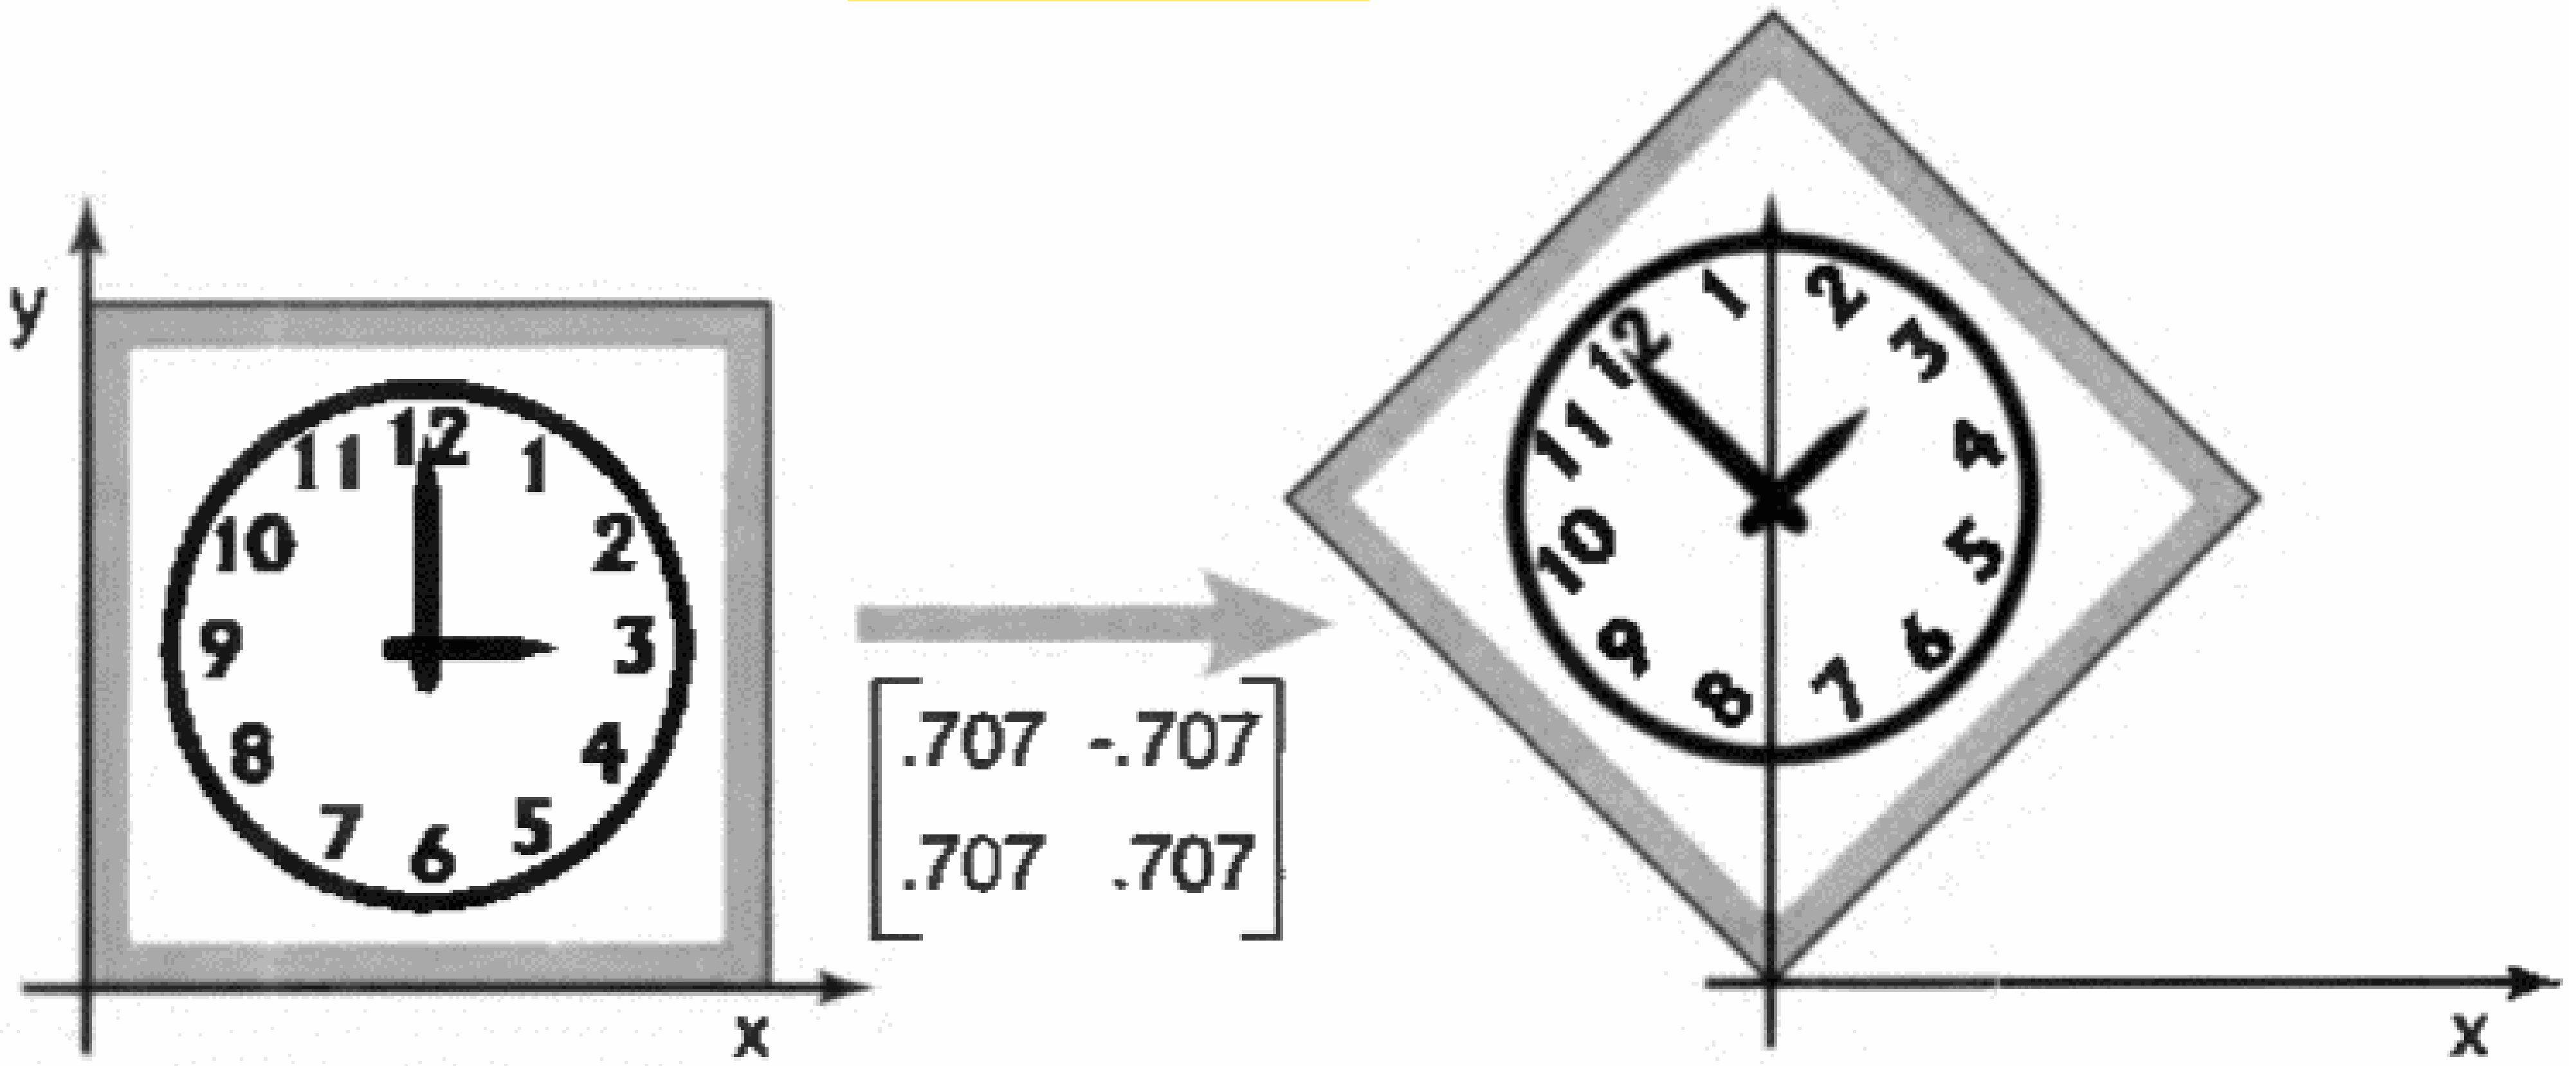

Rotation

$$x_a = r\cos\alpha$$
$$y_a = r\sin\alpha$$

$$x_b = r\cos(\alpha + \phi)$$
$$y_b = r\sin(\alpha + \phi)$$

b is the new position

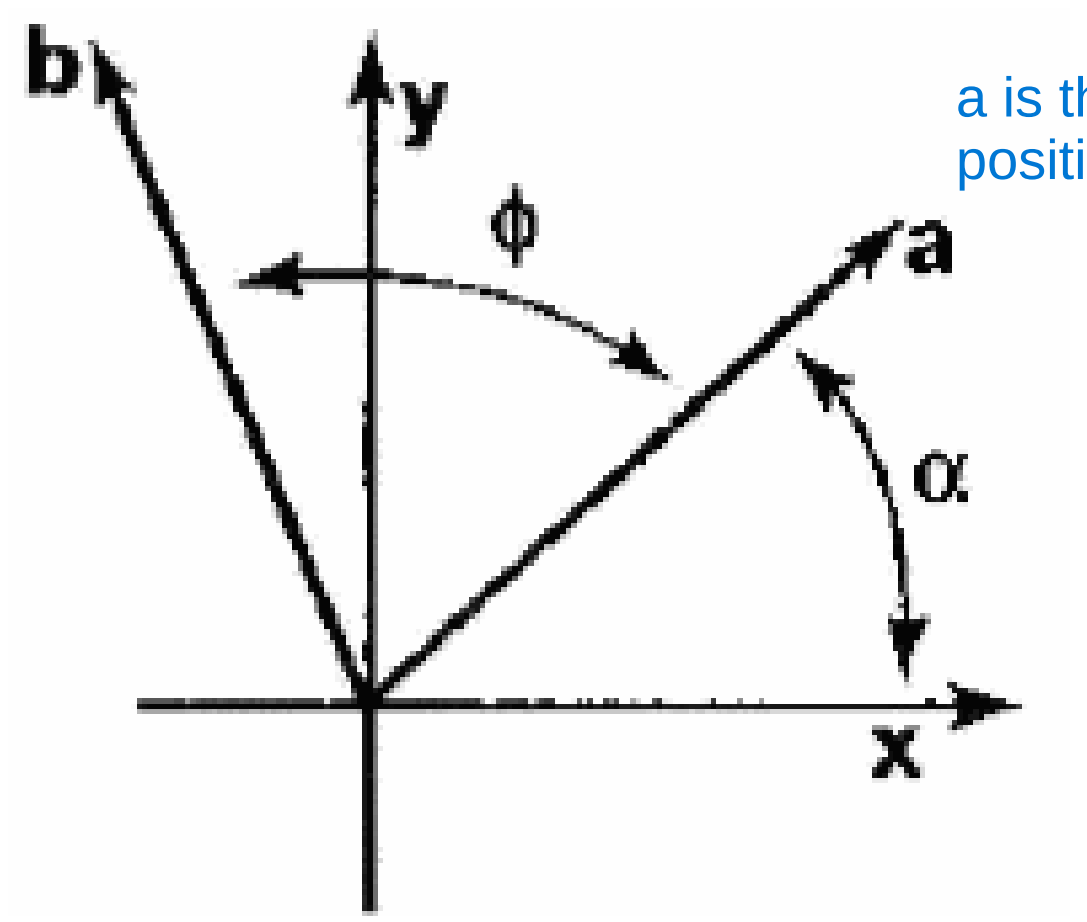

a is the old position

and we know that:

$$\cos(\alpha + \phi) = \cos\alpha\cos\phi - \sin\alpha\sin\phi$$
$$\sin(\alpha + \phi) = \cos\alpha\sin\phi + \sin\alpha\cos\phi$$

$$x_b = x_a\cos\phi - y_a\sin\phi$$
$$y_b = x_a\sin\phi + y_a\cos\phi$$

Rotation

de gt mn el equation el fo2 -> xa cos - ya sin -> this is the upper row
-> xa sin - y cos -> this is the lower row

$$rotate(\phi) = \begin{bmatrix} \cos\phi & -\sin\phi \\ \sin\phi & \cos\phi \end{bmatrix}$$

What's the important property of this matrix?

It's orthonormal i.e. $R\,R^T = I$

Rotation

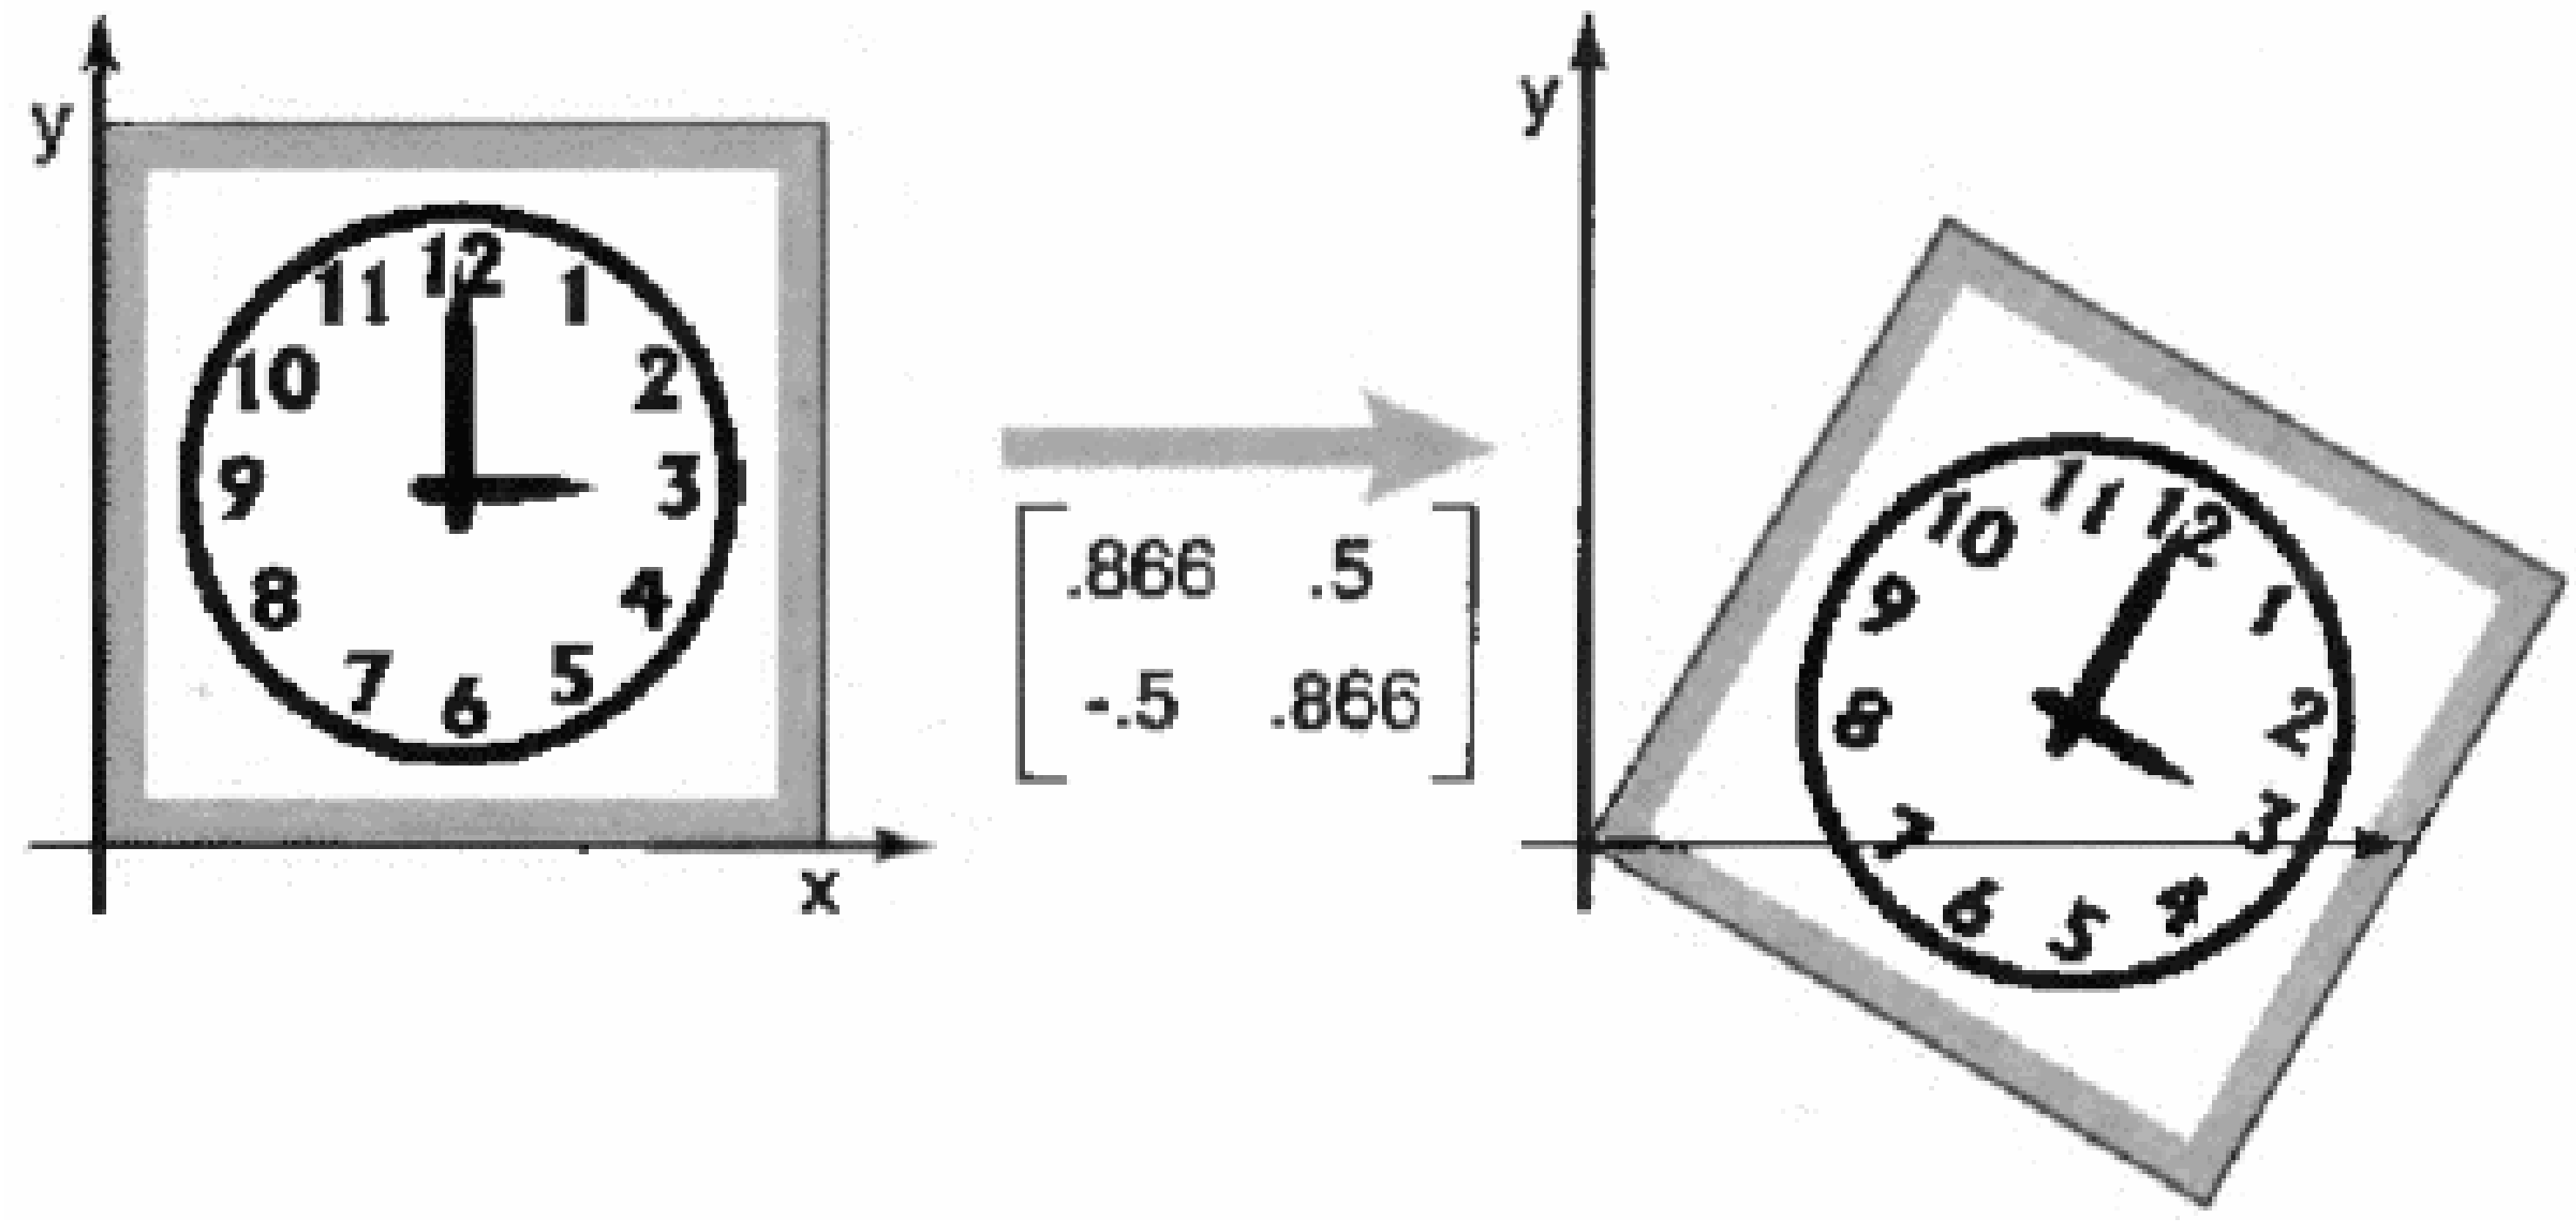

Reflection

Reflects points around some axis

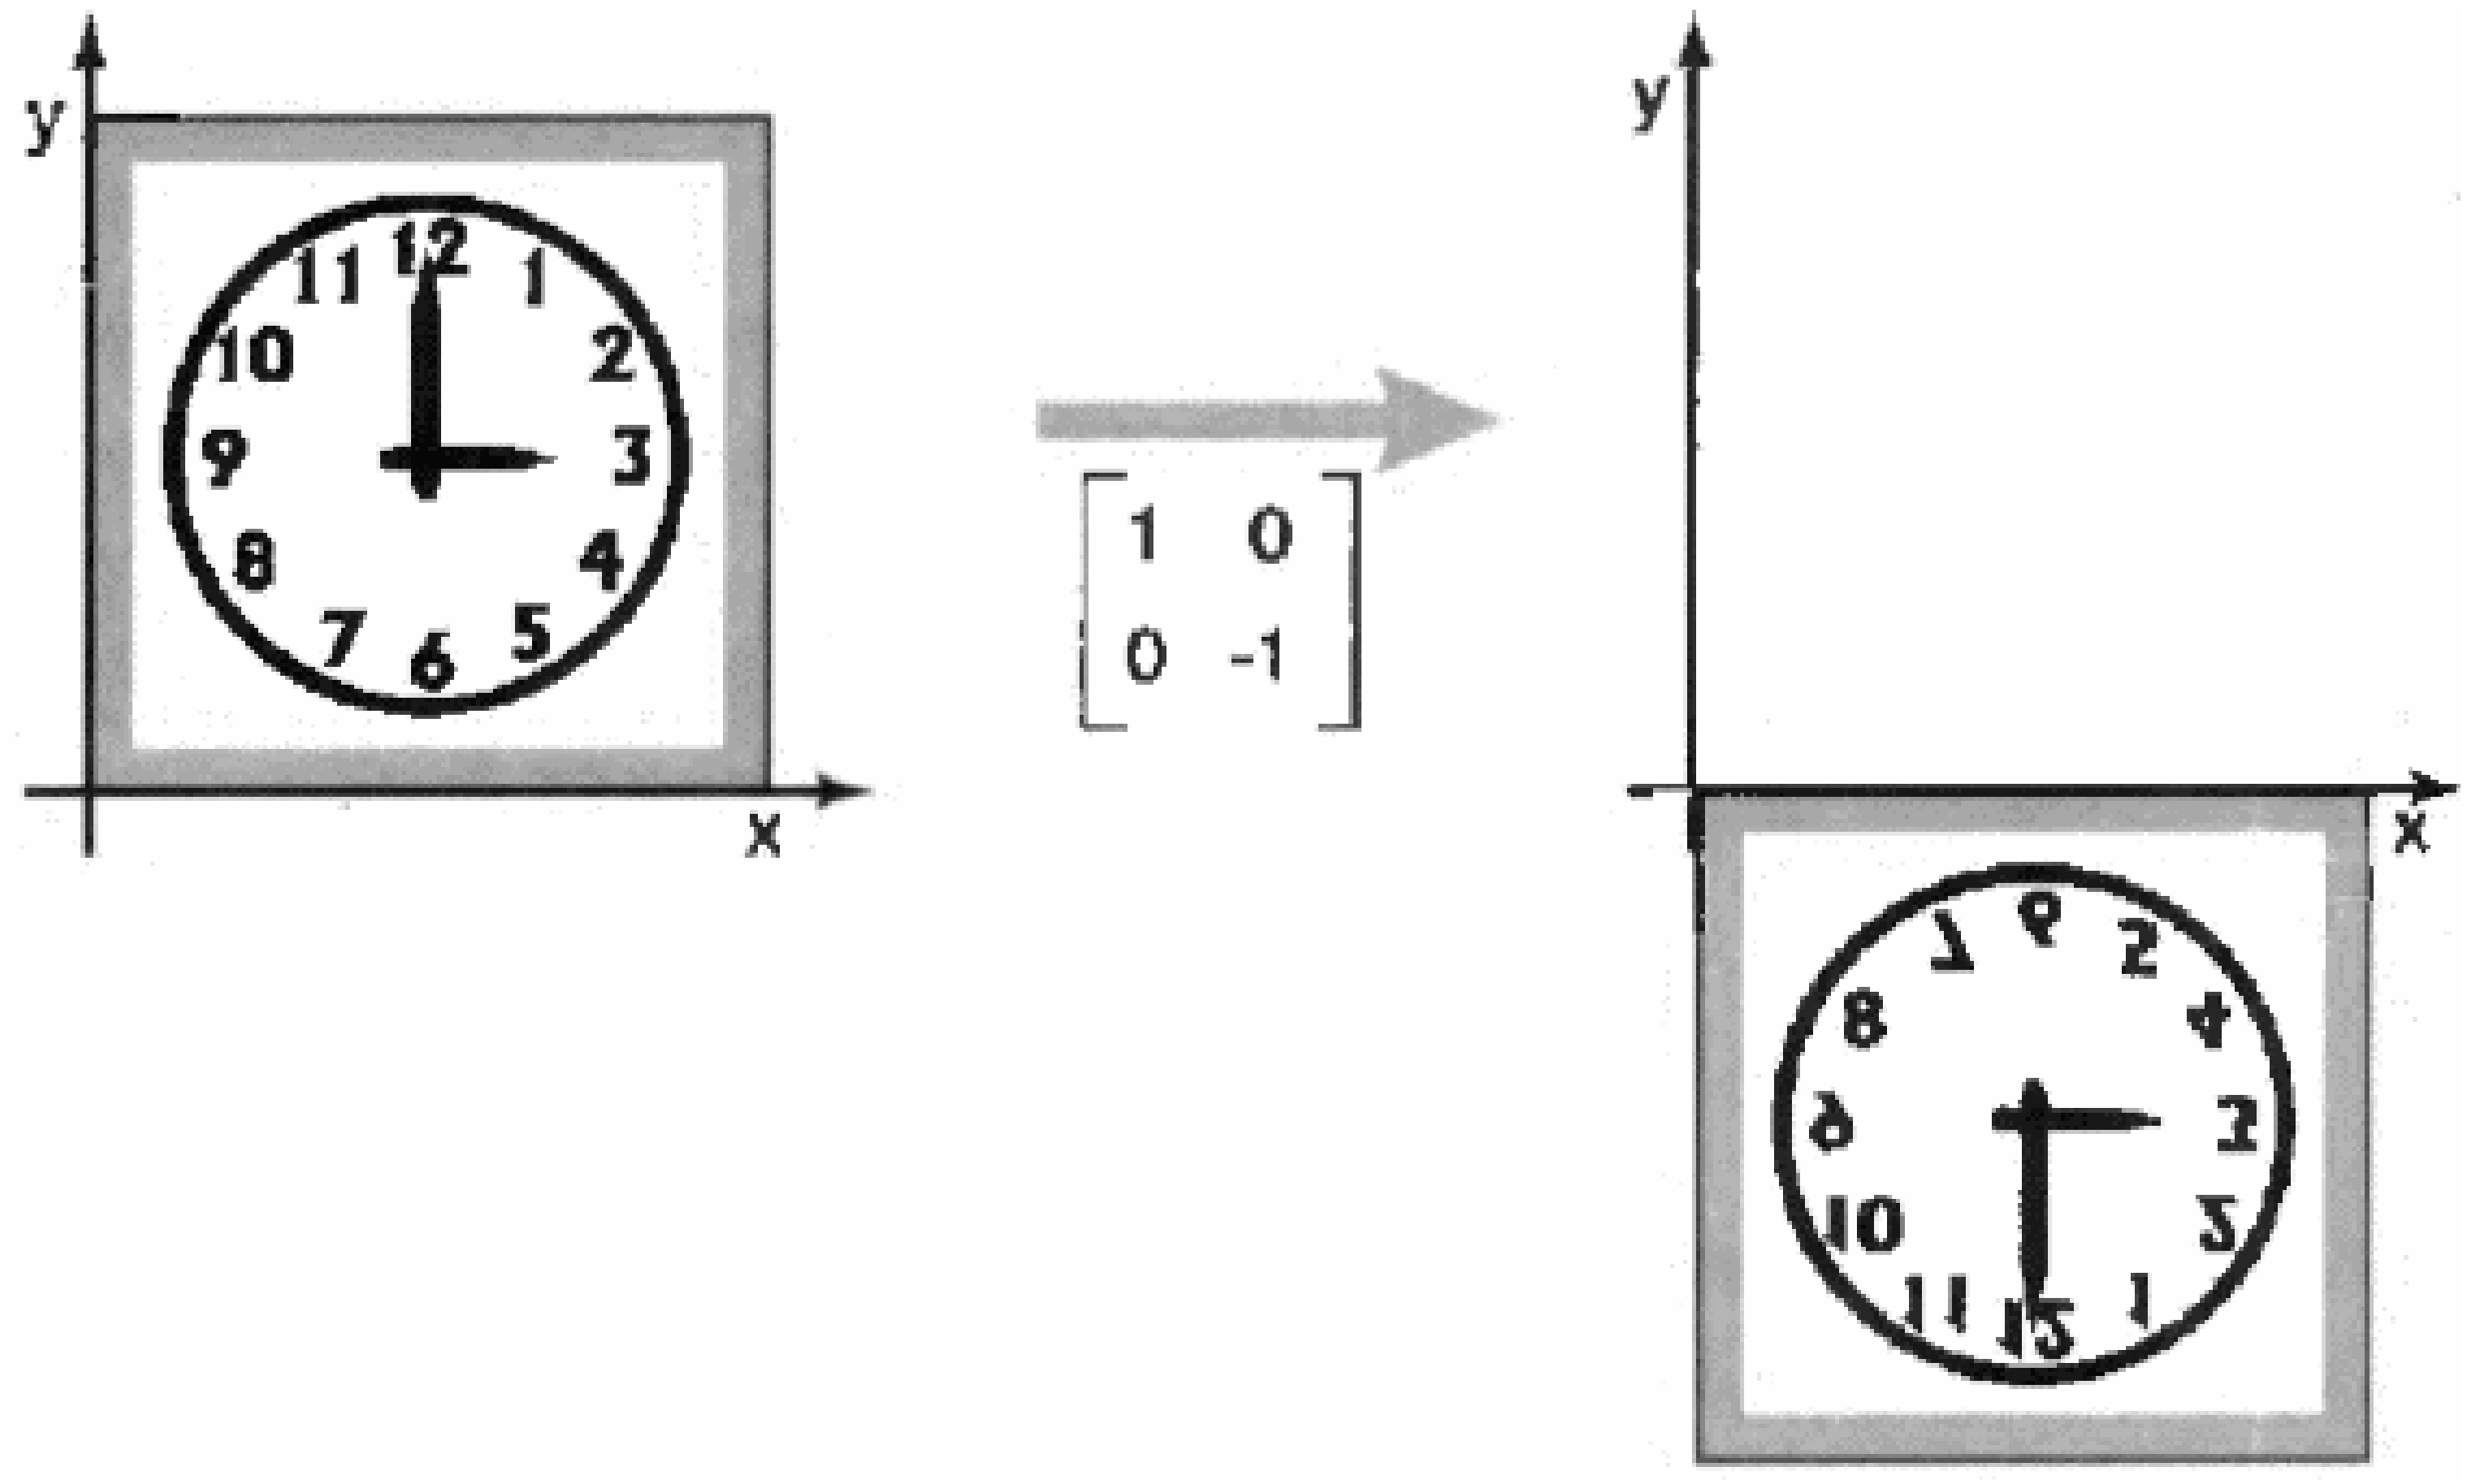

Reflection

$$\text{reflect-x} = \begin{bmatrix} 1 & 0 \\ 0 & -1 \end{bmatrix}$$

$$\begin{bmatrix} x' \\ y' \end{bmatrix} = \begin{bmatrix} 1 & 0 \\ 0 & -1 \end{bmatrix} \begin{bmatrix} x \\ y \end{bmatrix} = \begin{bmatrix} x \\ -y \end{bmatrix}$$

$$\text{reflect-y} = \begin{bmatrix} -1 & 0 \\ 0 & 1 \end{bmatrix}$$

Reflection

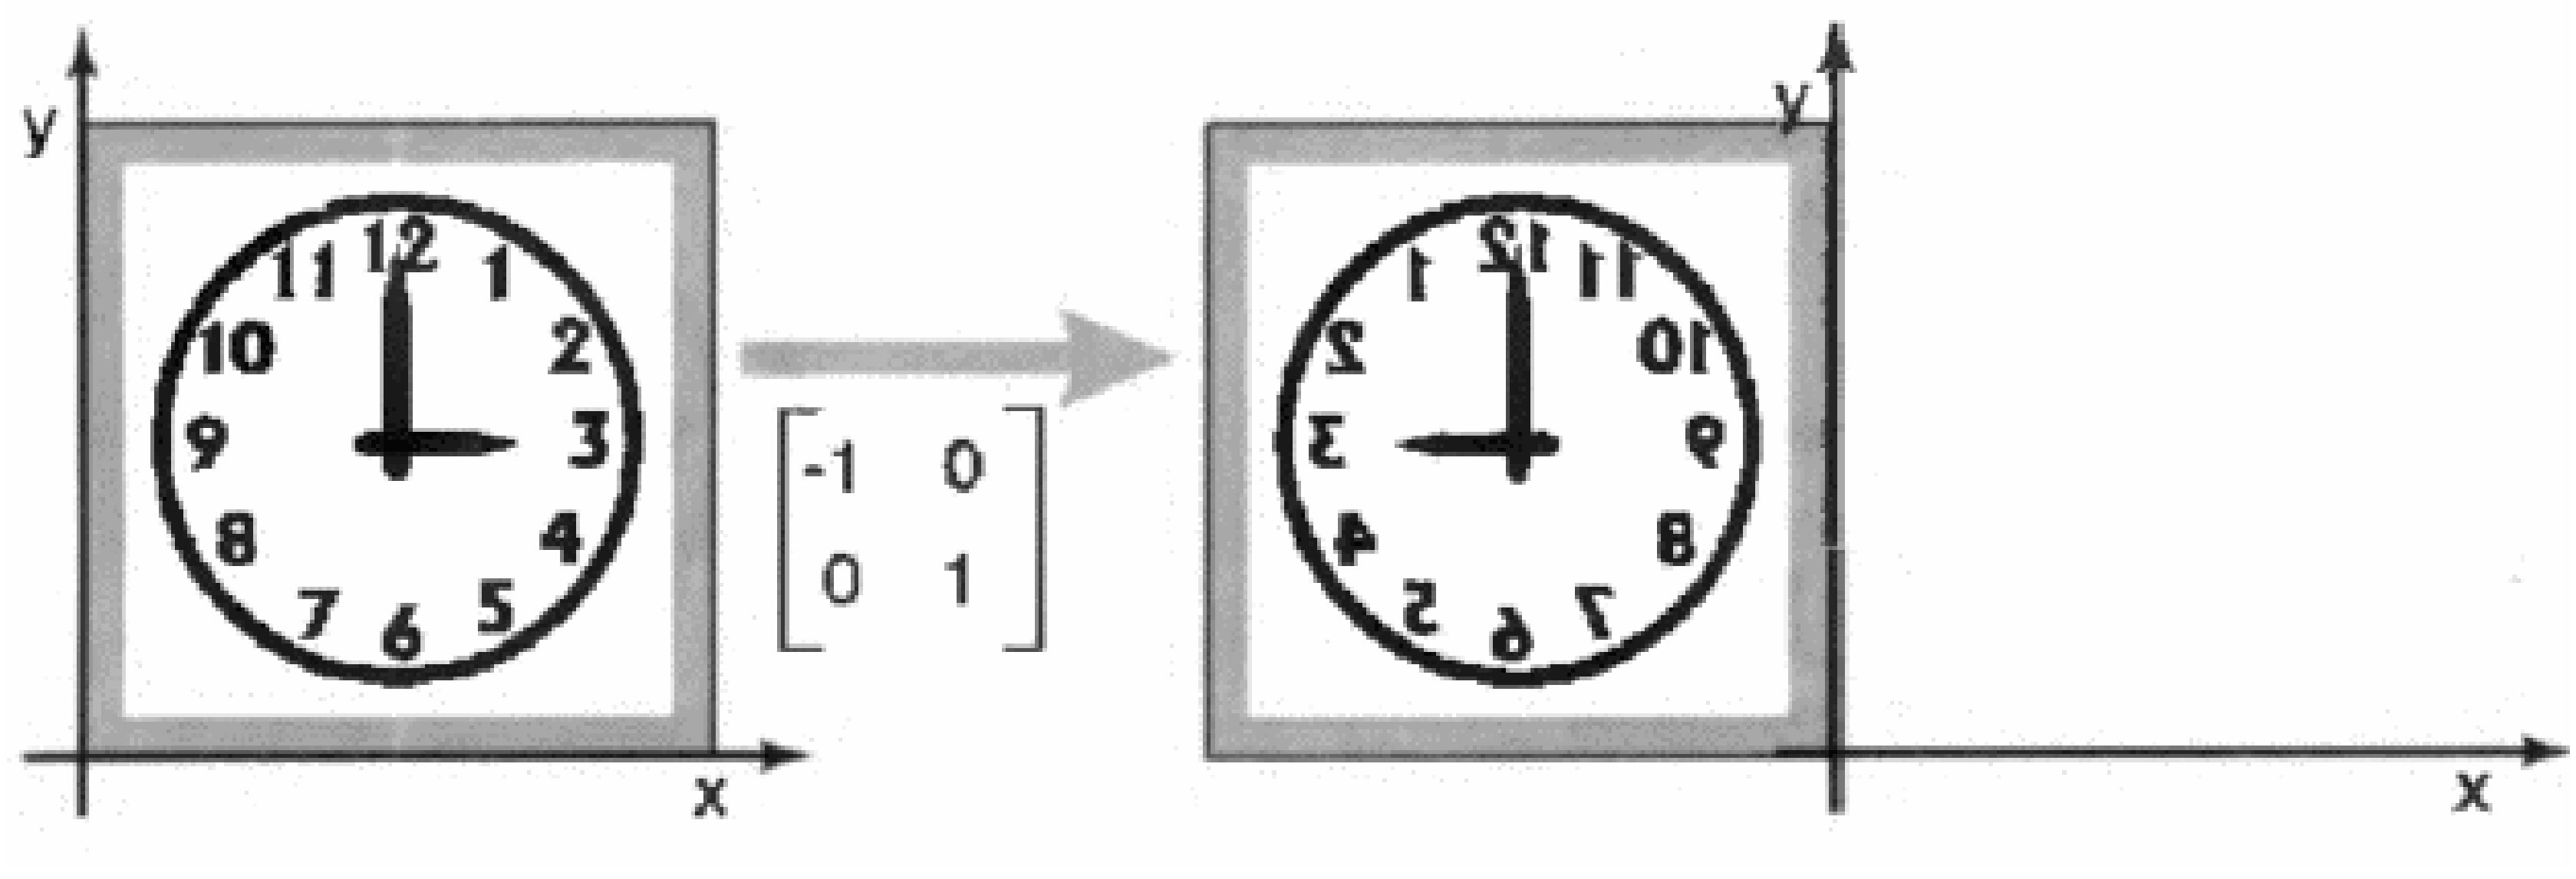

Composition of 2D Transforms

Two (or more) transformation matrices can be combined in one matrix

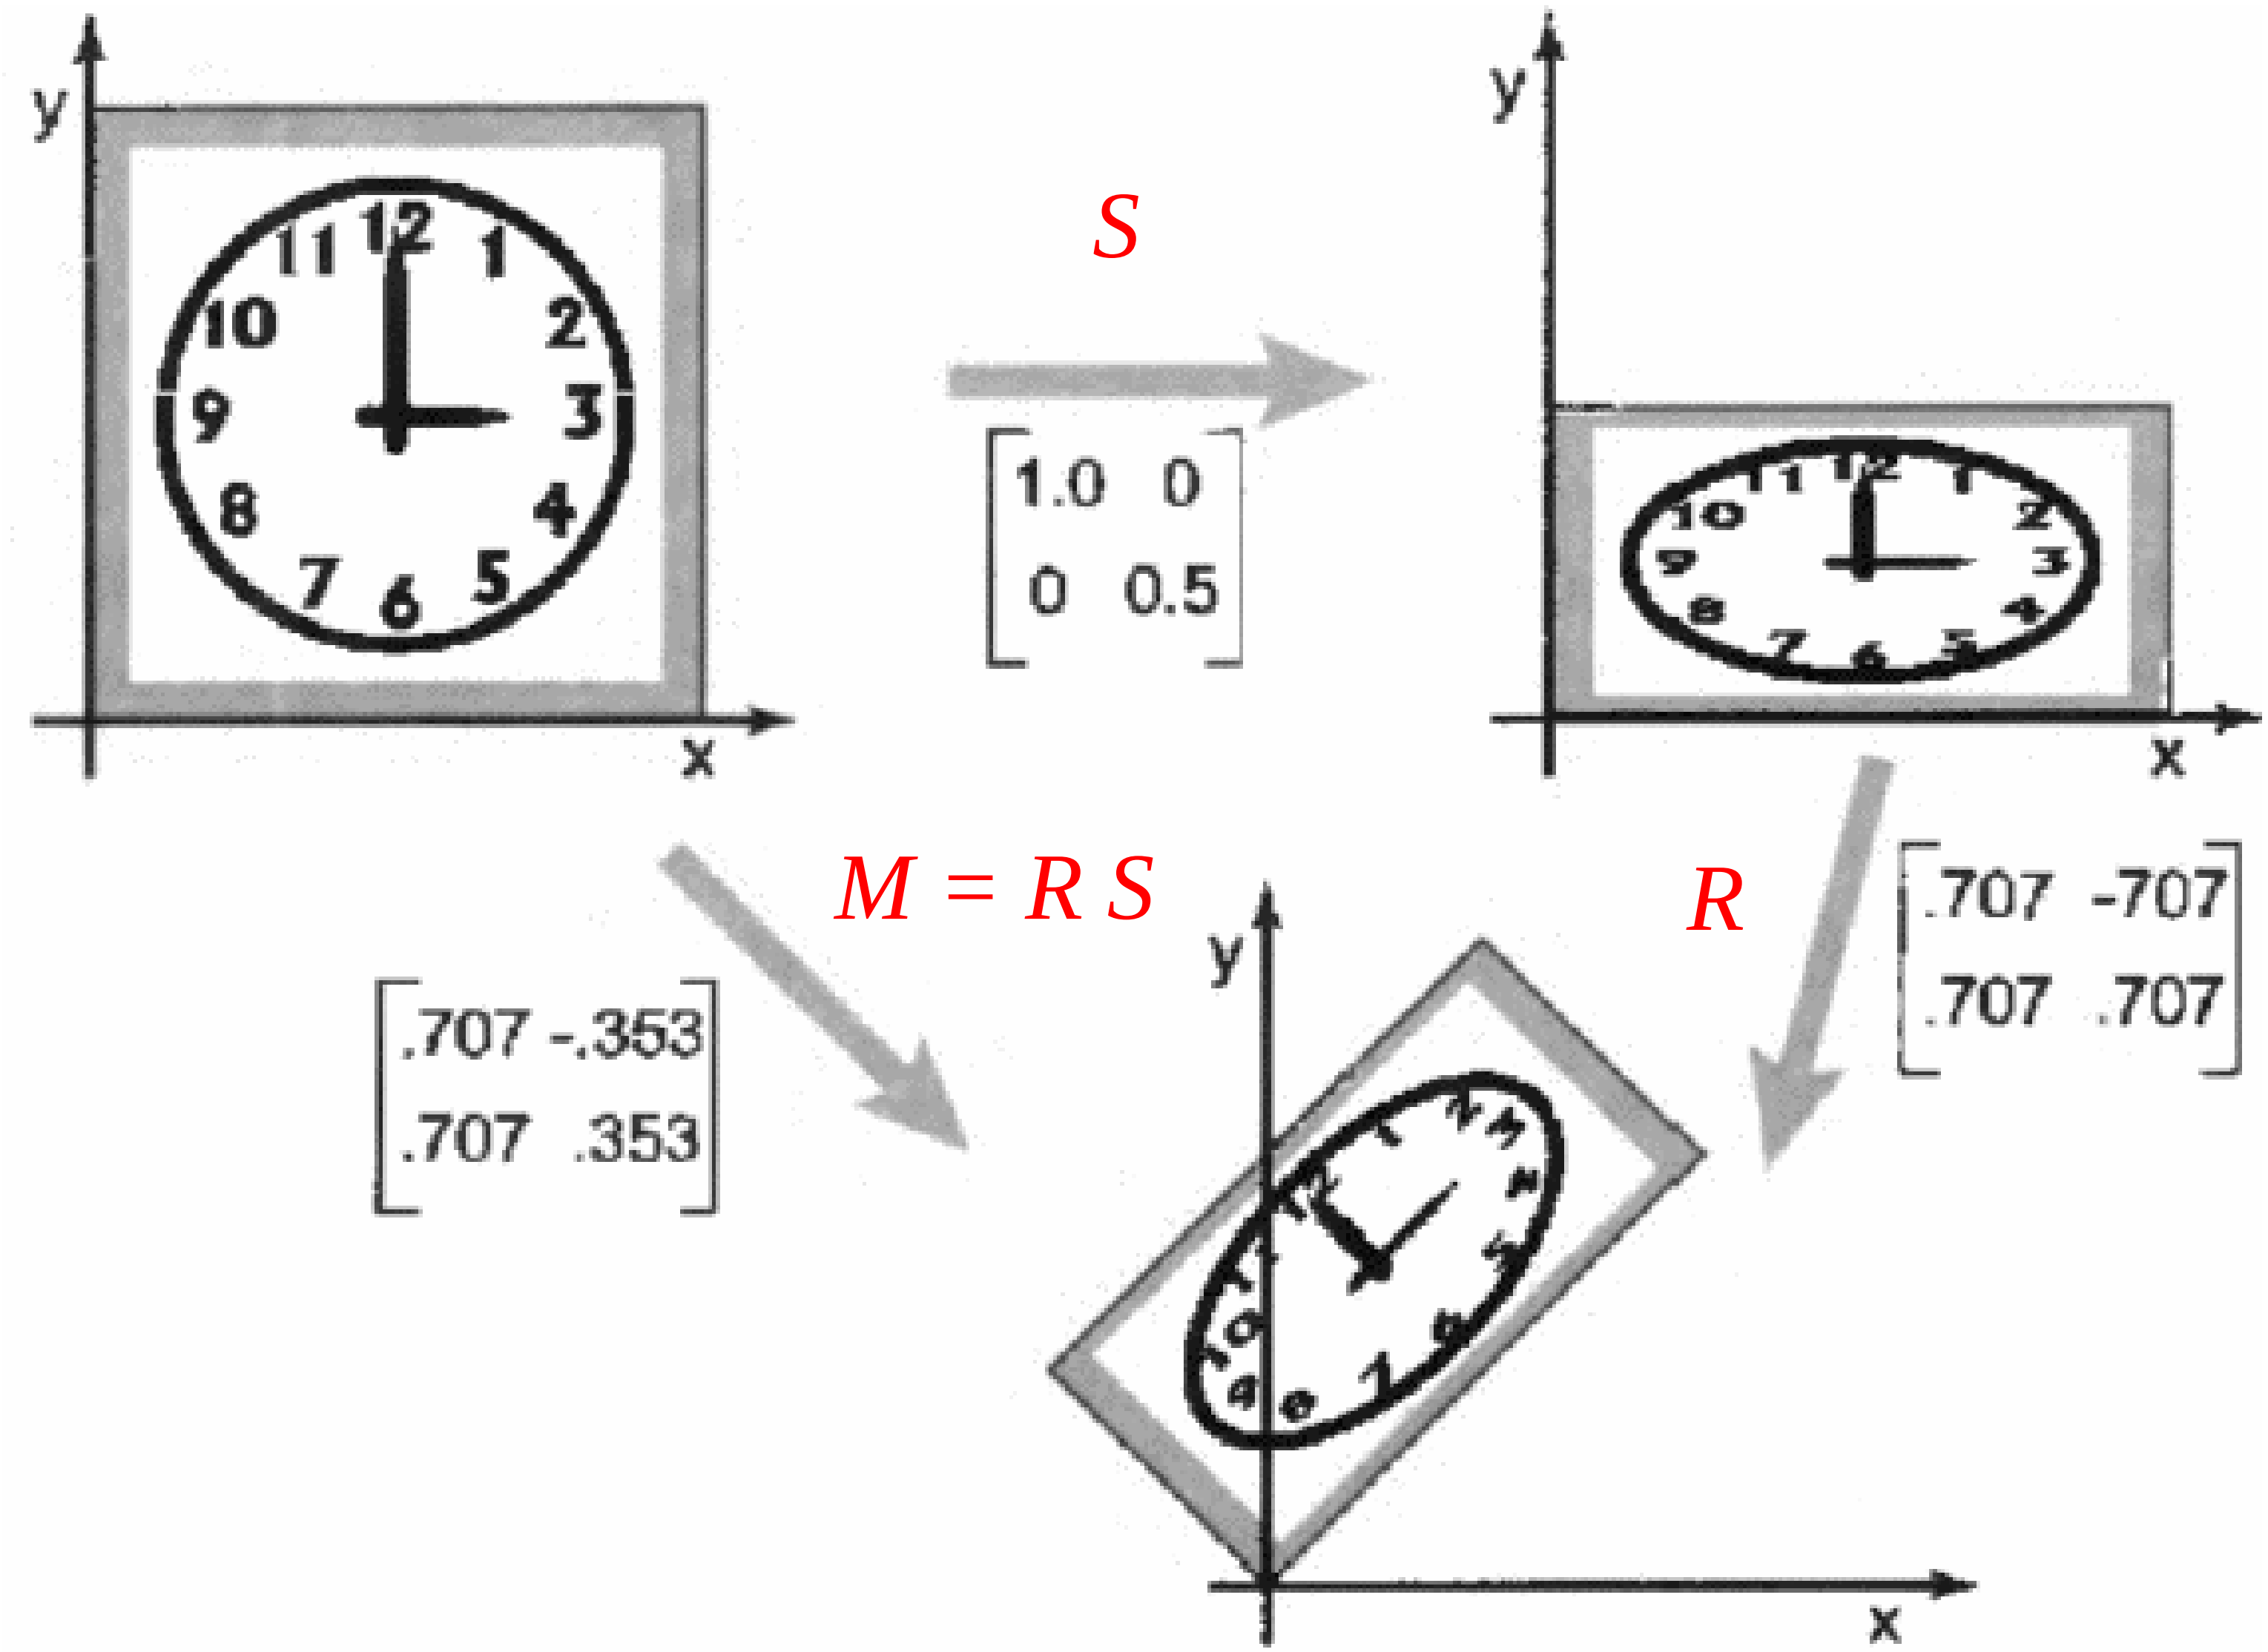

$$v_2 = S\,v_1$$
$$v_3 = R\,v_2$$
$$\downarrow$$
$$v_3 = (R\,S)\,v_1$$
$$v_3 = M\,v_1$$

where:

$$M = R\,S$$

trteb drb el matricies byb2a
mn el ymen ll shmal ->
fa kda hwa hena 3ml shear
el awl b3den 3ml rotation

Composition of 2D Transforms

Beware that the order of the transformations matters!

$$RS \neq SR$$

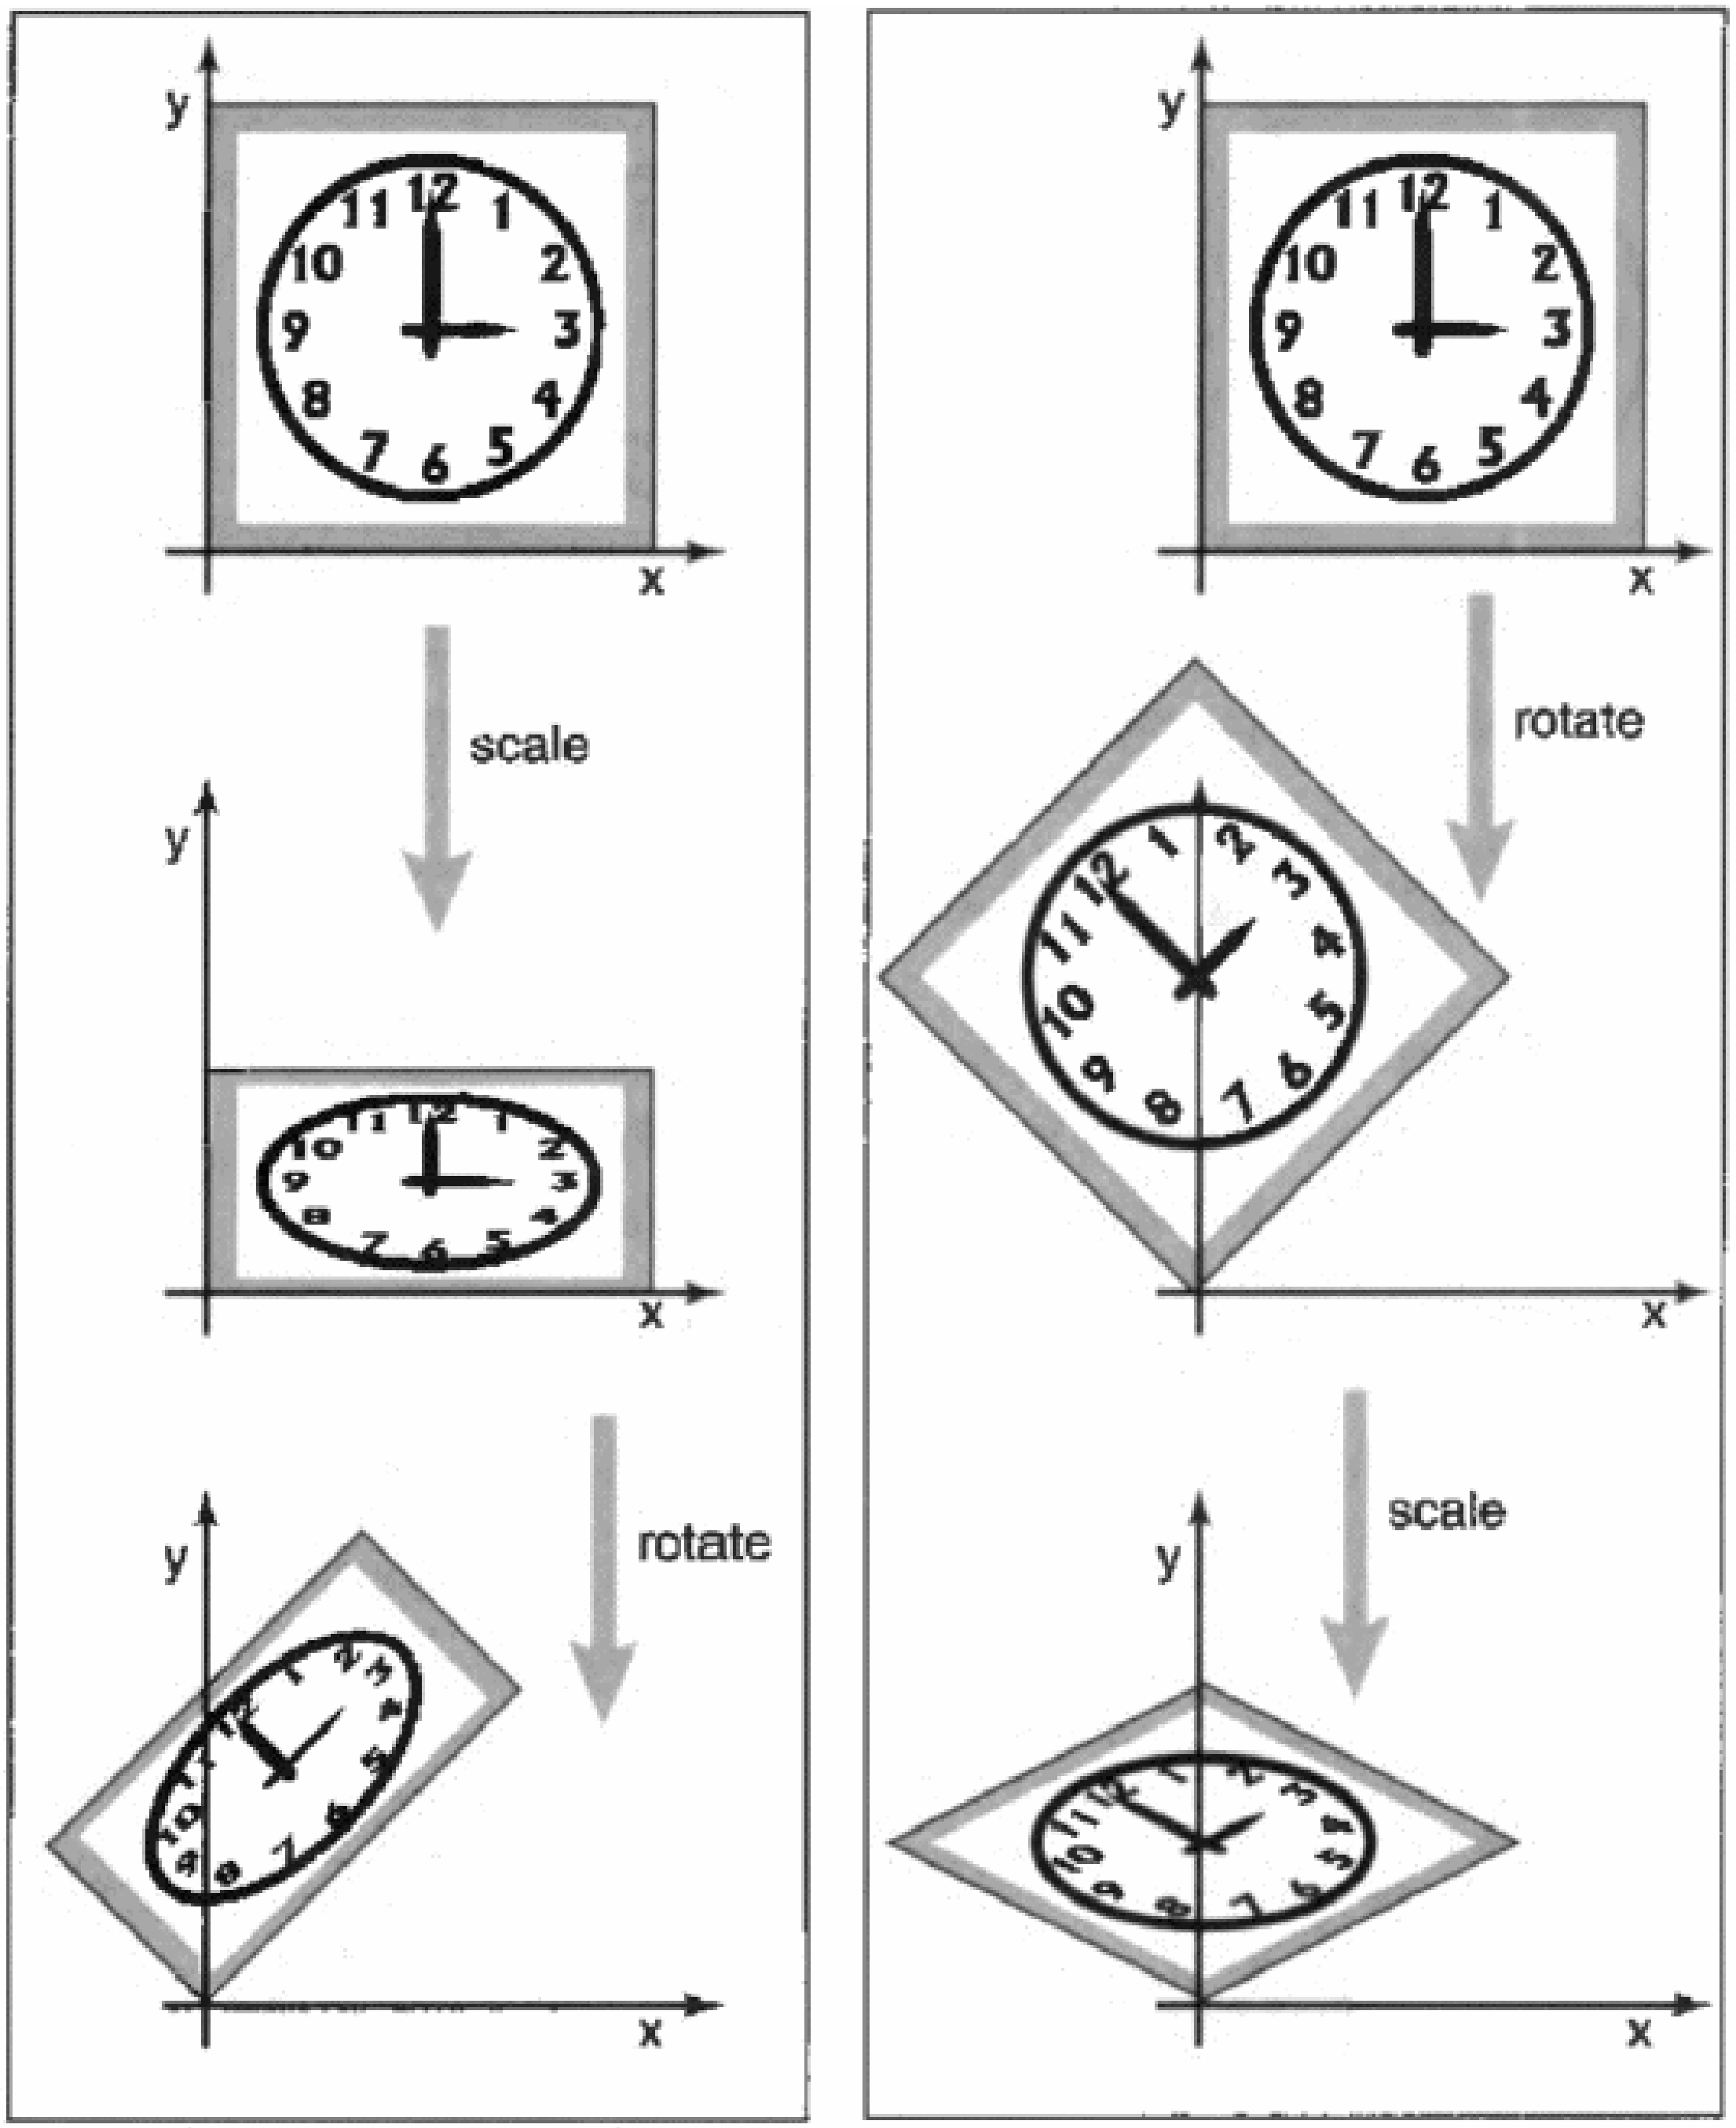

3D Scaling

Here we have scaling in three dimensions instead of two!

$$\text{scale}(s_x, s_y, s_z) = \begin{bmatrix} s_x & 0 & 0 \\ 0 & s_y & 0 \\ 0 & 0 & s_z \end{bmatrix}$$

3D Rotation

Here we have three possible *standard* axes to rotate around:

$$\text{rotate-z}(\phi) = \begin{bmatrix} \cos\phi & -\sin\phi & 0 \\ \sin\phi & \cos\phi & 0 \\ 0 & 0 & 1 \end{bmatrix}$$

$$\text{rotate-x}(\phi) = \begin{bmatrix} 1 & 0 & 0 \\ 0 & \cos\phi & -\sin\phi \\ 0 & \sin\phi & \cos\phi \end{bmatrix}$$

$$\text{rotate-y}(\phi) = \begin{bmatrix} \cos\phi & 0 & \sin\phi \\ 0 & 1 & 0 \\ -\sin\phi & 0 & \cos\phi \end{bmatrix}$$

3D Shear

Instead of just *one* factor for *y*, we have *two* factors for *y* and *z*:

$$\text{shear-x}(d_y, d_z) = \begin{bmatrix} 1 & d_y & d_z \\ 0 & 1 & 0 \\ 0 & 0 & 1 \end{bmatrix}$$

2D Translations

2D Transformations

$$p' = M_{2\times 2}\, p$$

$$x' = m_{11} x + m_{12} y$$
$$y' = m_{21} x + m_{22} y$$

Translation

$$x' = x + t_x$$
$$y' = y + t_y$$

How can we represent *Translation* as Matrix Multiplication?

2D Translations

Solution: add z=1 to 2D points

$$\begin{bmatrix} 1 & 0 & t_x \\ 0 & 1 & t_y \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} x \\ y \\ 1 \end{bmatrix} = \begin{bmatrix} x + t_x \\ y + t_y \\ 1 \end{bmatrix}$$

What about vectors?

$z = 0$!

Homogeneous Coordinates

Convert 2D points into 3D points

$$v = \begin{bmatrix} x \\ y \end{bmatrix} \rightarrow \tilde{v} = \begin{bmatrix} x \\ y \\ 1 \end{bmatrix}$$

2D Transformations with 3x3 matrix

$$\tilde{v}' = M\,\tilde{v}$$

2D Transformations

Translation

$$\begin{bmatrix} 1 & 0 & t_x \\ 0 & 1 & t_y \\ 0 & 0 & 1 \end{bmatrix}$$

Rotation

$$\begin{bmatrix} \cos\theta & -\sin\theta & 0 \\ \sin\theta & \cos\theta & 0 \\ 0 & 0 & 1 \end{bmatrix}$$

$$v = \begin{bmatrix} x \\ y \\ 1 \end{bmatrix}$$

Shear

$$\begin{bmatrix} 1 & s & 0 \\ 0 & 1 & 0 \\ 0 & 0 & 1 \end{bmatrix}$$

Scaling

$$\begin{bmatrix} s_x & 0 & 0 \\ 0 & s_y & 0 \\ 0 & 0 & 1 \end{bmatrix}$$

Can represent any combination by a 3x3 matrix

2D Transformations

Rotation/Scale/Shear + Translation

$$\begin{bmatrix} 1 & 0 & t_x \\ 0 & 1 & t_y \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} a_{11} & a_{12} & 0 \\ a_{21} & a_{22} & 0 \\ 0 & 0 & 1 \end{bmatrix} = \begin{bmatrix} a_{11} & a_{12} & t_x \\ a_{21} & a_{22} & t_y \\ 0 & 0 & 1 \end{bmatrix} = \begin{bmatrix} R_{2\times 2} & t_{2\times 1} \\ 0^T & 1 \end{bmatrix}$$

Rotation part + translation part

3D Translations

Homogeneous Coordinates

$$\begin{bmatrix} 1 & 0 & 0 & t_x \\ 0 & 1 & 0 & t_y \\ 0 & 0 & 1 & t_z \\ 0 & 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} x \\ y \\ z \\ 1 \end{bmatrix} = \begin{bmatrix} x + t_x \\ y + t_y \\ z + t_z \\ 1 \end{bmatrix}$$

3D Transformations

Translation

$$\begin{bmatrix} 1 & 0 & 0 & t_x \\ 0 & 1 & 0 & t_y \\ 0 & 0 & 1 & t_z \\ 0 & 0 & 0 & 1 \end{bmatrix}$$

Rotation

$$\begin{bmatrix} r_{11} & r_{12} & r_{13} & 0 \\ r_{21} & r_{22} & r_{23} & 0 \\ r_{31} & r_{32} & r_{33} & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix}$$

$$v = \begin{bmatrix} x \\ y \\ z \\ 1 \end{bmatrix}$$

Can represent any combination by a 4x4 matrix

3D Transformations

Rotation/Scale/Shear + Translation

$$\begin{bmatrix} 1 & 0 & 0 & t_x \\ 0 & 1 & 0 & t_y \\ 0 & 0 & 1 & t_z \\ 0 & 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} a_{11} & a_{12} & a_{13} & 0 \\ a_{21} & a_{22} & a_{23} & 0 \\ a_{21} & a_{22} & a_{33} & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} = \begin{bmatrix} a_{11} & a_{12} & a_{13} & t_x \\ a_{21} & a_{22} & a_{23} & t_y \\ a_{21} & a_{22} & a_{33} & t_z \\ 0 & 0 & 0 & 1 \end{bmatrix} = \begin{bmatrix} R_{3\times 3} & t_{3\times 1} \\ 0^T & 1 \end{bmatrix}$$

Rotation part + translation part

Transformation Inverse

$$M \rightarrow M^{-1}$$

$$Rotation\ R \rightarrow R^{T}$$

$$translation(\boldsymbol{t}) \rightarrow translation(-\boldsymbol{t})$$

$$scale(s_x, s_y, s_z) \rightarrow scale(1/s_x, 1/s_y, 1/s_z)$$

$$M_1 M_2 \ldots M_n \rightarrow M_n^{-1} \ldots M_2^{-1} M_1^{-1}$$