


DEF

EN



MADE IN ITALY

DEF SOLUTIONS CATALOG

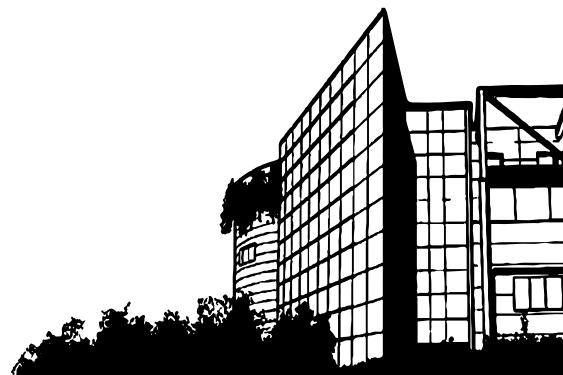

6.2023

COMPANY PROFILE

THE HISTORY OF KNOW-HOW

ABOUT US

PIUSI was established in 1953 in Suzzara, in the province of Mantua (Italy). For more than 60 years, PIUSI has been the major player in the world's leading markets with its full range of products for transferring, refilling, and measuring lubricants, fuels, and liquids such as gasoline, diesel, Diesel Exhaust Fluid (DEF), oil, water, and grease. Some of PIUSI's main products include pumps, flow meters, nozzles, dispensers, hose reels, liquid level gauges, software and complete kits used by operators in agriculture, the automotive industry, workshops, and garages, fleet management and transport by road and by sea. PIUSI products have many different uses such as monitoring and transferring fuel at trucking companies, refueling of agricultural vehicles, transferring fuels in construction and mining for heavy duty vehicles. The products are intuitive and easy to use; are suitable to be installed in a variety of contexts; are all made entirely in Italy; and all products express the innovation, quality, professionalism and R&D that have always distinguished PIUSI. Its headquarters are in Suzzara (Mantua - 150 km from Milan and Venice). The company currently employs more than 250 employees between sales, administration, R&D, production and logistics. PIUSI products are sold in more than 120 countries around the world thanks to a large network of distributors and the US branch based in Fort Lauderdale, FL. serving the North and South American markets.



PRODUCT RANGE	PRODUCT CATEGORY	PRODUCTS	PAGE
DEF KITS 	MINI-BULK	THREE25 TANK KIT	4
	MINI-BULK DISPENSERS	SELF SERVICE MC 2.0	4
		DEF BLUE BOX PEDESTAL	4
	SUBMERSIBLE PUMP	SQUALO35	5
	TOTE	THREE25	6
		SUZZARABLU TOTE KIT	7
	DRUM	SUZZARABLU DRUM KIT	8
PUMPS 	ELECTRIC PUMPS	SUZZARABLU AC, SUZZARABLU DC	9
	PNEUMATIC DIAPHRAGM PUMPS	MP140, MP190	9
	HAND PUMPS	DEF PISTON HAND PUMP KIT	10
		DEF ROTARY HAND PUMP IBC KIT	10
		DEF ROTARY HAND PUMP KIT	10
	MOBILE MINI-BULK	PIUSI PORTABLE TANKS	11
HOSE REELS 	HOSE REELS	DEF HOSE REEL	12
NOZZLES 	METERED NOZZLES	SB325_X METERED NOZZLE	13
	AUTOMATIC NOZZLES	SB325_X NOZZLE, DEF A60 AUTOMATIC NOZZLE	13
	MANUAL NOZZLES	DEF MANUAL NOZZLE	13
METERS 	DIGITAL	K24-DEF METER	14
	PULSER	K24-DEF PULSER	14
		TURBINOX	14
		REMOTE DISPLAY	14
TANK MONITORING 	TANK LEVEL INDICATORS	OCIO	14
		OCIO 2.0	14
ACCESSORIES 	COUPLINGS AND FITTINGS	HOSETAILS, SWIVELS, CLAMP KIT, ETC	15
	SOCKETS	NPT/NPT, NPT/BSP, BSP/BSP	15
	IBC ACCESSORIES	PDC, GRAVITY KIT, ADAPTERS, COUPLERS, VALVES, ETC	15
	HOSES	SUCTION, DELIVERY	15
	ROTARY HAND PUMP ACCESSORIES	PDC WITH LATCH, ADAPTER, HOSE	15
	NOZZLE ACCESSORIES	REPLACEMENT SPOUTS, ADAPTORS, SWIVEL, PROTECTOR	15

PRODUCT RANGE

DEF MINI-BULK

The DEF Mini-Bulk Kits make up a complete line of **DEF transfer storage and dispense systems**. Available with customizable kit options, the system is available with either our **Three25 membrane pump kit** or our **Squalo submersible pump kit**. All standard kits include tank, pump, fill line, dispense hose and auto nozzle.

NEW 675-GALLON TANK

500-GALLON TANK



1000-GALLON TANK



TANK DESIGN/PUMP OPTION/CONFIGURATION/ACCESSORIES MAY VARY FROM IMAGES ABOVE. ABOVE IMAGES ARE FOR REFERENCE ONLY.
CUSTOMIZED CONFIGURATION AVAILABLE UPON REQUEST.

1500-3000 GALLON TANKS ALSO AVAILABLE UPON REQUEST. CONTACT US DIRECTLY FOR MORE INFORMATION.

PART #	DETAILS	FLUID TYPE	FLOW RATE GPM	SQUALO HORSE POWER	THREE25 HORSE POWER	MAX AMP	HOSE LENGTH (FT)	NOZZLE
SRT0500BULK	500- GALLON DEF TANK + THREE25 KIT BUNDLE	A D W	9 - 10	-	0.67HP	3.7	20	AUTOMATIC
SRT0675BULK	675+ GALLON DEF TANK + THREE25 KIT BUNDLE	A D W	9 - 10	-	0.67HP	3.7	20	AUTOMATIC
SRT1000BULK	1000-GALLON DEF TANK + THREE25 KIT BUNDLE	A D W	9 - 10	-	0.67HP	3.7	20	AUTOMATIC
SRTSQ0500BULK	500-GALLON DEF TANK + SQUALO KIT BUNDLE	A D W	9 - 10	0.5HP	-	3.7	20	AUTOMATIC
SRTSQ0675BULK	675+ GALLON DEF TANK + SQUALO KIT BUNDLE	A D W	9 - 10	0.5HP	-	3.7	20	AUTOMATIC
SRTSQ1000BULK	1000-GALLON DEF TANK + SQUALO KIT BUNDLE	A D W	9 - 10	0.5HP	-	3.7	20	AUTOMATIC

SQUALO35

SUBMERSIBLE PUMPS

SQUALO35 is the **first submersible pump specifically designed for use with DEF**. A centrifugal pump fitted with a turbine regenerator, built-in check valve and bypass valve, the Squalo provides both **flow rate** and up to **150ft** of dispense distance. Its **compact size** allows it to fit into both **IBC totes** and **Mini Bulk** systems. And, its dead level height is down to 1-1/4", maximizing fluid consumption.

SQUALO35 IN TOTE

DETAILS



-  120V/60HZ
-  DUTY CYCLE:
20 MIN ON/OFF
-  11-MINUTE TIMER



SQUALO IBC KIT PICTURED. IBC NOT PROVIDED



SQUALO35 IBC KIT

FITS IN A TOTE

10 GPM

STANDARD SQUALO IBC KIT INCLUDES:

- RSV CONTAINER VALVE
- RPV COMPOSITE COUPLER
- 6" IBC DUAL BUNG COVER
- 20FT DELIVERY HOSE
- SQUALO35
- SB325 AUTOMATIC NOZZLE
- 1" BSP-F TO 3/4" BARB HOSETAIL AND CLAMPS
- THREE25 SUPPORT FRAME



SQUALO IBC KIT PICTURED. IBC NOT PROVIDED

PART #	DETAILS	FLUID TYPE	FLOW RATE GPM	HORSE POWER	MAX AMP	WEIGHT LBS	PACKAGING INCH
FOO206O4	SQUALO35	  	10	0.5HP	9	15.4	20 x 9.4 x 5.6
RKSQUALOK1	SQUALO IBC KIT	  	10	0.5HP	9	-	-
RKSQUALOK2	SQUALO MINI BULK KIT (SEE PAGE 4)	  	10	0.5HP	9	-	-

THREE25

PREMIUM DEF TRANSFER PUMP

Discover a **new dimension of fluid handling** with the Piusi Three25. Created to **ensure optimum durability and efficiency**, the Piusi Three25 is protected by our DEF 3D filter, which **prevents contamination** of your DEF and **increases life of the vehicle's catalyst**.

DETAILS



- UP TO 9 GPM
- HOSE LENGTH: 20 FT
- AC/DC VOLTAGE
- DUTY CYCLE: 20 MIN ON/OFF

9 GPM



- 1 DEF 3D Filter**
Part # FOO611D40
- 2 Sturdy, stainless steel, plate with roll bar protection**
- 3 Piusi DEF Coupler (PDC) for common IBC tank steel coupling systems**
- 4 New security lock bracket system**
- 5 High-Capacity Hose Holder and Practical Nozzle Holder**
- 6 Crimped EPDM delivery hose**
- 7 SB325-metered automatic nozzle with break-away system and stainless steel spout**

PART #	DETAILS	FLUID TYPE	HORSE POWER	MAX AMP	HOSE LENGTH (FT)	ON/OFF SWITCH	WEIGHT LBS	PACKAGING INCH
FOO101A0	THREE25 - 120V		0.67HP	2	20	YES	32	19.3 x 15.4 x 12.2
FOO101A1	THREE25 - 12V		0.67HP	22	20	YES	28	19.3 x 15.4 x 12.2
FOO101A3	THREE25 TANK KIT (SEE PAGE 4)		0.67HP	2	-	-	28	21 x 17 x 15

SUZZARABBLUE TOTE KIT

 UP TO 9 GPM
 HOSE LENGTH: 20 FT

 AC/DC VOLTAGE
 DUTY CYCLE:
20 MIN ON/OFF

RSV CLOSED SYSTEM

****ACCESSORIES SOLD SEPARATELY****




- PRO KIT**
- HEAVY-DUTY DEF PUMP
 - STAINLESS STEEL BASE
 - NOZZLE HOLDER
 - 20FT DELIVERY HOSE
 - 4FT SUCTION HOSE
 - AUTOMATIC NOZZLE
 - HOSE TAIL AND CLAMPS
 - K24 DEF FLOW METER



- BASIC+ KIT**
- HEAVY-DUTY DEF PUMP
 - STAINLESS STEEL BASE
 - NOZZLE HOLDER
 - 20FT DELIVERY HOSE
 - 4FT SUCTION HOSE
 - AUTOMATIC NOZZLE
 - HOSE TAIL AND CLAMPS



- BASIC KIT**
- HEAVY-DUTY DEF PUMP
 - STAINLESS STEEL BASE
 - NOZZLE HOLDER
 - 20FT DELIVERY HOSE
 - 4FT SUCTION HOSE
 - MANUAL NOZZLE
 - HOSE TAIL AND CLAMPS

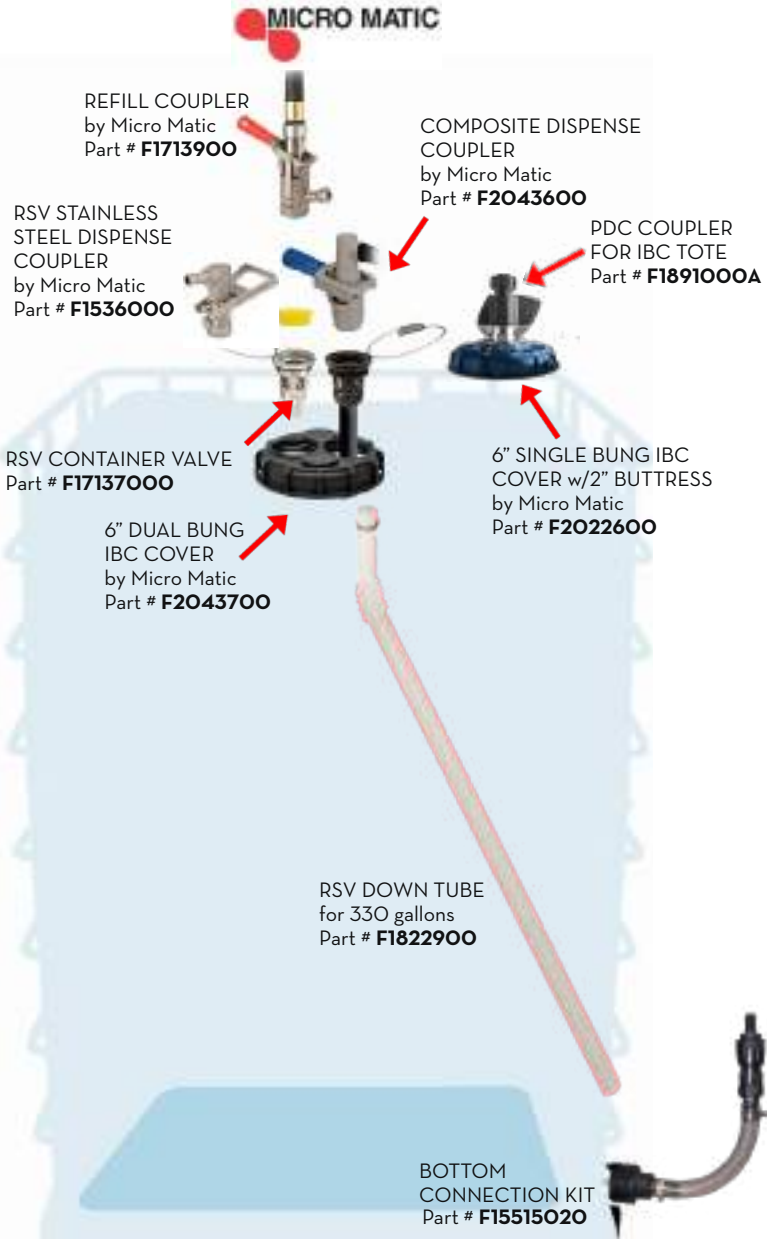

PART #	DETAILS	FUEL TYPE	HORSE POWER	MAX AMP	HOSE LENGTH (FT)	WEIGHT LBS	PACKAGING INCH
FOO201A1	SUZZARABBLUE TOTE 120V PRO: PUMP, METER, AUTO NOZZLE		0.67HP	4.7	20	35.3	18.3 x 14.6 x 10.4
FOO201A2	SUZZARABBLUE TOTE 120V BASIC: PUMP, MANUAL NOZZLE		0.67HP	4.7	20	27.8	18.3 x 14.6 x 10.4
FOO201A5	SUZZARABBLUE TOTE 120V BASIC+: PUMP, AUTO NOZZLE		0.67HP	4.7	20	32	18.3 x 14.6 x 10.4
FOO201A6	SUZZARABBLUE TOTE 12V BASIC+: PUMP, AUTO NOZZLE		0.35HP	22	20	22	18.3 x 14.6 x 10.4
FOO201A8	SUZZARABBLUE TOTE 12V PRO: PUMP, METER, AUTO NOZZLE		0.35HP	22	20	27.8	18.3 x 14.6 x 10.4
FOO201A9	SUZZARABBLUE TOTE 12V BASIC: PUMP, MANUAL NOZZLE		0.35HP	22	20	22	18.3 x 14.6 x 10.4

SUZZARABLUE DRUM KIT

 UP TO 9 GPM
 HOSE LENGTH: 20 FT

 AC/DC VOLTAGE
 DUTY CYCLE:
20 MIN ON/OFF



EPV CLOSED SYSTEM

****ACCESSORIES SOLD SEPARATELY****



PRO KIT

- STAINLESS STEEL BASE
- NOZZLE HOLDER
- HEAVY-DUTY PUMP
- SB325 METERED AUTOMATIC NOZZLE
- 20 FT DELIVERY HOSE
- 1.5 FT SUCTION HOSE
- 6.5 MINUTE AUTOMATIC SHUTOFF (120V ONLY)



BASIC+ KIT

- STAINLESS STEEL BASE
- NOZZLE HOLDER
- HEAVY-DUTY PUMP
- AUTOMATIC STAINLESS STEEL NOZZLE
- 20 FT DELIVERY HOSE
- 1.5 FT SUCTION HOSE
- 6.5 MINUTE AUTOMATIC SHUTOFF



BASIC KIT

- STAINLESS STEEL BASE
- NOZZLE HOLDER
- HEAVY-DUTY PUMP
- MANUAL NOZZLE
- 20 FT DELIVERY HOSE
- 1.5 FT SUCTION HOSE
- 6.5 MINUTE AUTOMATIC SHUTOFF

EPV Coupler
Part # **F16477000**



EPV Container Valve
Part # **F16989000**



EPV Down Tube
Part # **F16992000**



****TOTE KIT PICTURED ON TROLLEY****



SUZZARABLUE TROLLEY CART

Part # **F1206801**

Perfect for Three25 and SuzzaraBlue hanging kits. Capable of carrying up to 550 lbs.

PART #	DETAILS	FUEL TYPE	HORSE POWER	MAX AMP	HOSE LENGTH (FT)	WEIGHT LBS	PACKAGING INCH
FOO201A3	SUZZARABLUE DRUM 120V BASIC: PUMP, MANUAL NOZZLE	  	0.67HP	495	20	27	18.3 x 14.6 x 10.4
FOO201A4	SUZZARABLUE DRUM 120V BASIC+: PUMP, AUTO NOZZLE	  	0.67HP	495	20	31	18.3 x 14.6 x 10.4
FOO201ALB	SUZZARABLUE 120V 9GPM DRUM PRO KIT (AUTO/METER)	  	0.67HP	495	20	28	18.3 x 14.6 x 10.4
FOO201AM	SUZZARABLUE DRUM 12V PRO: PUMP, METERED AUTO NOZZLE	  	0.35HP	495	20	28	18.3 x 14.6 x 10.4
F1206801	SUZZARABLUE TROLLEY CART	  	-	-	-	59	43 x 27 x 13

SUZZARABLU PUMPS



AC

The Piusi SUZZARABLU AC PUMP is the industry standard self-priming DEF diaphragm pump. It is equipped with electric motor, 6.5 minute timer board, and does not require dynamic seals.

UP TO 9 GPM

DUTY CYCLE:
20 MIN ON/OFF



DC

The Piusi SUZZARABLU DC DEF PUMP is the perfect solution for mobile, battery-powered applications. This self-priming pump is equipped with a built-in pressure bypass.

PART #	DETAILS	FUEL TYPE	HORSE POWER	MAX AMP	GPM	WEIGHT LBS	PACKAGING INCH
FOO20310	SUZZARABLU AC PUMP - 120V		0.67HP	4.7	9	15.4	14 x 12 x 7.9
FOO20408	SUZZARABLU DC PUMP - 12V		0.35HP	22	9	10	14 x 12 x 7.9
FOO20409	SUZZARABLU AC PUMP - 24V		0.42HP	13	9	9	14 x 12 x 7.9
FOO20402	SUZZARABLU AC PUMP - 12V+18FT CABLE		0.35HP	22	9	10	14 x 12 x 7.9

PIUSI MP

AIR OPERATED DIAPHRAGM PUMP

MP140




DETAILS


- UP TO 26 GPM
- MAX SELF PRIMING: 20'
- MAX AIR SUPPLY PRESSURE: 101 PSI
- MAX PASSING SOLID: Ø0.16"



STURDY DESIGN



HEAVY DUTY MATERIALS




TECHNOP. BODY

MP190



DETAILS

- UP TO 58 GPM
- MAX SELF PRIMING: 20'
- MAX AIR SUPPLY PRESSURE: 101 PSI
- MAX PASSING SOLID: Ø0.16"



STURDY DESIGN



HEAVY DUTY MATERIALS



TECHNOP. BODY

PART #	DETAILS	FUEL TYPE	HORSE POWER	MAX AMP	GPM	WEIGHT LBS	PACKAGING INCH
FOO208P5	MP 140 PNEUMATIC DIAPHRAGM PUMP		-	-	26	11	9.4 x 15 x 13.8
FOO208P6	MP 190 PNEUMATIC DIAPHRAGM PUMP		-	-	58	29	19 x 19 x 12

DEF HAND PUMPS

The PIUSI DEF Rotary Hand Pump is the only rotary vane pump specifically designed for transferring DEF.

DEF ROTARY HAND PUMP DRUM KIT



- DEF ROTARY HAND PUMP KIT INCLUDES:
- 9FT DISPENSING HOSE
 - STAINLESS STEEL SPOUT
 - FLEXIBLE SUCTION PUMP
 - DRUM CONNECTOR 2.44" (SOLD SEPARATELY)
 - FILTER AVAILABLE

- Eliminates the siphon effect with integrated check valve and provides immediate dispensing
- Maintenance free for 250,000 gallons
- Self-Priming
- Prevent DEF crystallization

DETAILS



DEF PISTON HAND PUMP KIT



DETAILS



DEF ROTARY HAND PUMP IBC KIT



SEE PAGES 7 & 8 FOR CLOSED LOOP SYSTEMS

DETAILS



PART #	DETAILS	FUEL TYPE	CAPACITY PER 100 REVOLUTIONS (GAL)	HOSE LENGTH (FT)	WEIGHT LBS	PACKAGING INCH
FOO33213	DEF PISTON HAND PUMP KIT	A D W W	-	10	3.3	6.3 x 13.4 x 5.5
FOO332A3	DEF ROTARY HAND PUMP KIT	A D W W	38	9	7	14 x 10 x 7
FOO332B0	DEF ROTARY HAND PUMP IBC KIT	A D W W	38	9	8	11.5 x 12 x 7

PIUSI PORTABLE TANKS

For universal and durable **DEF transportation and storage**, the Piusi Portable Tank (PPT) offers an effective solution to deliver DEF to on-road and **off-road** vehicles. The PPT ensures a safe and quick DEF transfer utilizing its **Suzzarablu** DC pump, shock resistant polyethylene construction, vent cap, and stainless steel accessories. The lightweight lockable tanks are UV resistant and can be easily loaded onto your delivery vehicle.

-  12V DC
-  DUTY CYCLE:
20 MIN ON/OFF
-  HOSE LENGTH: 13 FT



116 GALLON

- 1 SuzzaraBlue 12V DC Pump
- 2 2" filling plug with integrated vent
- 3 Lockable lid
- 4 13 ft. outflow hose
- 5 SB325 Automatic Nozzle
- 6 Nozzle Holder
- 7 6.5 ft. cable with clamps
- 8 Mechanical level gauge (116g only)

AVAILABLE ACCESSORIES

UPGRADE TO A
METERED NOZZLE



SB325 Metered
Part # F00617010



58 GALLON

DETAILS



PIUSI PORTABLE TANK 116G



PIUSI PORTABLE TANK 58G



PART #	DETAILS	FLUID TYPE	FLOW RATE GPM	HORSE POWER	MAX AMP	WEIGHT LBS	PACKAGING INCH
F0010201	PIUSI PORTABLE TANK (116G)	  	9	0.67HP	22	114	48 x 32 x 31
F0010200	PIUSI PORTABLE TANK (58G)	  	9	0.67HP	22	53	36 x 24 x 26

DEF HOSE REEL

Hose reels made specifically for DEF use with supply hoses. Designed to **limit pressure loss** and facilitate use. They include a protective latch mechanism that prevents accidental contact with hands. These **spring-loaded** hose reels offer **adjustable arms** for easy positioning and an optional rotating wall support for different positions.



MAX HOSE LENGTH: 50'



OPERATING PRESSURE:
145 PSI

DETAILS




HAND
PROTECTION



ACCESSORIES
INCLUDED



TOTE
BRACKET KIT
F17275000



ROTATING
SUPPORT
PLATE 25'
F1731700A
OPTIONAL



ROTATING
SUPPORT
PLATE 50'
F1627900A
OPTIONAL

- HOSE REEL INCLUDES:
- PROTECTIVE LATCH
 - ADJUSTABLE POSITIONING ARM
 - OPTIONAL WALL SUPPORT PLATE



EXTERNAL DEF
HOSE REEL
FITTING



INTERNAL DEF
HOSE REEL
FITTING

HOSE REEL TOTE MOUNT BASE

Part # F1727500

PUMP, NOZZLE & HOSE REEL
SOLD SEPARATELY



PART #	DETAILS	FUEL TYPE	HOSE LENGTH (FT)	WEIGHT LBS	PACKAGING INCH
FO0750340	DEF HOSE REEL WITH 3/4" HOSE - 25FT	  	25	37.5	21.7 x 10.2 x 21.3
FO0750330	DEF HOSE REEL WITH 3/4" HOSE - 50F	  	50	52.9	21.7 x 10.2 x 21.3

DEF NOZZLES

SB325_X SB325_X METERED NOZZLES



 **UP TO 12 GPM**
 **OPERATING PRESSURE: 50 PSI**


BREAK-AWAY SYSTEM

In the event that a vehicle accidentally drives away with the nozzle still in the tank, the spout is designed to detach from the nozzle. This system allows for a quick repair by merely fitting a new spout onto the nozzle.



MIS-FILLING SPOUT KIT

Transform a standard SB325_X nozzle into a SB325_X Mis-Filling System by simply fitting a different spout onto the nozzle and inserting the tank adapter. This feature prevents you from having a misfill into the DEF tank.

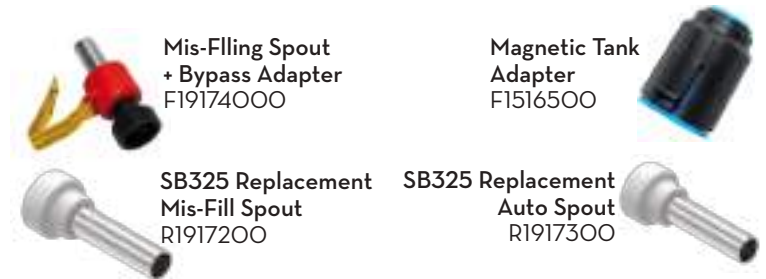

A60 AUTOMATIC NOZZLE



 **UP TO 11 GPM**
 **OPERATING PRESSURE: 50 PSI**

DEF MANUAL NOZZLE



 **UP TO 20 GPM**
 **OPERATING PRESSURE: 50 PSI**

PART #	DETAILS	FUEL TYPE	FLOW RATE	PRESSURE PSI	WEIGHT LBS	PACKAGING INCH
FOO61701	SB325_X METERED NOZZLE	  	12	50	22	17.6 x 7 x 2.5
FOO61700	SB325_X	  	12	50	1.5	17.6 x 7 x 2.5
FOO61903	DEF A60 AUTOMATIC NOZZLE WITH SWIVEL	  	11	50	5.7	14.1 x 14.1 x 10.8
FOO61902	DEF A60 AUTOMATIC NOZZLE WITHOUT SWIVEL	  	11	50	5.7	14.1 x 14.1 x 10.8
F1476100	DEF MANUAL NOZZLE	  	20	50	0.4	31.5 x 18.9 x 11.8

METERS & PULSERS



K24-DEF METER


The K24 meter is a easy-to-install turbine digital flow meter with a rotatable display specifically designed for DEF.

K24-DEF PULSER



REMOTE DISPLAY

TURBINOX

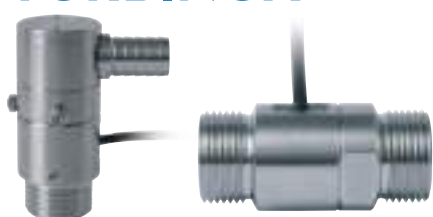

PULSE RATIO 1:1, 5, 10, 100

UP TO 26 GPM

$\pm 1\%$ ACCURACY

OPERATING PRESSURE: 145 PSI

PULSE RATIO 333:1

PART #	DETAILS	FUEL TYPE	PRESSURE PSI	FLOW RATE	WEIGHT LBS	PACKAGING INCH
FOO40734	K24-DEF METER		145	1.3 - 26.4	0.9	BLISTER
FOO40721	K24-DEF PULSER		145	1.3 - 26.4	0.9	4.5 x 3 x 5.3
FOO42000	TURBINOX PULSE METER		290	2.6 - 10.6	1.1	3.1 x 3.1 x 3
FOO49503	REMOTE DISPLAY		-	-	2.6	8.9 x 4.9 x 5.9

TANK MONITORING

OCIO 2.0



With it's new design, OCIO 2.0 is the upgraded version of the tank level indicator compatible with SSM 2.0 and MCO 2.0 systems. It requires a LAN or Wi-Fi connection to communicate with the software. It maintains all the performances of the standard OCIO. Thanks to its interchangeable probe, OCIO 2.0 is compatible with several fluids.

MAX TANK HEIGHT: 13'

UP TO 30 cSt

MAX TUBE LENGTH: 164'

$\pm 1\%$ ACCURACY

OCIO



PART #	DETAILS	FUEL TYPE	VISCOSITY cSt	POWER WATT	WEIGHT LBS	PACKAGING INCH
FOO75515	OCIO LEVEL INDICATOR		UREA	20	4.8	11.8 x 16.1 x 13.9
FOO75523	OCIO LEVEL INDICATOR 2.0 - LAN		UP TO 30	20	4.8	11.8 x 16.1 x 13.9
FOO75524	OCIO LEVEL INDICATOR 2.0 - WIFI		UP TO 30	20	4.8	11.8 x 16.1 x 13.9
FOO75525	OCIO LEVEL INDICATOR 2.0 - RS-485		UP TO 30	20	4.8	11.8 x 16.1 x 13.9

ACCESSORIES

COUPLINGS, FITTINGS, & FILTERS

PART #	DESCRIPTION
F15484000	HOSETAIL 90° 1" BSP-F TO 3/4" BARB
F15485000	HOSETAIL 90° 1" BSP-M TO 3/4" BARB
F15179000	SWIVEL 1" BSP-M/F PLASTIC
F16433000	FITTING 90° 1" BSP-F TO 1" BSP-F
F16434000	FITTING STRAIGHT 1" BSP-F TO 1" BSP-F
F16435000	HOSETAIL STRAIGHT 1" BSP-F TO 3/4" BARB
F15522000	HOSETAIL STRAIGHT 1" BSP-M TO 3/4" BARB
F15176000	NIPPLE M 1" BSP / M 1" BSP PLASTIC
F13800000	CLAMP KIT 25-35-12 SS AISI304 (10 PCS)
F14132000	SWIVEL STAINLESS 3/4" BSP-M X 3/4" BARB
R18188000	EXTERNAL DEF HOSE REEL FITTING
R1819400A/R18194000	INTERNAL DEF HOSE REEL FITTING
F16074000	SOCKET ADAPTOR KIT 1"NPT/NPT (20 PCS) SS
F16458000	ADAPTOR SS 1"NPT-F X 1"BSP-F (20 PCS)
F16073000	ADAPTOR SS 1"BSP-F X 1"BSP-F (20 PCS)
FOO611D30	PIUSI 3D FILTER FILTER + HOUSING
FOO611D40	PIUSI 3D FILTER CARTRIDGE REPLACEMENT




IBC ACCESSORIES

PART #	DESCRIPTION
F1891000A	PIUSI DEF COUPLER PDC
F15517010	SUZZARABLU GRAVITY KIT 2"NPT-F (MANUAL)
F15606000	DEF DISPENSE HOSE EPDM 3/4" ID 1.5FT
F15515020	BOTTOM CONNECTION KIT 2"NPT-F X 3/4" BARB
F20437000	6" IBC DUAL BUNG COVER
F20226000	6" IBC COVER W/ 2" BUTTRESS (BLUE)
F1536000	MICROMATIC RSV COUPLER
F20436000	MICROMATIC RPV COMPOSITE COUPLER
F17139000	REFILL COUPLER RSV 4-PIN (744-026) 35GPM
F17137000	CONTAINER VALVE RSV 2.5" X 5 B (743-097)
F18229000	DOWN TUBE RSV 49" (743-236)
F16477000	EPV COUPLER SS 3A EPDM 3/4" HOSE BARB
F16989000	EPV CONTAINER VALVE
F16990000	EPV DOWN TUBE



HOSES

PART #	DESCRIPTION
F1412400B	DEF SUCTION HOSE ROLL EPDM 3/4"ID (50FT)
F14125010	DEF DELIVERY HOSE 3/4" ID - NOT CRIMPED (20FT)
F1412505B	DEF DISPENSE HOSE ROLL EPDM 3/4"ID (164FT)
F15515000	EXT SUCTION HOSE IBC TANK W/FOOT VALVE
F15515020	BOTTOM CONNECTION KIT 2" NPT-F TO 3/4" BARB
F1907200A	DELIVERY HOSE 20FT "THREE25" BPRO CRIMPED
F19286000	SUCTION HOSE 5FT "THREE25" BPRO CRIMPED - FOR ALL DEF PUMP KITS



ROTARY HAND PUMP ACCESSORIES

PART #	DESCRIPTION
F20556000	PDC COUPLER W/ LATCH (ROTARY HAND PUMP)
F20195000	PDC-ROTARY HAND PUMP ADAPTER KIT
R19759000	DEF HAND PUMP CRIMPED DELIVERY HOSE



NOZZLE ACCESSORIES

PART #	DESCRIPTION
F19174000	SB325 MISFILL SPOUT W/ BYPASS ADAPTOR
F15165000	MAGNETIC TANK ADAPTOR FOR MISFILL SPOUT
F1840000	SB325 MAGNETIC BYPASS ADAPTOR (RED)
F16475000	ADAPTOR K24 TO AUTO3/4" BSP-M TO 1" BSP-F
R1917200A	SB325 REPLACEMENT MIS-FILL SPOUT
R1917300A	SB325 REPLACEMENT AUTO SPOUT
F15776000	SWIVEL 1" BSP -M/F PLASTIC MANUAL NOZZLE
F16497000	RUBBER PROTECTOR FOR HOSE 3/4"



DEF

*SINCE 1953, PIUSI HAS BEEN EMPLOYING ITALIAN ENGINEERING
SKILLS AT THE SERVICE OF ITS CUSTOMERS, WITH
PROFESSIONALISM AND INTEGRITY IN ORDER TO BUILD STABLE
AND LASTING RELATIONSHIPS.*

*OUR MISSION IS TO PROVIDE SIMPLE, INTELLIGENT AND
PROFESSIONAL SOLUTIONS FOR THE TRANSFER, DISPENSE AND
MEASUREMENT OF LUBRICANTS, FUELS AND LIQUIDS, WITH THE
HIGHEST CONSIDERATION FOR HUMAN AND ENVIRONMENTAL
HEALTH.*



*PIUSI S.p.A.
Headquarters
46029 Suzzara (Mantova) Italy
tel.+39 0376 534561
fax.+39 0376 536393
e-mail: piusi@piusi.com
www.piusi.com*



*PIUSI USA, Inc.
3901 Anglers Avenue
Fort Lauderdale, FL 33312
tel.: 954 584 1552
fax.: 954 584 1554
Email: sales.usa@piusi.com
www.piusi.com/usa*