



BAIKAKAJI GROUP

Product Name:	2622 Water	Product Code:	2622W	Drawing Number:	
Colour:	DARK BLUE	PSS	BAI-004	Shade:	As per approved shade card

Material Details


Base Material	Material Code	Supplier	MB %	MB Code	Supplier
HDPE	M5005L	HALDIA	1		POOJA PACKAGING
	M6007L	HALDIA	1	CCA 26061	CAPITAL


Dimension


Parameter	Specification	Parameter	Specification	Parameter	Specification
Height	12.3 ± 0.3 mm	Knurl Dia	27.5 ± 0.3 mm	Cell Top Thickness	0.5 ± 0.1 mm
Liner Top Thickness	N/A	Thread Dia	24.65 ± 0.15 mm	Bore Plug Height	5.1 ± 0.1 mm
Bore Plug Dia	22.3 ± 0.15 mm	Cell Weight	N/A	Liner Weight	N/A
Closure Weight	1.2 ± 0.1 grm	Top Flatness	N/A	Slitting Height	10.0 to 10.1 mm
No. Of Bridge	10	Bridge Strength	5 to 8 Kgs	Applied Torque	10 to 14 In-lbs
Opening Torque	5 to 8 In-lbs	Bridge Breaking Torque	5 to 7 In-lbs		

Packing Std.

Parameter	Specification	Parameter	Specification	Parameter	Specification
Box Length	600 mm	Box Height	410 mm	Box Width	380 mm
No. of ply	5	Min. BS	11 Kgs	Min. CS	350 Kg
Empty Box Weight	1.3 Kgs	Liner bag Length	40 inch	Liner Bag Width	28 inch
Flap Width	5 inch	Liner Bag Thickness	51 micron	Liner Bag Weight	90 grm (min)
Closure per Box	9500 Pcs				

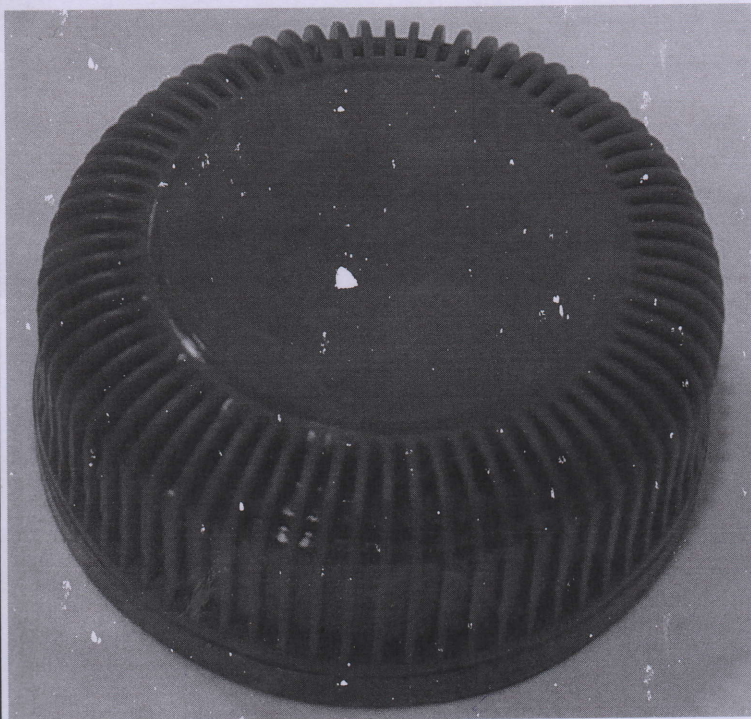

Prepared By: 

Approved By: 

Product Name:	2622 CSD	Product Code:	2622CSD	Drawing Number:	12451718
Colour:	DARK BLUE	PSS	BAI-006	Shade:	As per approved shade card

Material Details



Base Material	Material Code	Supplier	MB %	MB Code	Supplier
HDPE	M5005L	HALDIA	1		POOJA PACKAGING
	M6007L	HALDIA	1	CCA 26061	CAPITAL

Dimension

Parameter	Specification	Parameter	Specification	Parameter	Specification
Height	14.05 ± 0.3 mm	Knurl Dia	28.5 ± 0.2 mm	Cell Top Thickness	0.9 ± 0.1 mm
Liner Top Thickness	N/A	Thread Dia	24.8 ± 0.2 mm	Bore Plug Height	4.5 ± 0.1 mm
Bore Plug Dia	22.5 ± 0.15 mm	Cell Weight	N/A	Liner Weight	N/A
Closure Weight	1.6 ± 0.1 gm	Top Flatness	N/A	Slitting Height	10.6 to 10.8 mm
No. Of Bridge	12	Bridge Strength	8 to 12 Kgs	Applied Torque	10 to 14 In-lbs
Opening Torque	5 to 8 In-lbs	Bridge Breaking Torque	5 to 7 In-lbs		

Packing Std.

Parameter	Specification	Parameter	Specification	Parameter	Specification
Box Length	600 mm	Box Height	410 mm	Box Width	380 mm
No. of ply	5	Min. BS	11 Kgs	Min. CS	350 Kgf
Empty Box Weight	1.3 Kgs	Liner bag Length	40 inch	Liner Bag Width	28 inch
Flap Width	5 inch	Liner Bag Thickness	51 micron	Liner Bag Weight	90 grm (min)
Closure per Box	9000 Pcs				

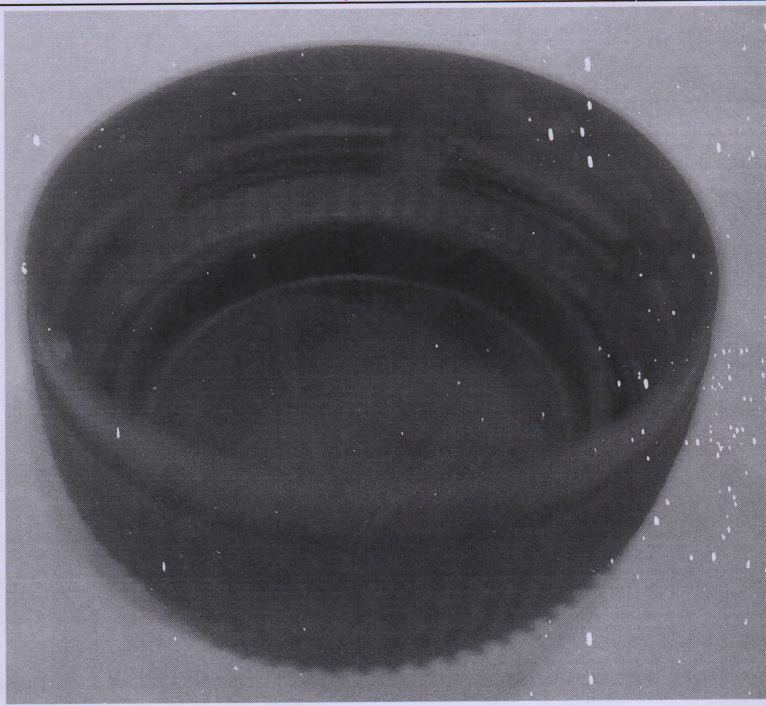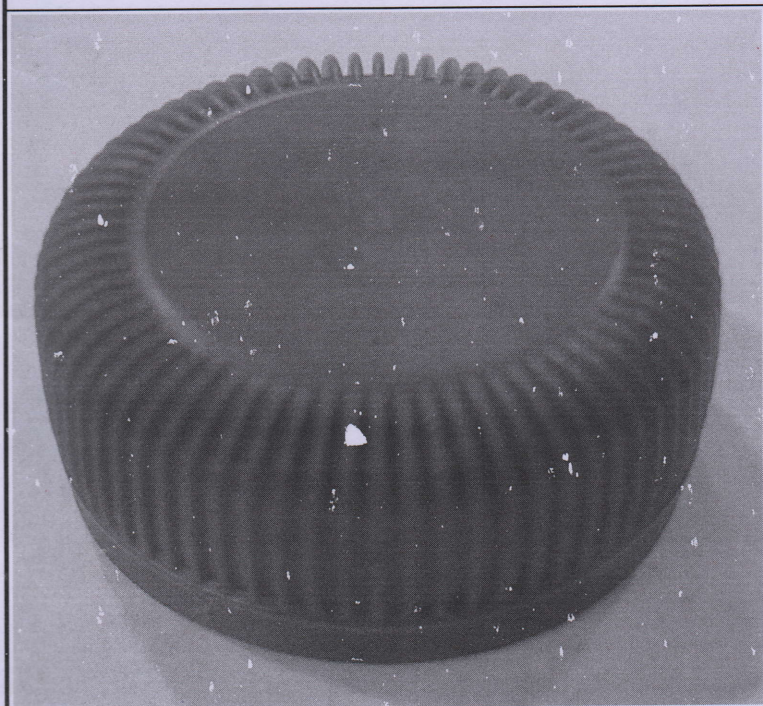

Prepared By:

[Signature]

Approved By:

[Signature]

Product Name:	27mm Alaska Water	Product Code:	AB27W	Drawing Number:	-
Colour:	DENIM BLUE	PSS	BAI-007	Shade:	As per approved shade card

Material Details



Base Material	Material Code	Supplier	MB %	MB Code	Supplier
HDPE	M5002L	HALDIA	1.7	DENIM BLUE	POOJA PACKAGING
	ACP 5331H	BASELL			
	MB7581	BOROUGE			
	54GC016	RELIANCE			

Dimension

Parameter	Specification	Parameter	Specification	Parameter	Specification
Height	13.7 ± 0.3 mm	Knurl Dia	28.5 ± 0.3 mm	Cell Top Thickness	0.45 ± 0.1 mm
Liner Top Thickness	N/A	Thread Dia	25.6 ± 0.15 mm	Bore Plug Height	3.7 ± 0.1 mm
Bore Plug Dia	22.2 ± 0.15 mm	Cell Weight	N/A	Liner Weight	N/A
Closure Weight	1.20 ± 0.1 grm	Top Flatness	N/A	Slitting Height	10.3 to 10.5 mm
No. Of Bridge	8	Bridge Strength	5 to 8 Kgs	Applied Torque	10 to 14 In-lbs
Opening Torque	5 to 8 In-lbs	Bridge Breaking Torque	3 to 5 In-lbs		

Packing Std.

Parameter	Specification	Parameter	Specification	Parameter	Specification
Box Length	600 mm	Box Height	410 mm	Box Width	380 mm
No. of ply	5	Min. BS	11 Kgs	Min. CS	350 Kgf
Empty Box Weight	1.3 Kgs	Liner bag Length	40 inch	Liner Bag Width	28 inch
Flap Width	5 inch	Liner Bag Thickness	51 micron	Liner Bag Weight	90 grm (min)
Closure per Box	6000 Pcs				

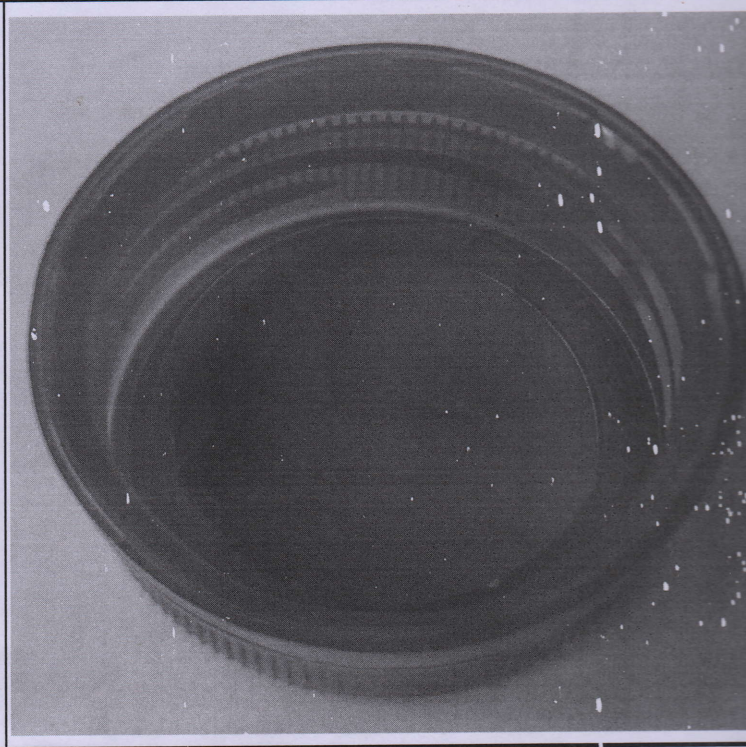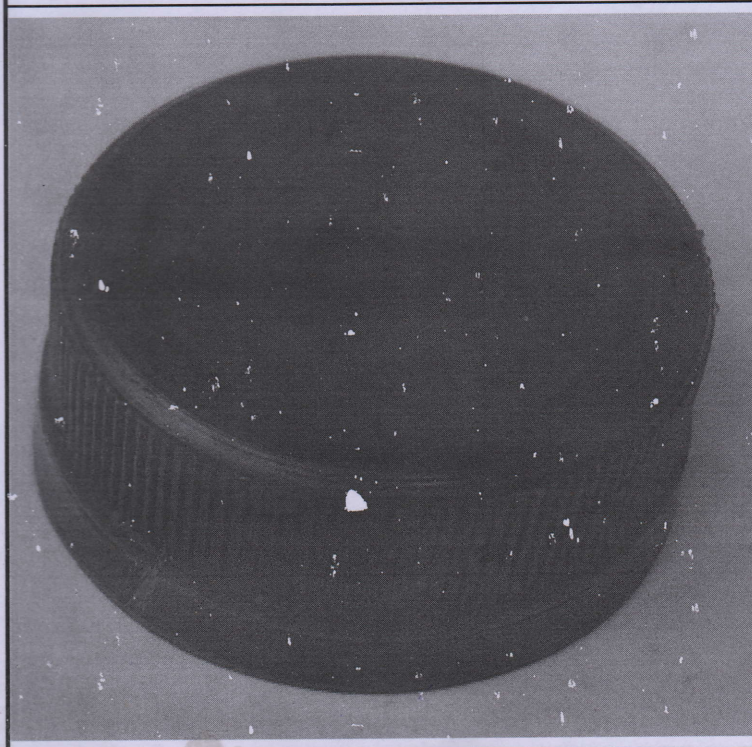

Prepared By:

[Signature]

Approved By:

[Signature]



BAIKAKAJI GROUP

Product Name:	28mm CSD 1 Pcs	Product Code:	BAI-1881-CSD-001	Drawing Number:	MACM20151115-01
Colour:	Red	PSS-002		Shade:	As per approved shade card

Material Details


Base Material	Material Code	Supplier	MB %	MB Code	Supplier
HDPE	MB 6562	BOROUGE	1	TET4NA036 S-RED	TOYO INKS
HDPE	MB 5569	BOROUGE	1	PE33001371-ZN/S	CLARIENT
			1	CCA 22076	CAPITAL COLOURS
			1.2		POOJA PACKAGING


Dimension


Parameter	Specification	Parameter	Specification	Parameter	Specification
Height	16.00 $\pm$ 0.3 mm	Knurl Dia	29.7 $\pm$ 0.3 mm	Cell Top Thickness	1.25 $\pm$ 0.1 mm
Liner Top Thickness	N/A	Thread Dia	25.7 $\pm$ 0.2 mm	Bore Plug Height	3.5 $\pm$ 0.1 mm
Bore Plug Dia	22.4 $\pm$ 0.2 mm	Cell Weight	N/A	Liner Weight	N/A
Closure Weight	2.30 $\pm$ 0.1 gm	Top Flatness	-0.35 ~ -0.15 mm	Slitting Height	12.4 to 12.5 mm
No. Of Bridge	10	Bridge Strength	10 to 12 Kgs	Applied Torque	15 to 18 In-lbs
Opening Torque	10 to 14 In-lbs	Bridge Breaking Torque	5 to 7 In-lbs		

Packing Std.

Parameter	Specification	Parameter	Specification	Parameter	Specification
Box Length	600 mm	Box Height	410 mm	Box Width	380 mm
No. of ply	5	Min. BS	11 Kgs	Min. CS	350 Kgf
Empty Box Weight	1.3 Kgs	Liner bag Length	40 inch	Liner Bag Width	28 inch
Flap Width	5 inch	Liner Bag Thickness	51 micron	Liner Bag Weight	90 gm (min)
Closure per Box	5500 Pcs				

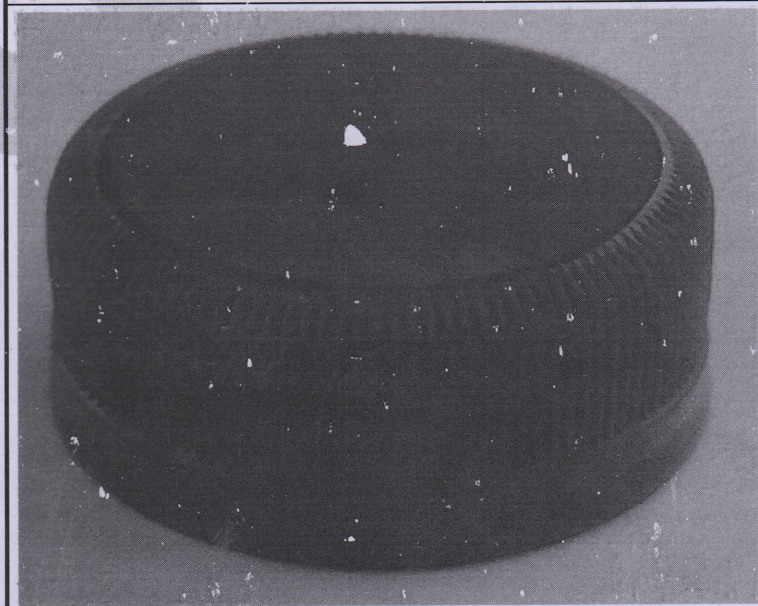

Prepared By: 

Approved By: 

BAI-KAKAJI
GROUPBAIKAKAJI GROUP

Product Name:	28mm CSD 2 Pcs	Product Code:	PC1881	Drawing Number:	MACM20130716-01 / UCM00198733
Colour:	White	PSS	BAI-001	Shade:	As per approved shade card

Material Details



Base Material	Material Code	Supplier	MB %	MB Code	Supplier
PP	BD 950MO	BOROUGE	1	TET1NA026	TOYO INKS
	EP 545 L	BASELL	1	PE04407082-ZN/S	CLARIENT
LINER	6442 HAG-AL (grey)	WR GRACE	1.8	CCA2035D	CAPITAL
	EPW 201 PL-1010	SRISOL	1.8	MP001	POOJA PACKAGING
	Actega 582	ACTIGA			

Dimension

Parameter	Specification	Parameter	Specification	Parameter	Specification
Height	16.6 ± 0.3 mm	Knurl Dia	29.7 ± 0.3 mm	Cell Top Thickness	1.4 ± 0.1 mm
Liner Thickness	0.2 ± 0.05 mm	Thread Dia	25.8 ± 0.15 mm	Bore Plug Height	N/A
Bore Plug Dia	N/A	Cell Weight	2.35 ± 0.1 mg	Liner Weight	0.235 ± 0.01 mg
Closure Weight	2.60 ± 0.1 mg	Top Flatness	-0.45 ~ -0.15 mm	Slitting Height	12.8 to 12.9 mm
No. Of Bridge	10	Bridge Strength	12 to 17 Kgs	Applied Torque	15 to 18 In-lbs
Opening Torque	10 to 14 In-lbs	Bridge Breaking Torque	6 to 9 In-lbs		

Packing Std.

Parameter	Specification	Parameter	Specification	Parameter	Specification
Box Length	600 mm	Box Height	410 mm	Box Width	380 mm
No. of ply	5	Min. BS	11 Kgs	Min. CS	350 Kgf
Empty Box Weight	1.3 Kgs	Liner bag Length	40 inch	Liner Bag Width	28 inch
Flap Width	5 inch	Liner Bag Thickness	51 micron	Liner Bag Weight	90 grm (min)
Closure per Box	5500 Pcs				

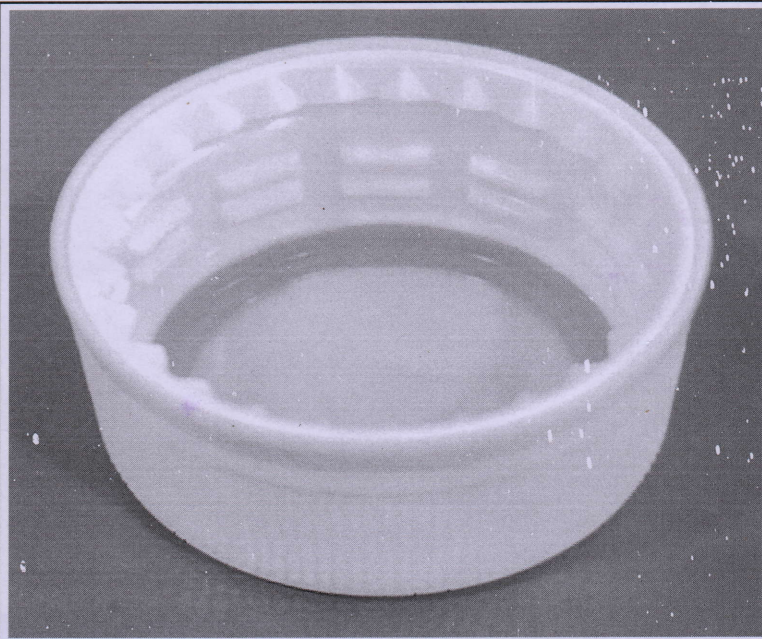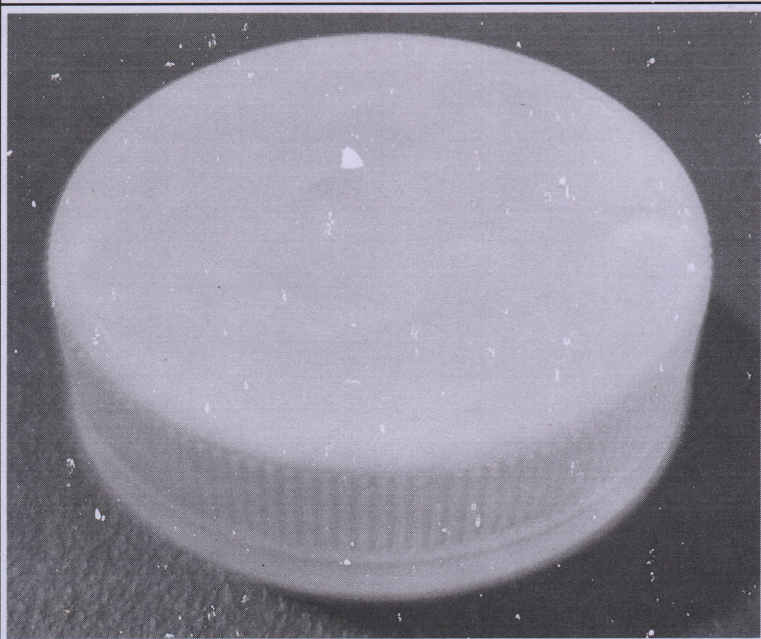

Prepared By:

Approved By:

Product Name:	27mm Alaska Water (IRCTC)	Product Code:	AB27W	Drawing Number:	UCM001A8177
Colour:	DENIM BLUE	PSS	BAI-003	Shade:	As per approved shade card

Material Details

Base Material	Material Code	Supplier	MB %	MB Code	Supplier
HDPE	M5002L	HALDIA	1.7	DENIM BLUE	POOJA PACKAGING


Dimension


Parameter	Specification	Parameter	Specification	Parameter	Specification
Height	14.4 ± 0.3 mm	Knurl Dia	28.9 ± 0.3 mm	Cell Top Thickness	0.9 ± 0.1 mm
Liner Top Thickness	N/A	Thread Dia	25.6 ± 0.15 mm	Bore Plug Height	3.7 ± 0.1 mm
Bore Plug Dia	22.2 ± 0.15 mm	Cell Weight	N/A	Liner Weight	N/A
Closure Weight	1.65 ± 0.1 gm	Top Flatness	N/A	Slitting Height	10.4 to 10.5 mm
No. Of Bridge	8	Bridge Strength	5 to 8 Kgs	Applied Torque	10 to 14 In-lbs
Opening Torque	5 to 8 In-lbs	Bridge Breaking Torque	3 to 5 In-lbs		

Packing Std.

Parameter	Specification	Parameter	Specification	Parameter	Specification
Box Length	600 mm	Box Height	410 mm	Box Width	380 mm
No. of ply	5	Min. BS	11 Kgs	Min. CS	350 Kgf
Empty Box Weight	1.3 Kgs	Liner bag Length	40 inch	Liner Bag Width	28 inch
Flap Width	5 inch	Liner Bag Thickness	51 micron	Liner Bag Weight	90 gm (min)
Closure per Box	6000 Pcs				



Prepared By: 

Approved By: 

Product Name:	27mm Alaska Water	Product Code:	A27W4	Drawing Number:	UCM001A8449
Colour:	DENIM BLUE	PSS	BAI-004	Shade:	As per approved shade card

Material Details



Base Material	Material Code	Supplier	MB %	MB Code	Supplier
HDPE	M5002L	HALDIA	1.7	DENIM BLUE	POOJA PACKAGING
	ACP 5331H	BASELL			
	MB7581	BOROUGE			
	54GC016	RELIANCE			

Dimension

Parameter	Specification	Parameter	Specification	Parameter	Specification
Height	14.2 ± 0.3 mm	Knurl Dia	28.5 ± 0.3 mm	Cell Top Thickness	0.45 ± 0.1 mm
Liner Top Thickness	N/A	Thread Dia	25.6 ± 0.15 mm	Bore Plug Height	3.7 ± 0.1 mm
Bore Plug Dia	22.2 ± 0.15 mm	Cell Weight	N/A	Liner Weight	N/A
Closure Weight	1.30 ± 0.1 gm	Top Flatness	N/A	Slitting Height	10.3 to 10.5 mm
No. Of Bridge	8	Bridge Strength	5 to 8 Kgs	Applied Torque	10 to 14 In-lbs
Opening Torque	5 to 8 In-lbs	Bridge Breaking Torque	3 to 5 In-lbs		

Packing Std.

Parameter	Specification	Parameter	Specification	Parameter	Specification
Box Length	600 mm	Box Height	410 mm	Box Width	380 mm
No. of ply	5	Min. BS	11 Kgs	Min. CS	350 Kg
Empty Box Weight	1.3 Kgs	Liner bag Length	40 inch	Liner Bag Width	28 inch
Flap Width	5 inch	Liner Bag Thickness	51 micron	Liner Bag Weight	90 gm (min)
Closure per Box	6000 Pcs				

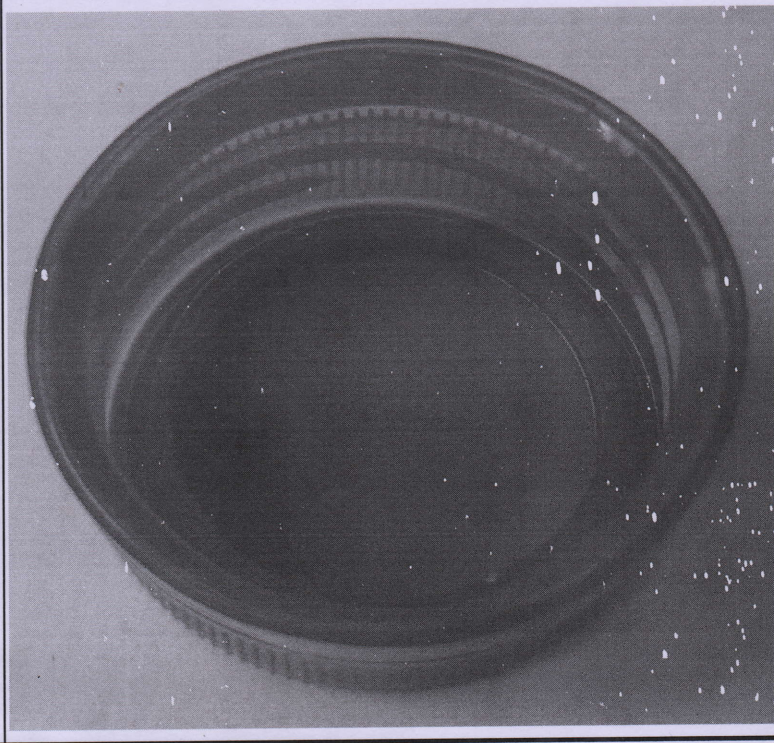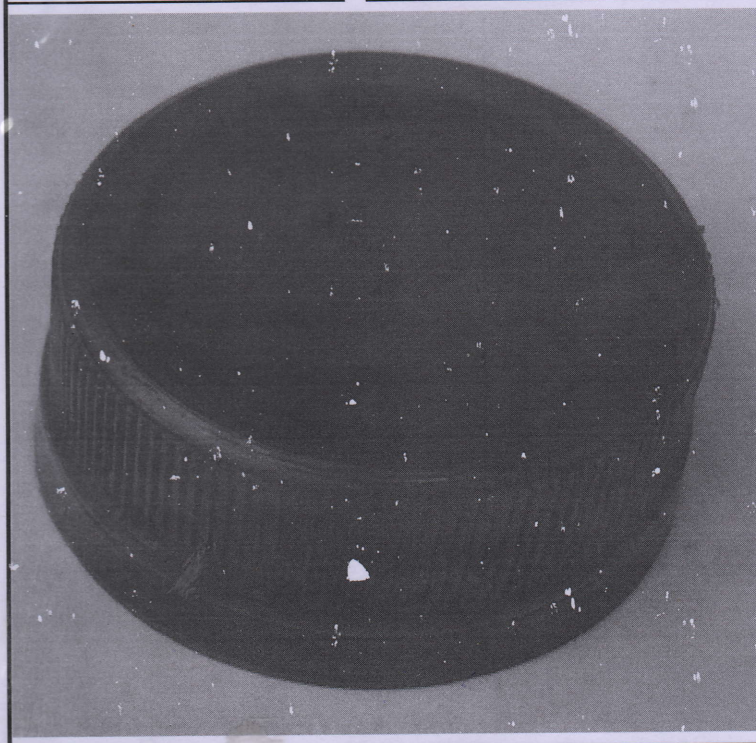

Prepared By:

[Signature]

Approved By:

[Signature]