

HIDR WEBSITE

COMPLETE LOAD & PERFORMANCE TESTING

REPORT

Apache JMeter 5.6.3 | HTTPS | Public Website Performance Assessment

Application	HIDR Website
Target	https://hidr.com.np/
Testing Type	Load / Performance Testing
Tool	Apache JMeter 5.6.3
Observed Load	800 users/threads indicated in execution evidence
Samples	1,600 per endpoint; 4,800 represented
Endpoints	/about, /our-team, /gallery

1. Executive Summary

The supplied Apache JMeter evidence evaluates /about, /our-team and /gallery. Each endpoint contains 1,600 samples, representing 4,800 samples across the three displayed result sets. The execution evidence indicates 800 JMeter users/threads.

The sample-count-weighted average response time is approximately 32.02 seconds and the weighted error rate is approximately 4.83%. These aggregate values combine separate endpoint summaries and should therefore be treated as indicative rather than a single mixed-workload transaction result.

Overall assessment: NOT READY FOR PERFORMANCE ACCEPTANCE at the observed load, based on the supplied evidence.

2. Test Objectives

Measure response-time behavior, errors, throughput and variability under load.

Identify unstable endpoints and establish a baseline for optimization and retesting.

3. Test Scope

In scope: /about, /our-team and /gallery.

Out of scope: authenticated workflows, database-level benchmarking, browser rendering metrics and infrastructure telemetry not included in the supplied evidence.

4. Test Environment and Configuration

Target: hydr.com.np | Protocol: HTTPS | Method: GET | Tool: Apache JMeter 5.6.3.

Follow Redirects and Use KeepAlive are enabled in the displayed HTTP Request configurations.

The screenshots do not establish exact ramp-up, loop count, duration, timers, timeout settings, assertions, client resources or server infrastructure.

5. Workload Model and Execution

The JMeter evidence shows an execution indicator of 800/800 and 1,600 samples per endpoint. The exact loop/ramp-up configuration cannot be conclusively determined from screenshots alone.

The displayed test plan uses HTTP GET requests with Summary Report, View Results Tree and View Results in Table listeners.

6. Test Scenarios

ID	Endpoint	Method	Load	Samples
LT-001	/about	GET	800	1600
LT-002	/our-team	GET	800	1600
LT-003	/gallery	GET	800	1600

7. Performance Metrics

Average response time: mean request completion time.

Minimum response time: fastest recorded sample; the displayed 0 ms should be validated against individual samples.

Maximum response time: slowest sample and a key tail-latency indicator.

Standard deviation: response-time variability.

Error percentage: percentage of failed samples according to JMeter.

Throughput: requests processed per unit time.

Received/Sent KB/sec: client-side data transfer rates.

8. Detailed Results

Endpoint	Samples	Avg s	Min ms	Max s	Std s	Error %	Throughput/min
/about	1600	55.54	0	4482.64	355.37	9.75	21.4
/our-team	1600	31.24	0	4464.58	295.15	2.50	21.4
/gallery	1600	9.27	0	332.31	26.72	2.25	21.4


9. Endpoint Analysis



/about: 55.54 seconds average, 4,482.64 seconds maximum, 355.37 seconds standard deviation and 9.75% errors. Critical priority.

/our-team: 31.24 seconds average, 4,464.58 seconds maximum, 295.15 seconds standard deviation and 2.50% errors. High risk.

/gallery: 9.27 seconds average, 332.31 seconds maximum, 26.72 seconds standard deviation and 2.25% errors. Best of the three, but still requires optimization.

10. Comparative Analysis

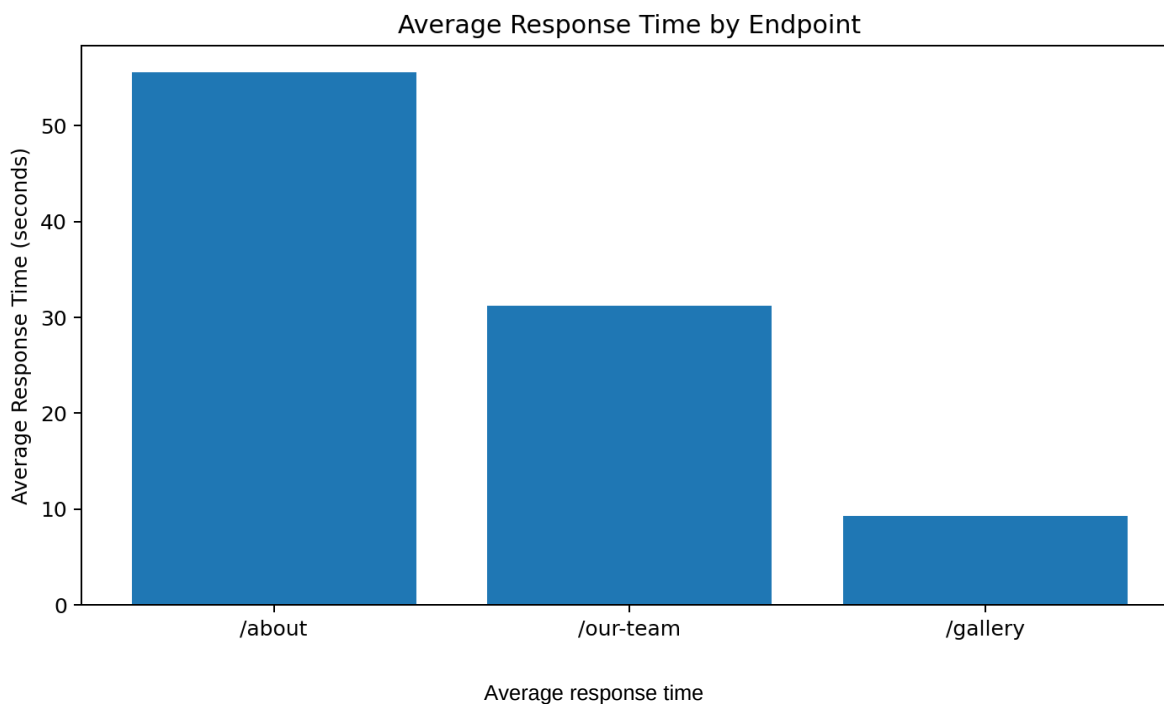

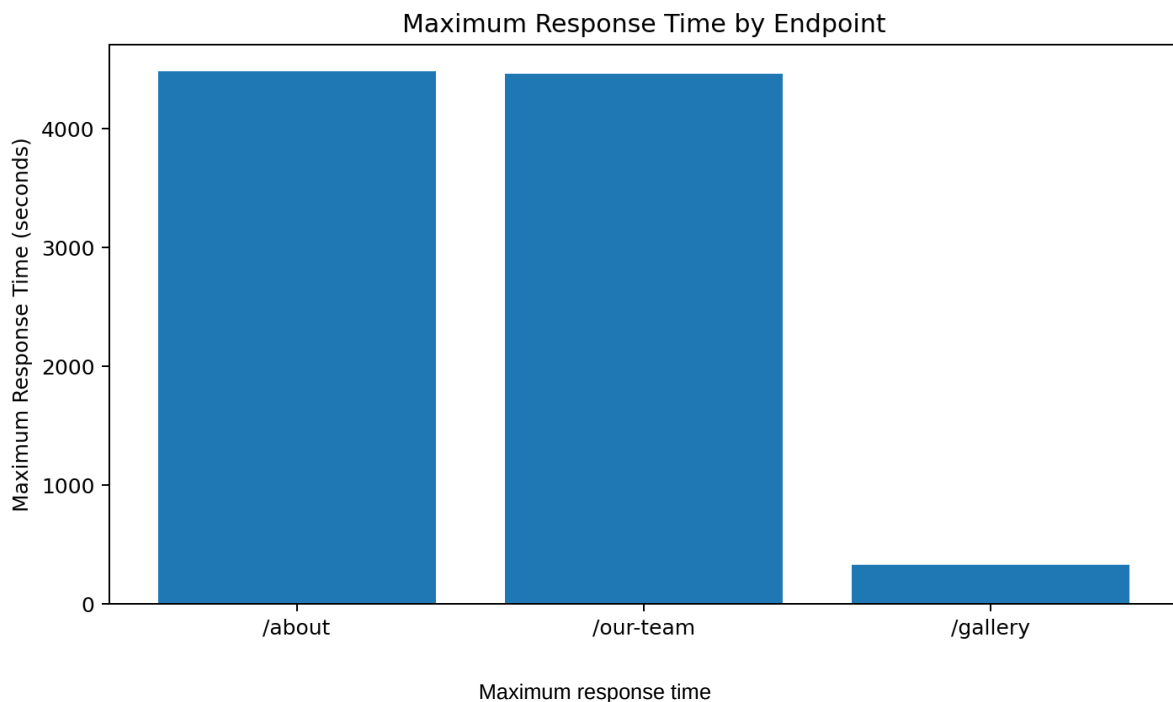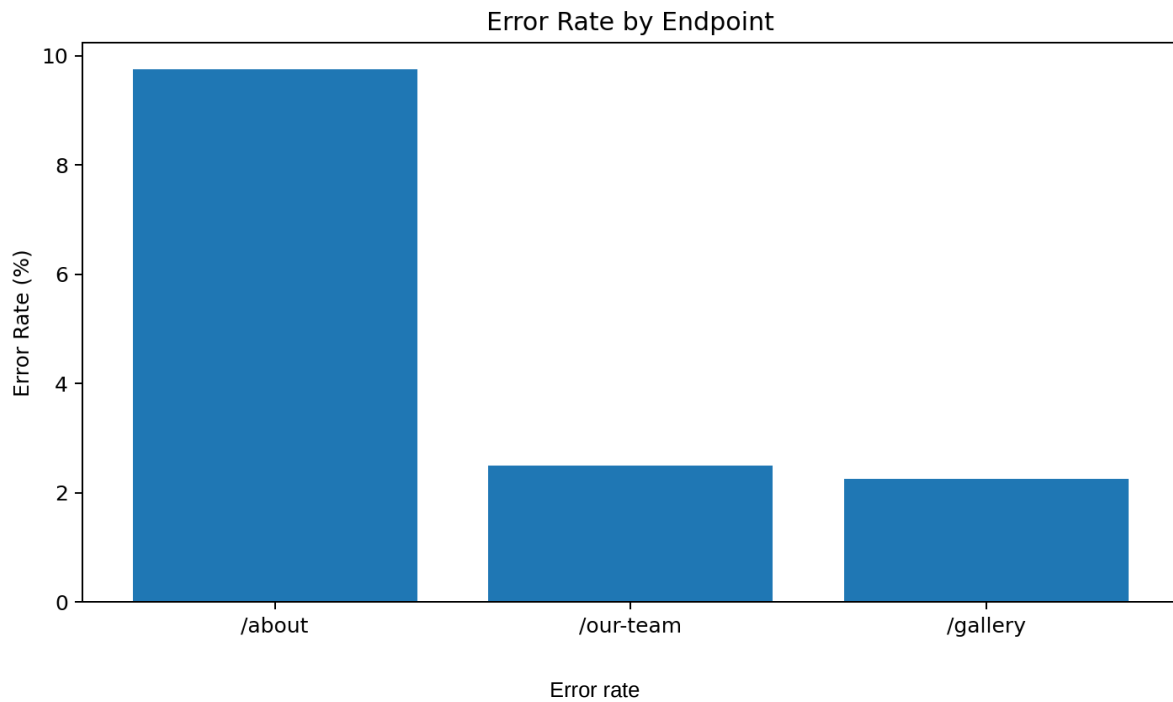

11. Error and Stability Analysis

The displayed error rates are significant: 9.75% for /about, 2.50% for /our-team and 2.25% for /gallery.

Failed samples should be isolated in View Results Tree and correlated with web-server, application, database and upstream-service logs.

The very large maximum response times indicate extreme tail latency and should be investigated for timeouts, blocked workers, slow database operations, external dependencies and infrastructure saturation.

The displayed minimum of 0 ms should be validated against individual samples before it is used as a KPI.

12. Risk Assessment

Critical: extreme latency on /about and /our-team.

Critical: 9.75% error rate on /about.

High: /gallery remains slow and has a 2.25% error rate.

Medium: root cause cannot be isolated without server-side telemetry.

13. Recommendations

Investigate failed requests and server/application logs first.

Profile backend, database and external service calls for /about and /our-team.

Optimize gallery image delivery, compression, caching and CDN/object storage.

Review caching, web-worker limits, connection pools, proxy settings and timeouts.

Run staged concurrency tests and capture CPU, memory, database and network telemetry.

Add HTTP status/content assertions and run repeatable JMeter CLI-mode tests.

14. Suggested Acceptance Criteria

Error rate $\leq 1\%$ under agreed normal load unless the project defines another threshold.

Define endpoint-specific average, p95 and p99 response-time targets.

No unexplained multi-minute tail-latency events.

Expected HTTP status and content must be returned for critical requests.

Infrastructure utilization must remain within agreed safe operating limits.

15. Retest Strategy

Execute staged loads: 100 → 200 → 400 → 600 → 800 users/threads.

Document ramp-up, duration, loops, timers and think time.

Collect JTL results plus CPU, RAM, database, network and application telemetry.

Compare average, p95, p99, maximum, throughput and error rate before and after optimization.

16. Limitations and Assumptions

This report is based on screenshots rather than the original JMX file.

Percentile metrics were not supplied.

Infrastructure metrics and exact execution parameters were not supplied.

Aggregate calculations are indicative because the endpoint summaries appear to be separate runs.

17. Final Conclusion

HIDR shows significant performance risk at the observed load. /about is the highest-priority concern, followed by /our-team. /gallery is comparatively better but remains slow.

Root-cause analysis and optimization should be completed before a higher-load or production-readiness decision is made.

Overall result: NOT READY FOR PERFORMANCE ACCEPTANCE at the observed load, based on the supplied evidence.

Appendix A – JMeter Evidence Screenshots

A1. /about HTTP Request configuration

Load Testing for HIDR.jmx (C:\Users\DELL\OneDrive\Desktop\apache-jmeter-5.6.3\bin\Load Testing for HIDR.jmx) - Apache JMeter (5.6.3)

File Edit Search Run Options Tools Help

01:14:43 0 0/800

Load Testing for HIDR

- Users
 - HTTP Request
 - View Results Tree
 - Summary Report
 - View Results in Table
 - HTTP Request
 - View Results Tree
 - Summary Report
 - View Results in Table
 - HTTP Request
 - View Results Tree
 - Summary Report
 - View Results in Table
 - HTTP Request
 - View Results Tree
 - Summary Report
 - View Results in Table
 - HTTP Request
 - View Results Tree
 - Summary Report
 - View Results in Table
 - HTTP Request
 - View Results Tree
 - Summary Report
 - View Results in Table

HTTP Request

Name: HTTP Request

Comments:

Basic Advanced

Web Server

Protocol (http): https Server Name or IP: hidr.com.np Port Number:

HTTP Request

GET Path: /about Content encoding:

☐ Redirect Automatically ☒ Follow Redirects ☒ Use KeepAlive ☐ Use multipart/form-data ☐ Browser-compatible headers

Parameters Body Data Files Upload

Send Parameters With the Request:

Name	Value	URL Encode?	Content-Type	Include Equals?
------	-------	-------------	--------------	-----------------

Detail Add Add from Clipboard Delete Up Down

A2. /about Summary Report

Load Testing for HIDR

- Users
 - HTTP Request
 - View Results Tree
 - Summary Report
 - View Results in Table
 - HTTP Request
 - View Results Tree
 - Summary Report
 - View Results in Table
 - HTTP Request
 - View Results Tree
 - Summary Report
 - View Results in Table

Summary Report

Name: Summary Report

Comments:

Write results to file / Read from file

Filename Browse... Log/Display Only: ☐ Errors ☐ Successes Configure

Label	# Samples	Average	Min	Max	Std. Dev.	Error %	Throughput	Received K...	Sent KB/sec	Avg. Bytes
HTTP Reque...	1600	55544	0	4482637	355370.63	9.75%	21.4/min	12.65	0.04	36284.4
TOTAL	1600	55544	0	4482637	355370.63	9.75%	21.4/min	12.65	0.04	36284.4

A3. /our-team HTTP Request configuration

HTTP Request

Name: HTTP Request

Comments:

Basic

Advanced

Web Server

Protocol [http]: https

Server Name or IP: hidr.com.np

Port Number:

HTTP Request

GET

Path: /our-team

Content encoding:

☐ Redirect Automatically

☒ Follow Redirects

☒ Use KeepAlive

☐ Use multipart/form-data

☐ Browser-compatible headers

Parameters

Body Data

Files Upload

Send Parameters With the Request:

Name:	Value	URL Encode?	Content-Type	Include Equals?
-------	-------	-------------	--------------	-----------------

A4. /our-team Summary Report

Filename

Browse...

Log/Display Only:

☐ Errors

☐ Successes

Configure

Label	# Samples	Average	Min	Max	Std. Dev.	Error %	Throughput	Received K...	Sent KB/sec	Avg. Bytes
HTTP Reque...	1600	31240	0	4464584	295151.44	2.50%	21.4/min	13.05	0.04	37411.9
TOTAL	1600	31240	0	4464584	295151.44	2.50%	21.4/min	13.05	0.04	37411.9

A5. /gallery HTTP Request configuration

HTTP Request

Name:	HTTP Request
Comments:	

Basic Advanced

• Web Server

Protocol [http]: Server Name or IP: Port Number:

• HTTP Request

Path: Content encoding:

☐ Redirect Automatically ☒ Follow Redirects ☒ Use KeepAlive ☐ Use multipart/form-data ☐ Browser-compatible headers

Parameters Body Data Files Upload

Send Parameters With the Request:

Name:	Value	URL Encode?	Content-Type	Include Equals?
-------	-------	-------------	--------------	-----------------

A6. /gallery Summary Report

· Write results to file / Read from file

Filename Log/Display Only: ☐ Errors ☐ Successes

[illegible]

Appendix B – Calculated Summary

Total represented samples: 4,800.

Sample-count-weighted average response time: 32.02 seconds.

Sample-count-weighted error rate: 4.83%.