

How to Reset Password on SADP

Tool:


Please follow the link:

<https://www.hikvision.com/en/support/tools/hitools/clea8b3e4ea7da90a9/>

to download the latest version of SADP on your computer.


NOTE: The Hikvision device and the computer which installed SADP should be in the same subnet.

Open SADP Tool to search online devices. Select the device and click **Forget Password**:

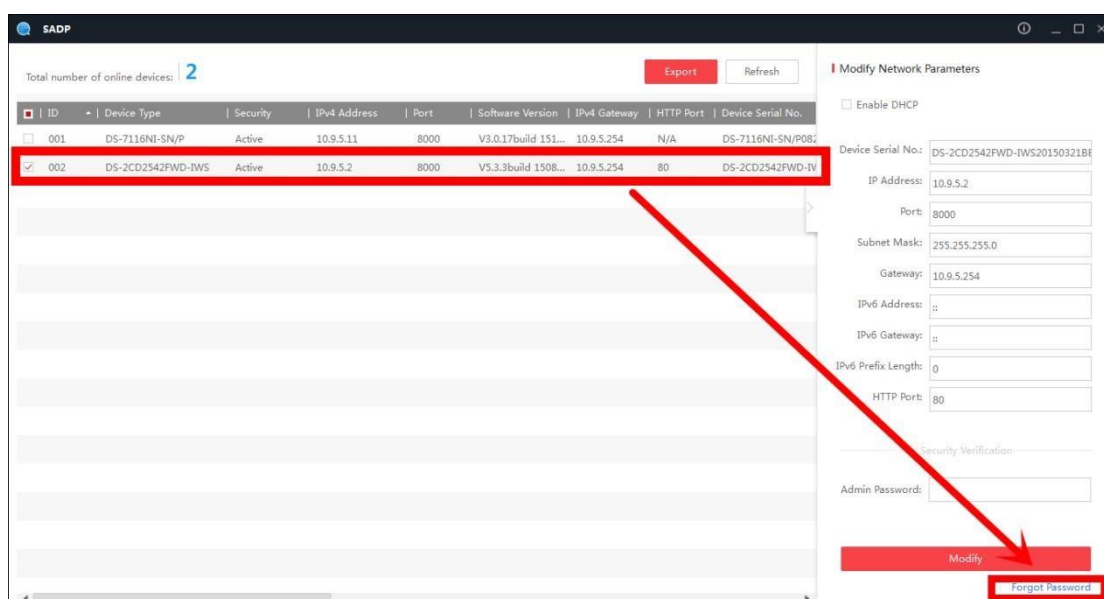

You might see one of the three pop-ups.

1. If the pop-up requires a security code, please turn to **method 1**.

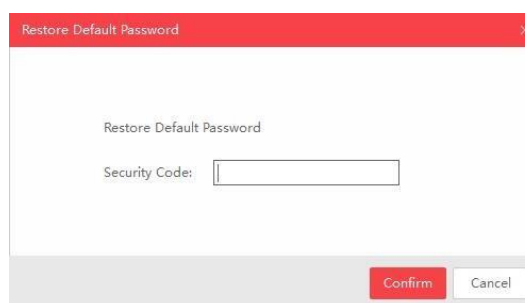

2. If the pop-up requires encrypted file, please turn to **method 2**.

The screenshot shows a 'Reset Password' dialog box with a red header and a close button. It contains two steps: Step 1 (Export) and Step 2 (Input key or import file). Step 1 includes an 'Export' button. Step 2 includes a radio button for 'Import File', a file selection input, and password fields for 'New Password' and 'Confirm Password'. At the bottom are 'Confirm' and 'Cancel' buttons.

Reset Password

1 Step 1: Click Export to download the key request file (XML file) or take a photo of the QR code. Send the XML file or QR code photo to our technical engineers.

Export

2 Step 2: Input the key or import the key file received from the technical engineer to reset the password for the device.

☒ Import File

New Password:

Confirm Password:

Confirm Cancel

3. If the pop-up requires encrypted file or key, please turn to **method 2 or 3**.

This screenshot is similar to the previous one but includes a QR code in the top right corner of the dialog box. In Step 2, the 'Input Key' radio button is selected instead of 'Import File'. There is also a checkbox for 'Reset Network Cameras' Passwords' at the bottom.

Reset Password

1 Step 1: Click Export to download the key request file (XML file) or take a photo of the QR code. Send the XML file or QR code photo to our technical engineers.

Export

2 Step 2: Input the key or import the key file received from the technical engineer to reset the password for the device.

☒ Input Key ☐ Import File

New Password:

Confirm Password:

☐ Reset Network Cameras' Passwords

Confirm Cancel

Method 1, Device Information

Copy **Start Time** and **Device Serial No.**, then send the information to Hikvision technical support team, support team would send back security codes.




Note: Please reboot the device to check the **Start Time**.

After receiving security codes, please choose one code according to **device's current time**.


```
2015-11-27:RRrezeSezz  
2015-11-28:RzzSRrRyzd  
2015-11-29:zQeqz9yee  
2015-11-30:qQRzed9ezR  
2015-12-01:qe9ryzRQdy
```

Input security code then click **Confirm**.

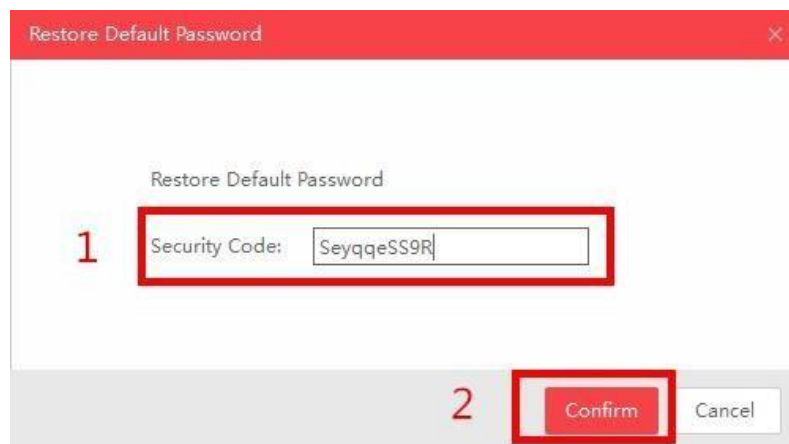


Method 2, XML File

Click **Export** button to save xml file, then send the XML file to Hikvision technical support team.

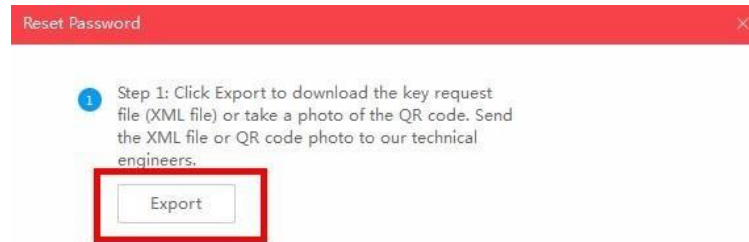

Hikvision technical support team will send the encrypted file back. Choose the path of the encrypted file, input your new password and confirm, click **Confirm** to reset password.

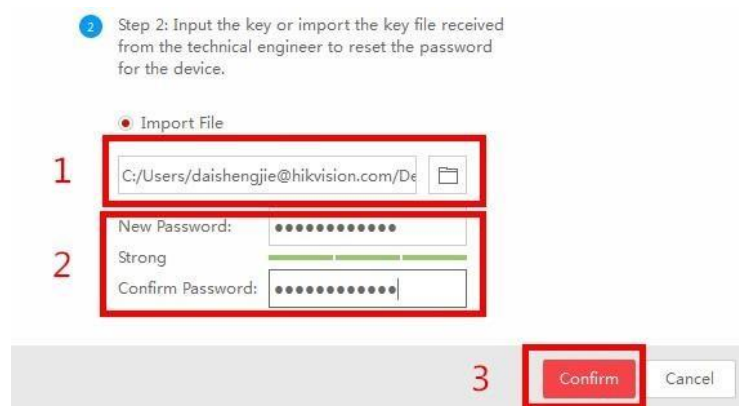

Note: The encrypted file would be valid for 48 hours.

Method 3, QR CODE

With this method you can export the XML file or take a screenshot of QR code.

If you export the XML file, please refer to method 2 to reset password.

You can also send the screenshot of QR code to Hikvision technical support team.



Hikvision technical support team will send back the key consists of numbers and letters (8 bytes).

Input the key, type in the new password and confirm. Click **Confirm** to reset password.

2 Step 2: Input the key or import the key file received from the technical engineer to reset the password for the device.

☒ Input Key ☐ Import File

1

2 New Password:
Strong
Confirm Password:

note ☒ Reset Network Cameras' Passwords

3

Note: If you want to reset the password of NVR and connected cameras simultaneously, please choose “Reset Network Cameras’ Passwords” option.

First Choice for Security Professionals

***HIK*VISION Technical Support**