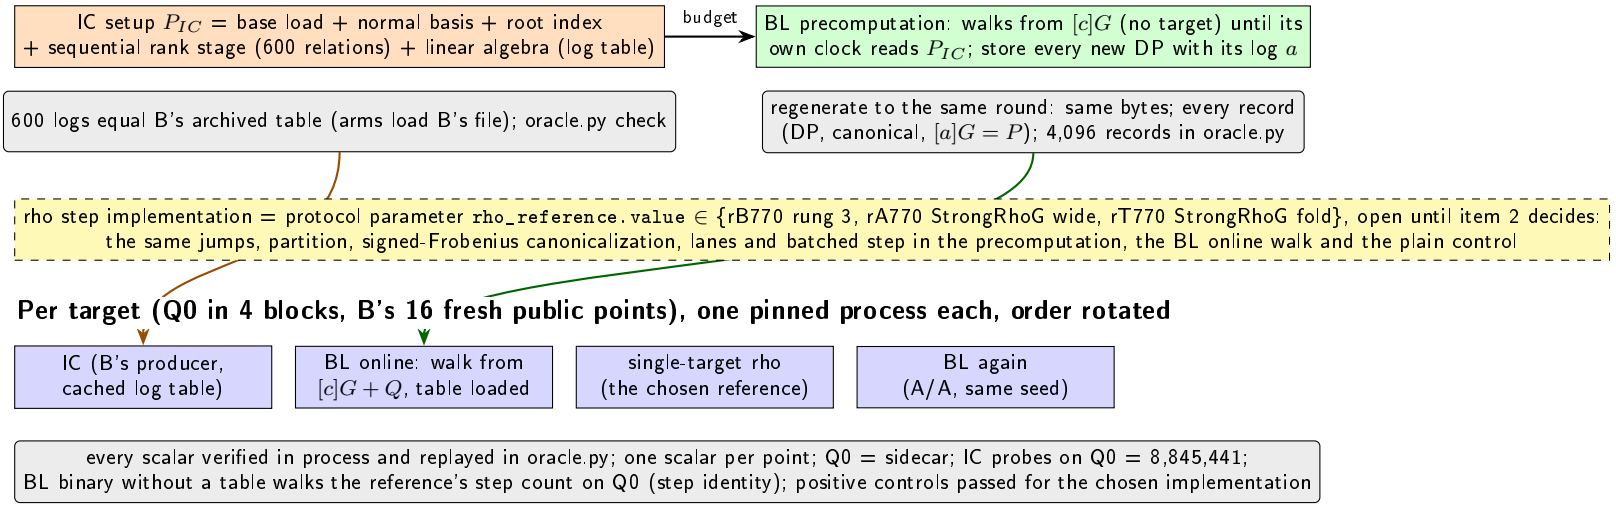

Once per job, on the execution CPU (one thread): the two setups, matched in wall milliseconds
IC setup P_{IC} = base load + normal basis + root index
+ sequential rank stage (600 relations) + linear algebra (log table)
budget
BL precomputation: walks from $[c]G$ (no target) until its own clock reads P_{IC}; store every new DP with its log a
600 logs equal B's archived table (arms load B's file); oracle.py check
regenerate to the same round: same bytes; every record (DP, canonical, $[a]G = P$); 4,096 records in oracle.py
rho step implementation = protocol parameter rho_reference.value ∈ {rB770 rung 3, rA770 StrongRhoG wide, rT770 StrongRhoG fold}, open until item 2 decides:
the same jumps, partition, signed-Frobenius canonicalization, lanes and batched step in the precomputation, the BL online walk and the plain control
Per target (Q0 in 4 blocks, B's 16 fresh public points), one pinned process each, order rotated
IC (B's producer, cached log table)
BL online: walk from $[c]G + Q$, table loaded
single-target rho (the chosen reference)
BL again (A/A, same seed)
every scalar verified in process and replayed in oracle.py; one scalar per point; Q0 = sidecar; IC probes on Q0 = 8,845,441;
BL binary without a table walks the reference's step count on Q0 (step identity); positive controls passed for the chosen implementation
Online clocks: IC five phases (B's); rho family from the first walk start $[c]G + Q$ to the verified collision (B's boundary). Cold = setup + online, reported beside every online ratio.