Original A–E: local End(E) conductor certificates

17 October 2026. Input certification only; no new ECDLP timing run.

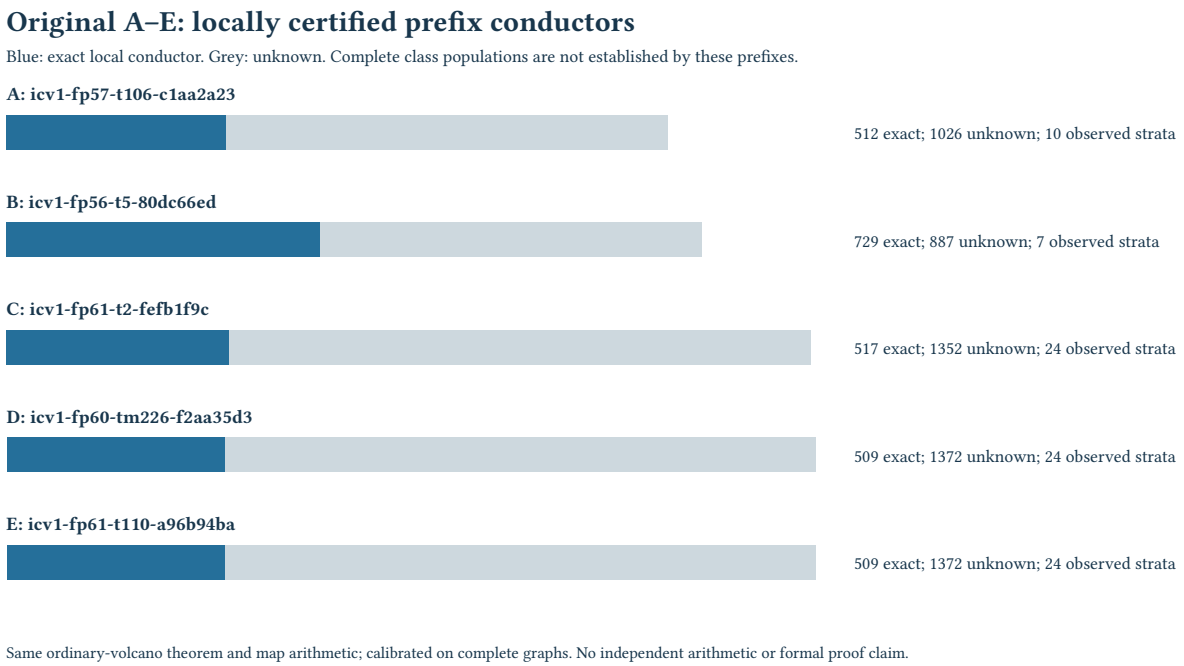

Case	Prime field p	Source conductor	Prefix vertices	Exact vertices	Observed strata
A	126100789566376697	268435456	1538	512	10
B	45862249674083071	129140163	1616	729	7
C	1637958981148213249	967458816	1869	517	24
D	814409292524040673	544195584	1881	509	24
E	1975950516940704721	644972544	1881	509	24

The conductor is the requested index of End(E) in the maximal CM order. These source values are locally determined from complete rational-kernel counts and the standard ordinary-volcano floor-distance correspondence; they are not merely copied Frobenius conductors. For each prime, distance to known floors bounds height above; distance to known floors or unexpanded frontier bounds it below. Only equal finite bounds produce exact labels. Unknown vertices are never declared floors or omitted from coverage.

The same calculation passed all available complete-truth bound/label checks on the three complete additional graphs at visibility cutoffs 0, 1, 17, 1024 and all. The generic certify mode reproduces the earlier C certificate byte for byte. It shares isogeny arithmetic and the standard theorem; this is not an independent arithmetic implementation or a new mathematical theorem.

All five frozen prefix DBs are read immutably. Every output binds its DB SHA-256 and existing map-replay receipt. The original databases and global stratum status are unchanged. Actual local certificate rows and per-conductor counts are in the accompanying archive. No prefix is labeled a complete class. Original full A–E total 7,833,658,967 expected vertices and 515 strata; historical B has a separate complete delivery. A/C/D/E remain incomplete.

The largest prime subgroup and embedding degree are separate properties. In particular C has largest prime order 7 despite its 61-bit field and source conductor 967,458,816. These local labels do not establish a speed advantage, a vulnerability caused by conductor, a full benchmark matrix or finite-field solver support for all models. No deployed-security claim.