Prime Degree Frontier

Adversarial completeness regression

Observed outcome

The frozen ff71f5772 executable accepted a modified public P192/13 artifact whose two map slots contained the same valid map. Fresh verification proved the degree-13 map in each slot, but the COMPLETE coverage label was unsupported. The native regression expected rejection and failed with observed exit 0 rather than 1. This is a coverage-metadata defect; it does not invalidate the degree.

Executed binary source	ff71f577203179760211cdc1dc3da7a33fc77ec1
Test source	2934a2eca
Run time basis	original command file creation time in UTC: 20261016T0022Z
Fresh judge result	ACCEPTED degree 13 coverage COMPLETE
Declared maps / distinct kernels	2 / 1

Input and controls

The native test copied isogenies[0] into isogenies[1] of the real public P192/13 constructor output and recomputed its construction receipt SHA256. The standard source, map coefficients, codomain and subgroup transports stayed mathematically valid. The two displayed records therefore described one kernel rather than two distinct Frobenius eigenlines. Source icv1-fp192-t31607402316713927207482677199-52e4af59 → icv1-fp192-t31607402316713927207482677199-cca00332
Source icv1-fp192-t31607402316713927207482677199-52e4af59 → icv1-fp192-t31607402316713927207482677199-cca00332

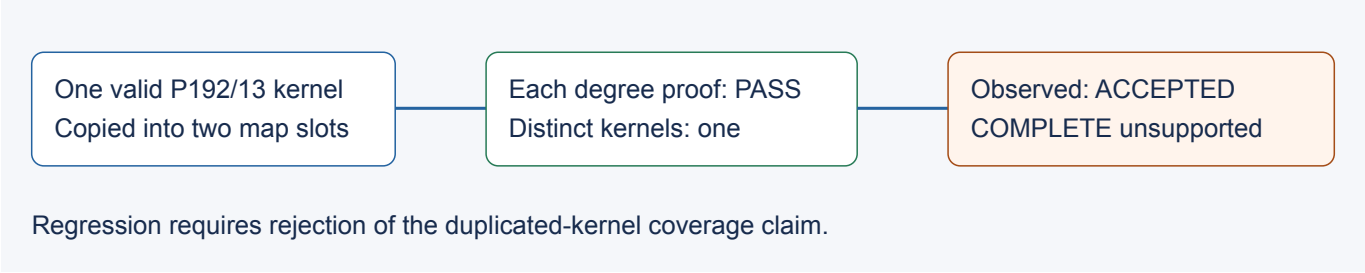

Figure 1: Observed false completeness claim. Both slots contained the same valid map.

Correction and acceptance

The corrected judge compares kernels modulo the source characteristic before accepting two-line coverage, and requires two distinct Frobenius roots for a COMPLETE claim. A partial valid map remains eligible; repeated-root totals are left unestablished. The final corrected-source packet must pass the original controls plus this ninth negative case, twenty scheduling controls and fresh starting-map replay. No additional discovery or speed result is credited.

The exact altered bytes, updated receipt, fresh certificate, accepted entry, stdout/stderr and failed assertion are in the raw packet. Observed entry · Fresh certificate The code and diagnostic use public known-answer fixtures on a shared M4 Pro; there is no isolated timing comparison. The root IC/rho and curve-edge charts remain unchanged because this is an admission-correctness correction.