

TEST REPORT

IEC 60794-1-21:2015+AMD1:2020 - Optical fibre cables - Part 1-21: Generic specification - Basic optical cable test procedures - Mechanical tests method

Report No..... : WLR26/ETI/052/01

Sample No..... : WS26/ETI/052/01

Client Name..... : GST Datacom Technology LLC

Address..... : Al Jaddaf, Dubai, UAE

Testing Laboratory : Wimpey Laboratories LLC

Address : Al Quoz Ind. Area-01, Dubai-UAE.

Test item Description.. : 4F SM FIBER G.657A2 FTTH DROP OUTDOOR CABLE BLACK

Manufacturer..... : Datacom

Part No. /Type Ref..... : DC-FO-04-FTX097A-ODZH

Test Standard / Method : IEC-60794-21 & 22.

Report Date..... : 27/02/2026

Test item received..... : 18/02/2026

Date of Test..... : 26/02/2026

Tested by..... : VVS

Summary of testing... : No visible damage, fiber breakage, or typical failure modes affecting optical continuity were observed after the tensile test.

1 Tensile Performance Test

Reference

IEC 60794-1-21:2015:2015 Optical fibre cables - Part 1-21: Generic specification - Basic optical cable test procedures - Mechanical tests methods

Method E1: Tensile performance

Sample length

The length of sample under tension is 150 meters.

Test Apparatus

Description	Asset No.	Make & Model
Cable tensile machine	WML-459-83	Syscon - 1154-2CH-AI-SUM SPL
Fiber test detector	WML-459-01-2	AFL
Fusion splicer	WML-459-02	Fujikura - 62S
Stop watch	WCAL-92	Extech

Test conditions

Temperature : 23 ± 2 °C

Relative Humidity : 50 ± 5 %

This test is performed at lab ambient.

The load applied to the cable shall be the rated installation load (600 N for 10 mints) of the cable.

Procedure

- 1) Apply short time load (600N) for 10 min.
- 2) Measure fiber break measurements using with fiberscope.
- 3) Inspect the DUT for physical damage, fiber break & failure modes of optical continuity

Requirements

No Fiber break

No physical damage

No typical failure modes of optical continuity

Results

Tensile Performance Test		
Sample Length (Meters)	Applied Force	Duration
150	600 N	10 min.

Category	Measurement Method	Acceptance Criteria	Results
Sheath Condition	Visual Inspection	No Visible Damage	No Visible Damage
Cable Elements (Fiber)	Fiber break & optical continuity	No Breakage & No typical failure modes of optical continuity	No Breakage & No typical failure modes of optical continuity

Remarks:

As requested by the client, the scope of test and final assessment conducted for physical damage, fiber break and no typical failure modes of optical continuity.

Signed for and on behalf of Wimpey Laboratories L.L.C



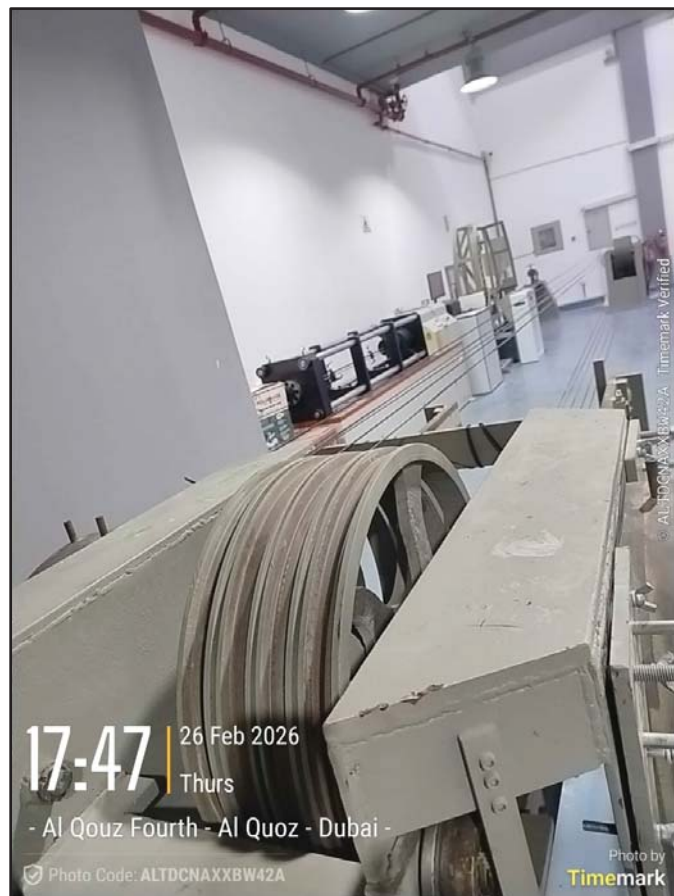

Sajeesh Varkey

Laboratory Manager – E & E

Test results relate only to the samples tested.

This report shall not be reproduced except in full, without the written approval of the Laboratory.

Photograph of Test Object and Marking



-End of text-