


01 Chassis plate

Print 1 4 thick (the wing is 2 thick)

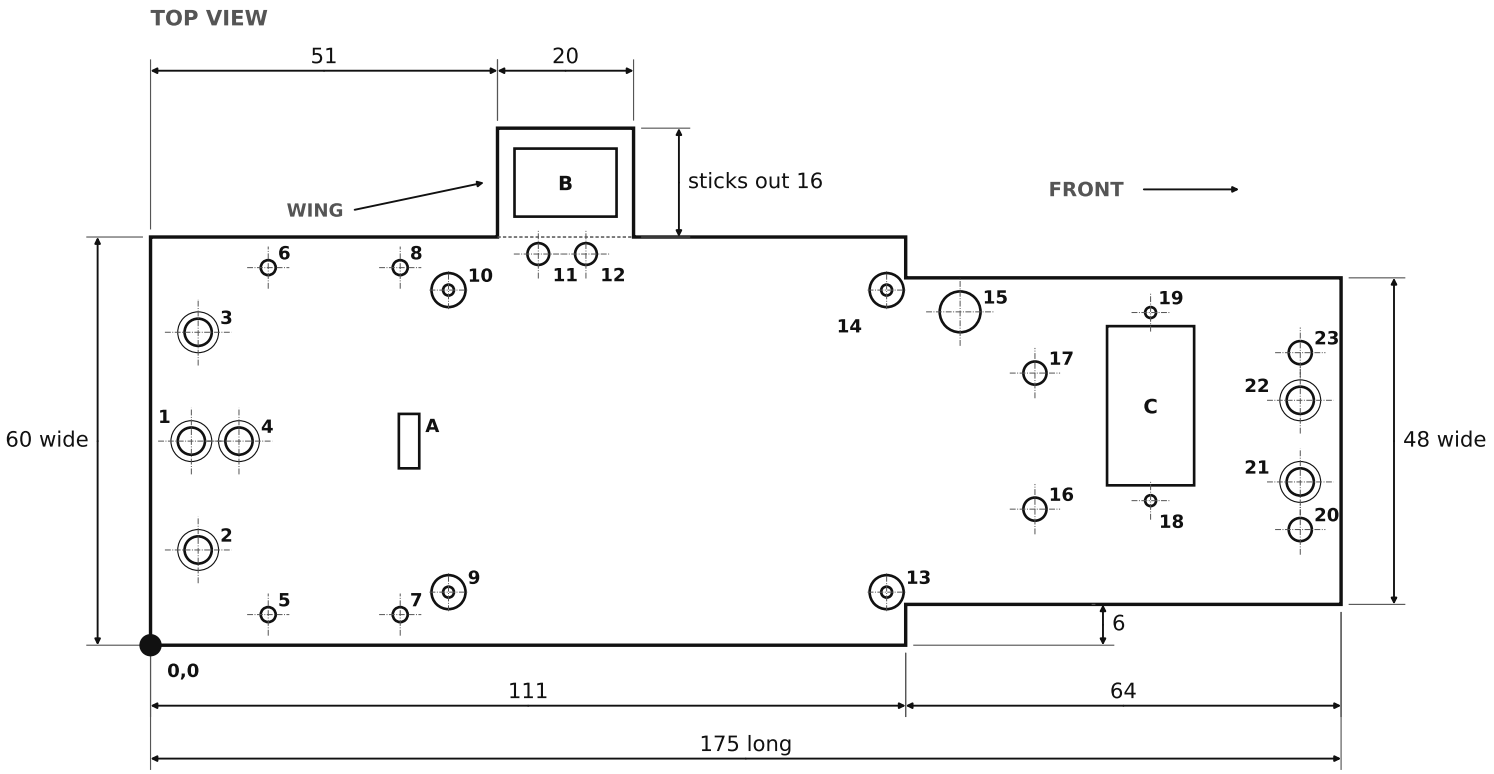

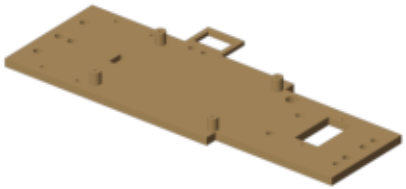

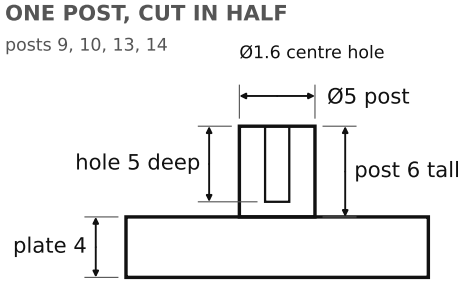

HOLE LIST

measured from the back edge and the right edge to each hole's centre

#	from back	from right	size
1	6	30	Ø4.0 insert hole, through
2	7	14	Ø4.0 insert hole, through
3	7	46	Ø4.0 insert hole, through
4	13	30	Ø4.0 insert hole, through
5	17.3	4.5	Ø2.2 hole, through
6	17.3	55.5	Ø2.2 hole, through
7	36.7	4.5	Ø2.2 hole, through
8	36.7	55.5	Ø2.2 hole, through
A	38	30	3 x 8 cutout, through

#	from back	from right	size
9	43.8	7.8	Ø5 post 6 tall, Ø1.6 x 5 deep
10	43.8	52.2	Ø5 post 6 tall, Ø1.6 x 5 deep
11	57	57.5	Ø3.2 hole, through
B	61	68	15 x 10 cutout, through
12	64	57.5	Ø3.2 hole, through
13	108.2	7.8	Ø5 post 6 tall, Ø1.6 x 5 deep
14	108.2	52.2	Ø5 post 6 tall, Ø1.6 x 5 deep
15	119	49	Ø6 hole, through
16	130	20	Ø3.4 hole, through


#	from back	from right	size
17	130	40	Ø3.4 hole, through
18	147	21.25	Ø1.6 hole, through
C	147	35.2	12.8 x 23.4 cutout, through
19	147	48.9	Ø1.6 hole, through
20	169	17	Ø3.4 hole, through
21	169	24	Ø4.0 insert hole, through
22	169	36	Ø4.0 insert hole, through
23	169	43	Ø3.4 hole, through

through = all the way through the plate. Insert hole = plain Ø4.0 hole; a brass insert is melted in after printing.


02 Steering beam

Print 1, flat on its bottom all edges rounded 0.6

FRONT VIEW

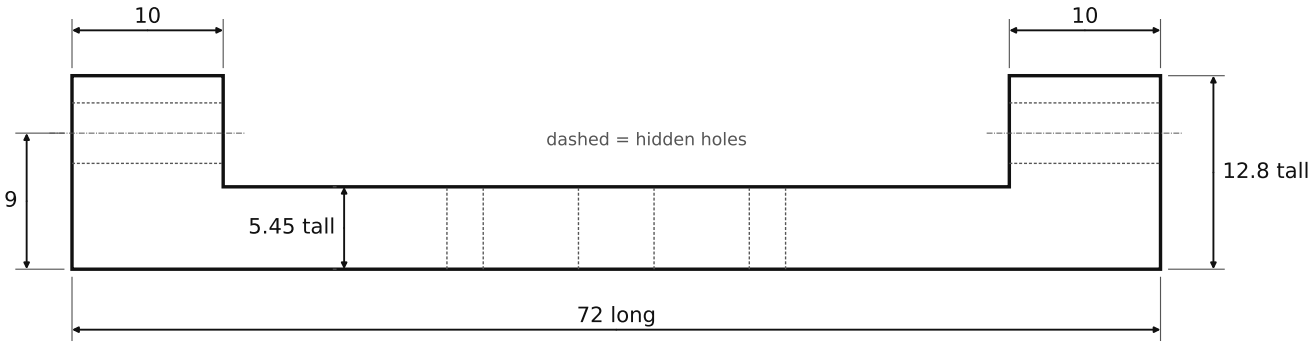


END VIEW

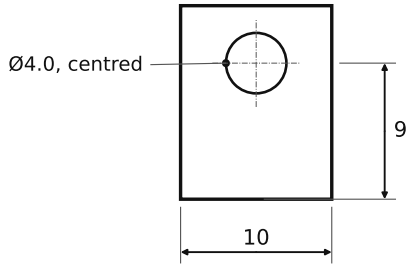


through the
full 10 length

TOP VIEW

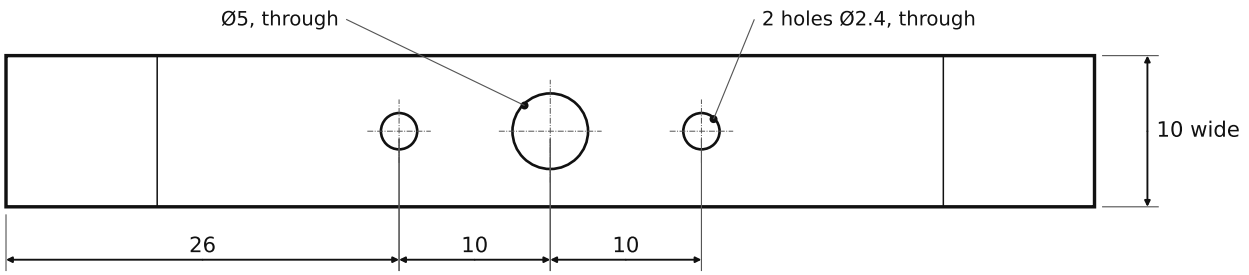

all 3 holes centred across the width

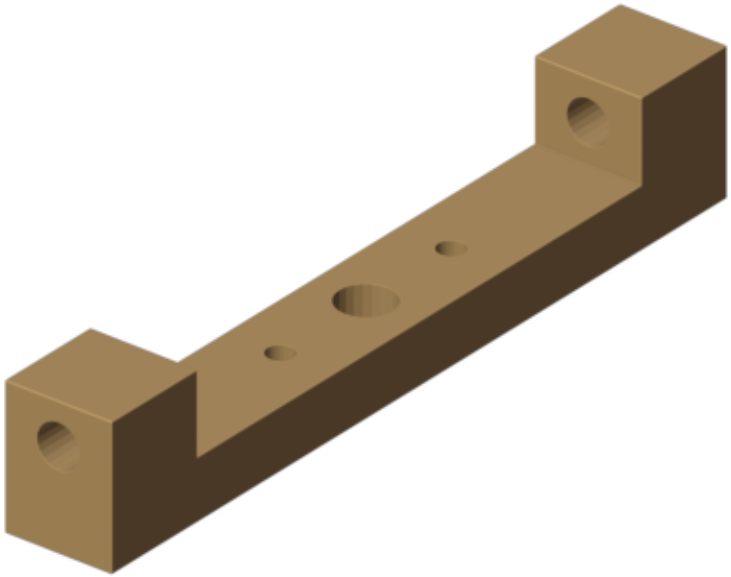


The part

03 Battery tray

Print 1, floor down

TOP VIEW

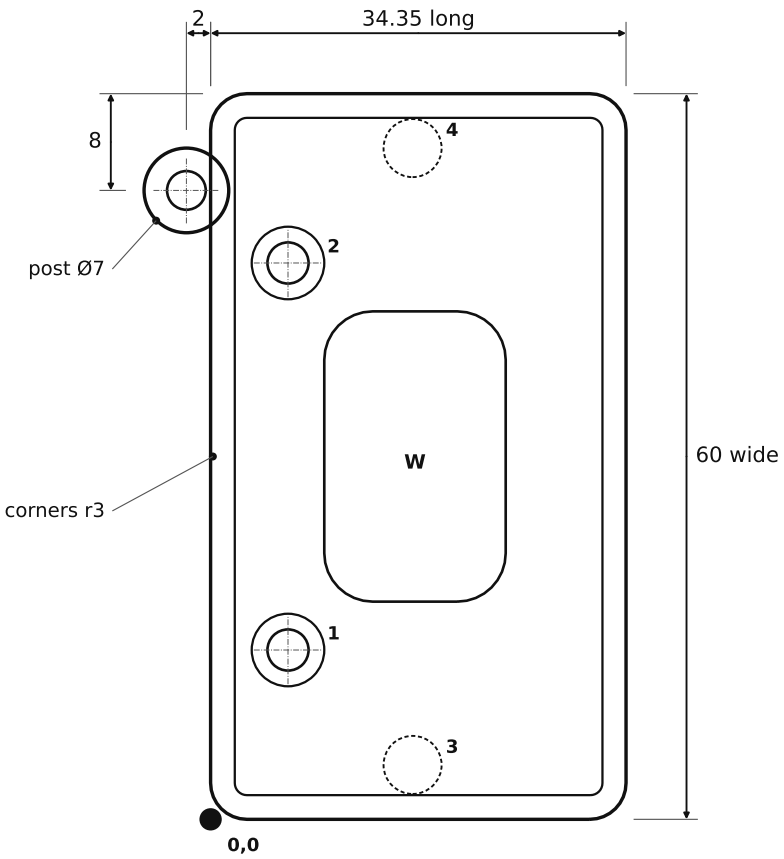

inside: 30.4 x 56

FRONT →

walls 2 thick (front 1.95), inside corners r1

dashed circles 3 and 4: on the bottom

SIDE VIEW (right side)

dashed = top of the floor




top outside edge: 0.6 chamfer

HOLES (from the back and right edges to the centre)

#	from back	from right	size
1	6.4	14	Ø3.4 hole + Ø6 step: hole all the way through, step 3 down
2	6.4	46	Ø3.4 hole + Ø6 step: hole all the way through, step 3 down
3	16.7	4.5	Ø4.8 pocket: 2.3 up from the bottom
4	16.7	55.5	Ø4.8 pocket: 2.3 up from the bottom
W	16.9	30	15 x 24 window, r4 corners: all the way through
post	-2	52	Ø7 post, Ø3.2 hole: post 11 tall, hole 8 down

post at -2 = 2 behind the back edge

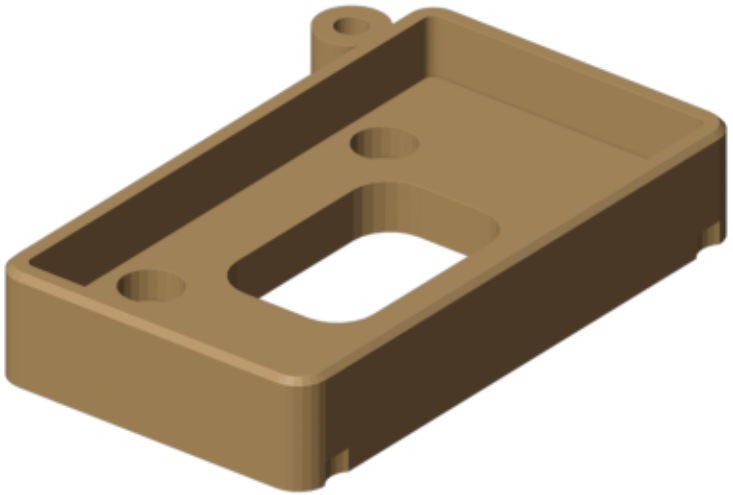


The part


04 Front bumper

Print 1, front face down wall 3 thick all edges rounded 0.9


SIDE SHAPE (right side)

join P1 to P10, then extrude 64

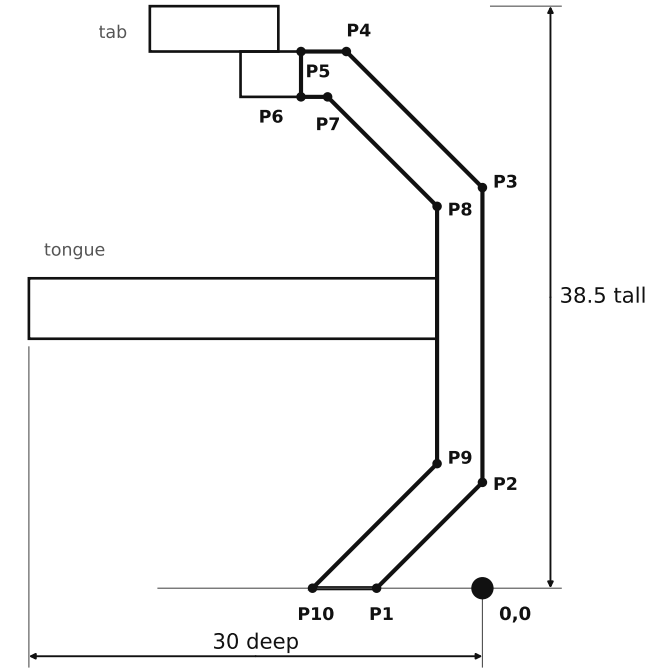



The part (from behind)

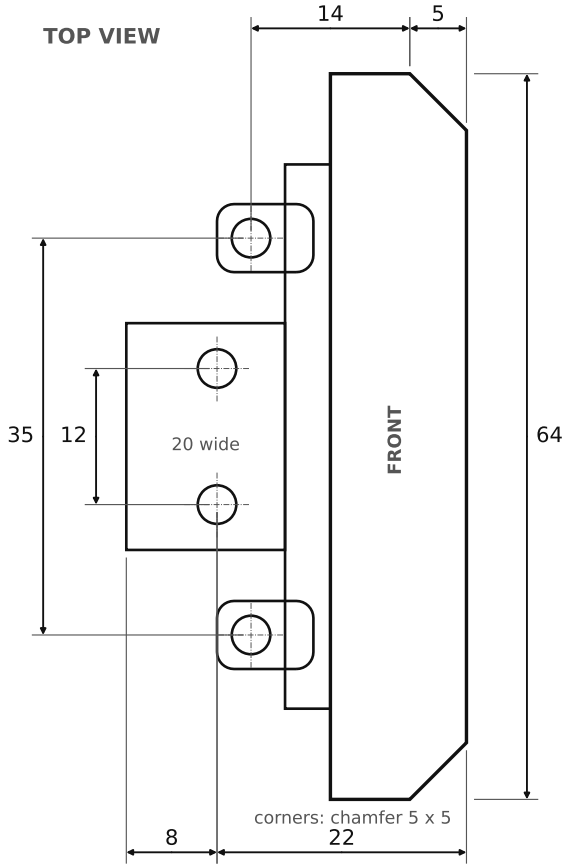

SIDE SHAPE POINTS

in = back from the front face, up = up from the bottom


pt	in	up	pt	in	up
P1	7	0	**P6**	12	32.5
P2	0	7	**P7**	10.24	32.5
P3	0	26.5	**P8**	3	25.26
P4	9	35.5	**P9**	3	8.24
P5	12	35.5	**P10**	11.24	0

ADDED PIECES (out = from the centre line)

piece	in	up	width
tongue	3 to 30	16.5 to 20.5	20 wide, centred
top lip	12 to 16	32.5 to 35.5	48 wide, centred
2 tabs	13.5 to 22	35.5 to 38.5	6 wide, centred 17.5 out, corners r1.5
2 middle braces	triangle (12, 20.5) (3, 20.5) (3, 28.5)		3 wide, from 5.5 to 8.5 out
2 end braces	(16, 32.5) (10.24, 32.5) (3, 25.26) (3, 18.5)		3 wide, from 19.5 to 22.5 out

05 Servo box


Print 1, top face down open bottom

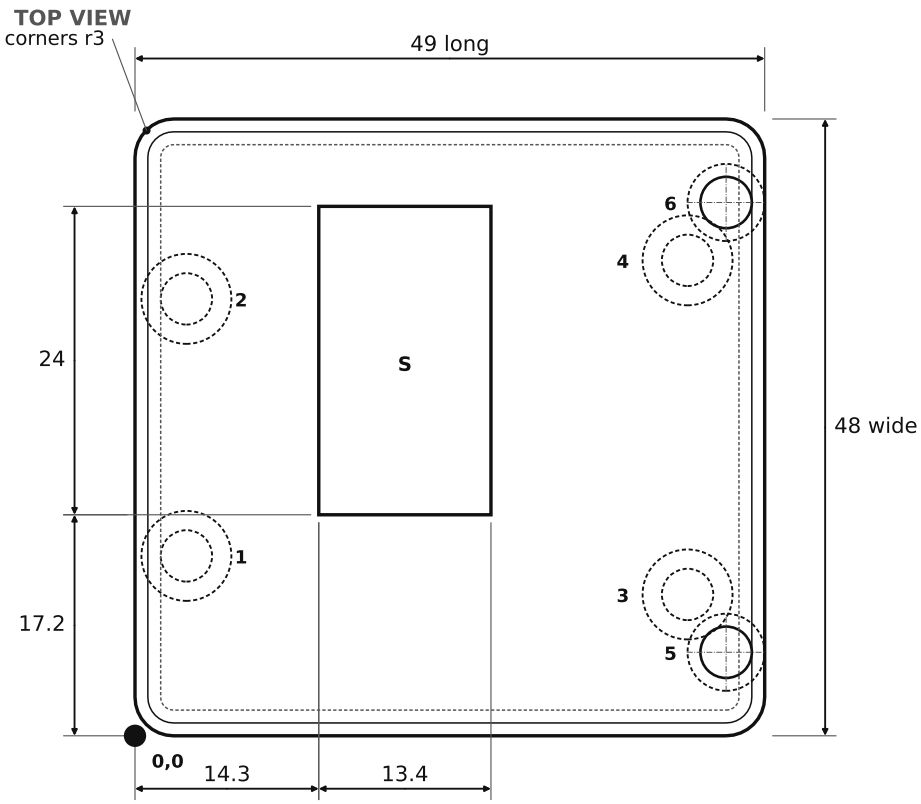


HOLES (from the back and right edges to the centre)

#	from back	from right	size
1	4	14	Ø7 post, bottom to top. Ø4.0 hole 6 deep from bottom
2	4	34	Ø7 post, bottom to top. Ø4.0 hole 6 deep from bottom
3	43	11	Ø7 post, bottom to top. Ø4.0 hole 6 deep from bottom
4	43	37	Ø7 post, bottom to top. Ø4.0 hole 6 deep from bottom
5	46	6.5	Ø6 post, 3 up to the top. Ø4.0 hole 8 deep from top
6	46	41.5	Ø6 post, 3 up to the top. Ø4.0 hole 8 deep from top
S	21	29.2	13.4 x 24 servo hole, through the top

SIDE VIEW (right side)

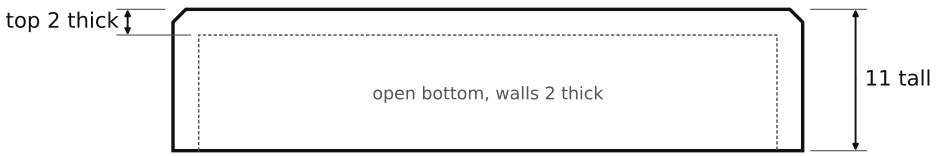

top outside edge: 1 chamfer inside corners r1

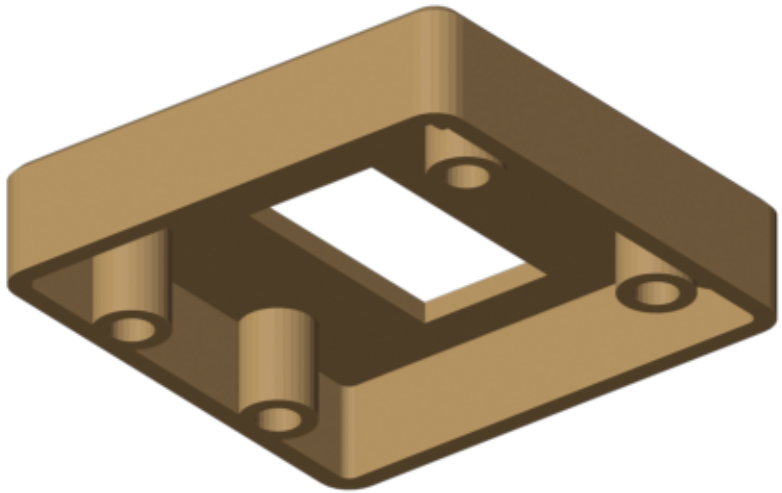


The part (from below)

06 Antenna

Print 1, lying on its side just for looks

SIDE VIEW (round all along)

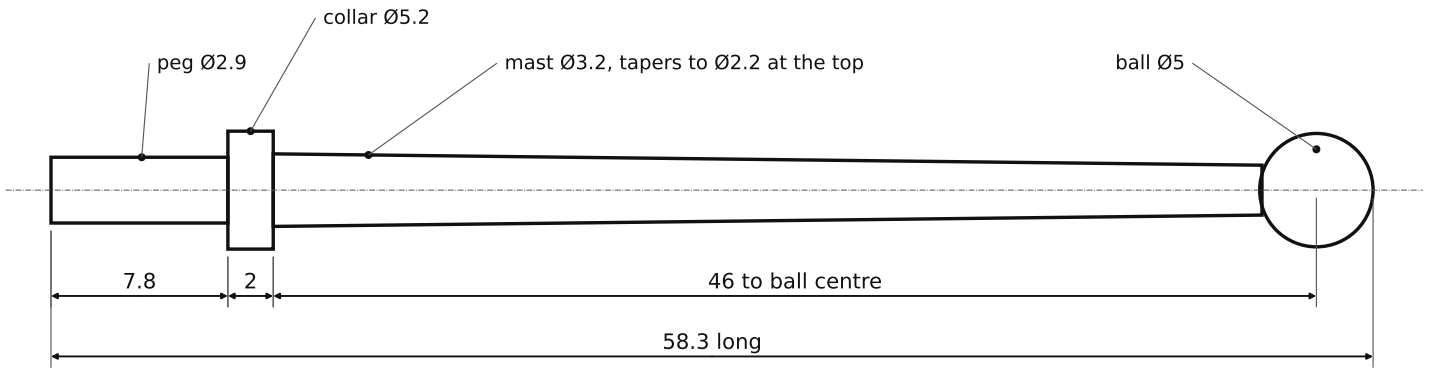




The part

07 Tow hook


Print 1, on its flat bottom all edges rounded 0.8


SIDE VIEW (right side)

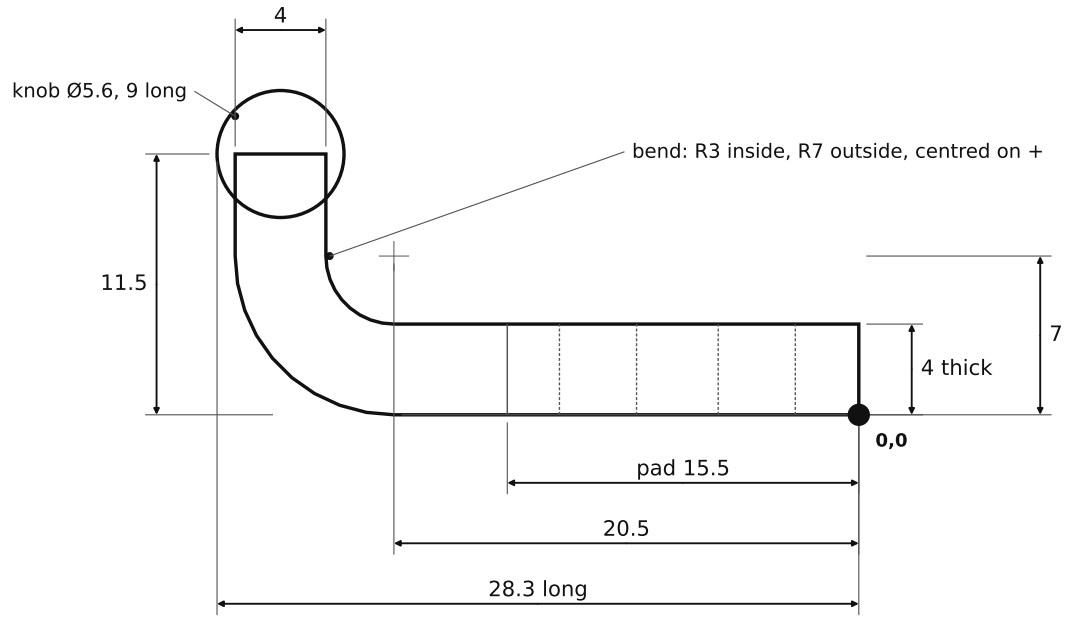

20.5 and 7 are measured to + (bend centre)

TOP VIEW

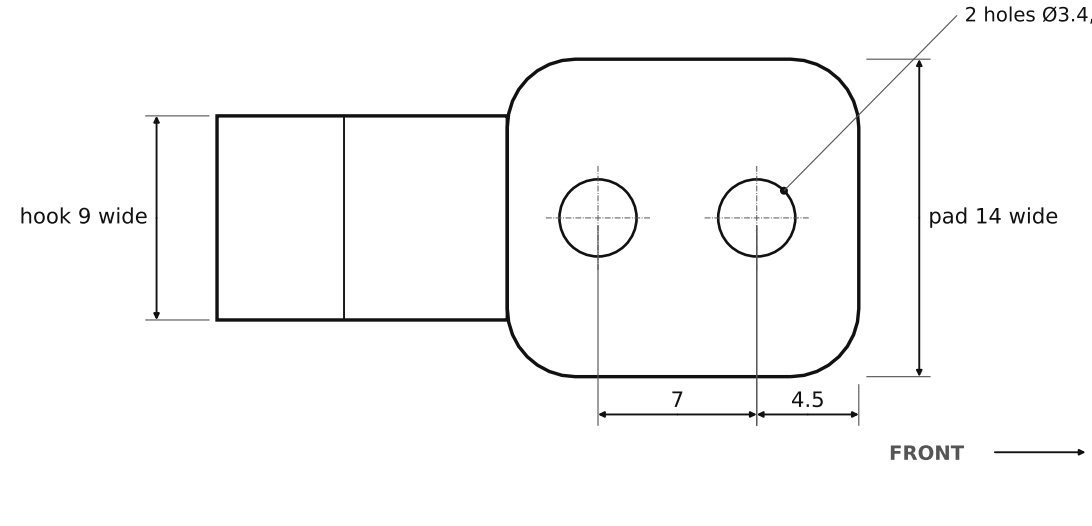

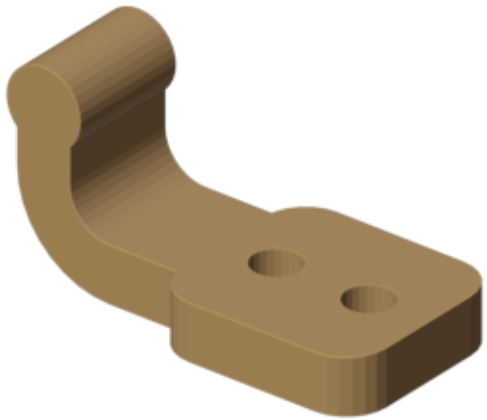

The part