


ASTRO MASONRY©2025-26 | ALL RIGHTS RESERVED

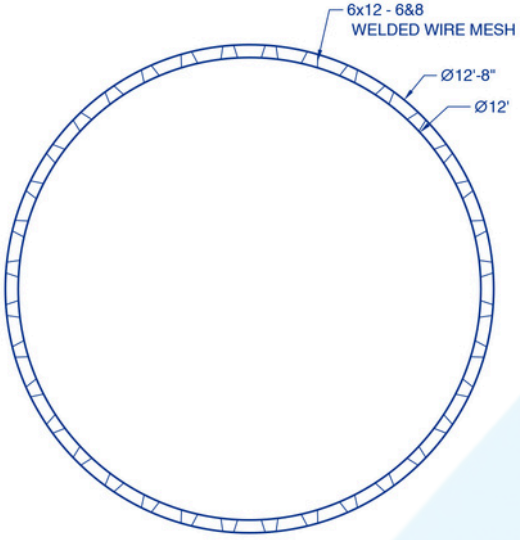


TOP VIEW 1:30

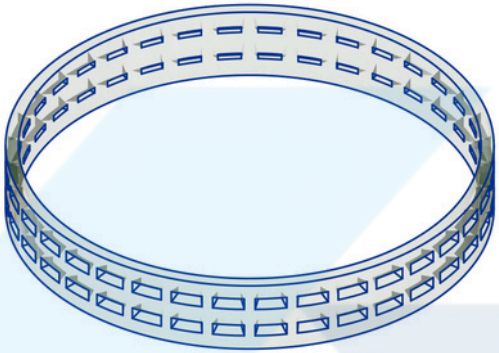


ISOMETRIC VIEW 1:30

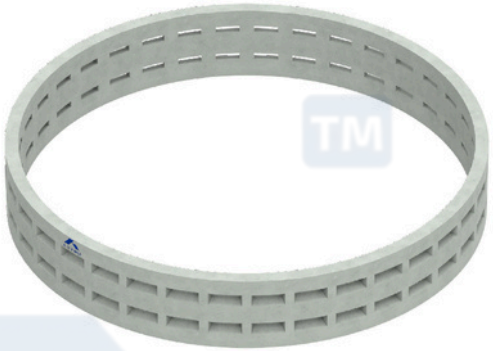


3D RENDER

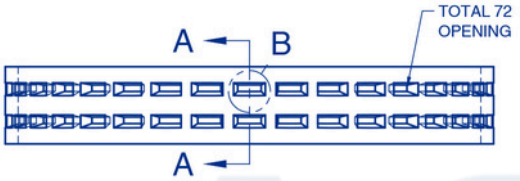

PLAN VIEW 1:30



DETAIL B
SCALE 1:28

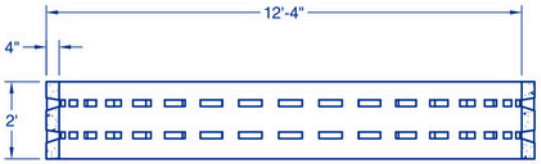

SECTION A-A
SCALE 1:30

ADDITIONAL NOTES:

REINFORCEMENT: WWF 6" × 12" - 6&8,
W2.0 × W2.0 (ASTM A1064)
MESH CENTERED IN 4" WALL WITH 1.5"
MIN COVER

PRODUCT NO.	AR 122 STR
DESCRIPTION	12' X 2' STORM RING
STANDARD	SUFFOLK & NASSAU COUNTY
WALL THICKNESS	4" INCHES
DRAIN WALL AREA	105 SQ.FT.
DIAMETERS	OUTER - 12'8"
	INNER - 12"
OPENINGS	NO. OF OPENING - 72
	SIZE - 10 X 4 INCH
WEIGHT	4200 LBS
LOAD RATING	A.A.S.H.T.O. HS20-44
TESTING BY	ALL ISLAND TESTING
ENGINEERING BY	FIONA S.

ENGINEERS APPROVAL SPACE

SPECIFICATIONS

1. CONCRETE TO HAVE A MINIMUM 28 DAY
2. COMPRESSIVE STRENGTH OF 4000 PSI.
3. REINFORCING STEEL TO COMPLY WITH ASTM A-615 GRADE 60 ASTM A-185-02
4. DRAWING SCALE 1:30
5. ALL DIMENSIONS ARE IN INCHES
6. TOLERANCE X ± 0.5"
7. CONFORMS TO LOCAL STANDARDS & SPECIFICATIONS AS APPLICABLE
8. INSTALLING INSTRUCTIONS AVAILABLE SEPERATELY

PROPRIETARY & CONFIDENTIAL


THE INFORMATION CONTAINED IN THIS DOCUMENTS IS THE SOLE PROPERTY OF ASTRO MASONRY. ANY REPRODUCTION, MANUFACTURING, DISCLOSURE IN PART OR AS A WHOLE WITHOUT THE WRITTEN CONSENT OF IS PROHIBITED.

COMPANY ADDRESS


928, LONG ISLAND AVENUE
DEER PARK, NY 11729
☎ 631-667-3300
www.astromasonry.com

ASTRO


ASTRO MASONRY©2025-26 | ALL RIGHTS RESERVED

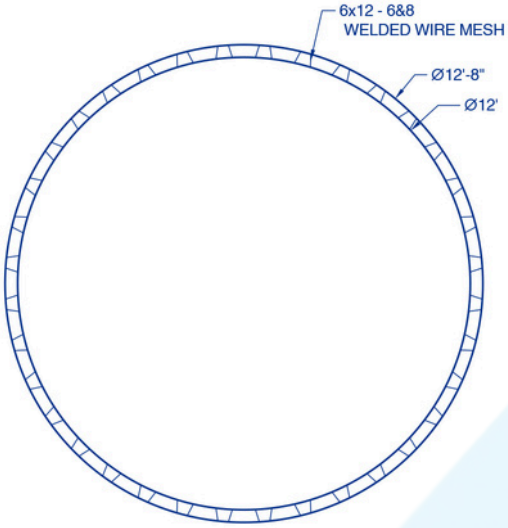


TOP VIEW 1:30

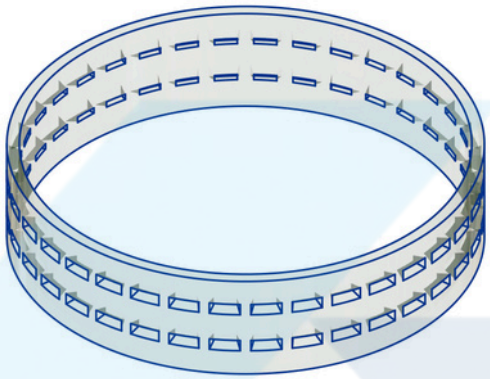


ISOMETRIC VIEW 1:30

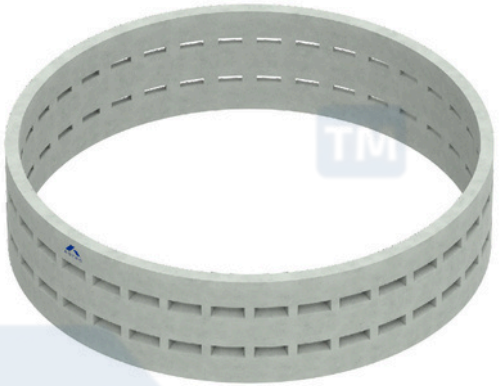


3D RENDER

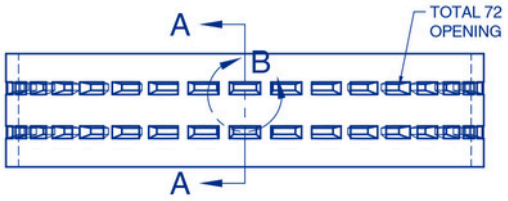

PLAN VIEW 1:30



DETAIL B
SCALE 1:28

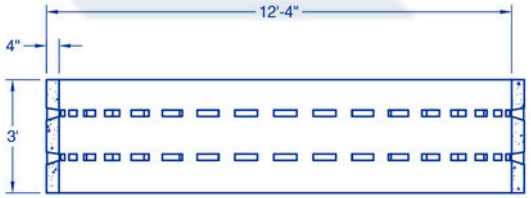

SECTION A-A
SCALE 1:30

ADDITIONAL NOTES:

REINFORCEMENT: WWF 6" × 12" - 6&8,
W2.0 × W2.0 (ASTM A1064)
MESH CENTERED IN 4" WALL WITH 1.5"
MIN COVER

PRODUCT NO.	AR 123 STR
DESCRIPTION	12' X 3' STORM RING
STANDARD	SUFFOLK & NASSAU COUNTY
WALL THICKNESS	4" INCHES
DRAIN WALL AREA	113.1 SQ.FT.
DIAMETERS	OUTER - 12'8"
	INNER - 12'
OPENINGS	NO. OF OPENING - 72
	SIZE - 10 X 4 INCH
WEIGHT	4875 LBS.
LOAD RATING	A.A.S.H.T.O. HS20-44
TESTING BY	ALL ISLAND TESTING
ENGINEERING BY	FIONA S.

ENGINEERS APPROVAL SPACE

SPECIFICATIONS

1. CONCRETE TO HAVE A MINIMUM 28 DAY
2. COMPRESSIVE STRENGTH OF 4000 PSI.
3. REINFORCING STEEL TO COMPLY WITH ASTM A-615 GRADE 60 ASTM A-185-02
4. DRAWING SCALE 1:30
5. ALL DIMENSIONS ARE IN INCHES
6. TOLERANCE X ± 0.5"
7. CONFORMS TO LOCAL STANDARDS & SPECIFICATIONS AS APPLICABLE
8. INSTALLING INSTRUCTIONS AVAILABLE SEPERATELY

PROPRIETARY & CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DOCUMENTS IS THE SOLE PROPERTY OF ASTRO MASONRY. ANY REPRODUCTION, MANUFACTURING, DISCLOSURE IN PART OR AS A WHOLE WITHOUT THE WRITTEN CONSENT OF IS PROHIBITED.


COMPANY ADDRESS

928, LONG ISLAND AVENUE
DEER PARK, NY 11729
☎ 631-667-3300
www.astromasonry.com


ASTRO

12' X 4' STORM RING


ASTRO MASONRY©2025-26 | ALL RIGHTS RESERVED

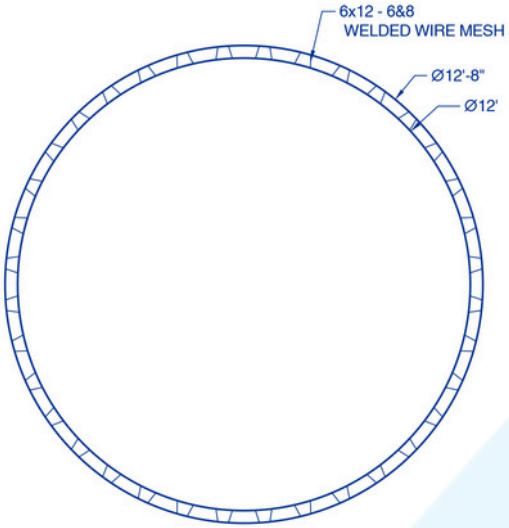


TOP VIEW 1:30

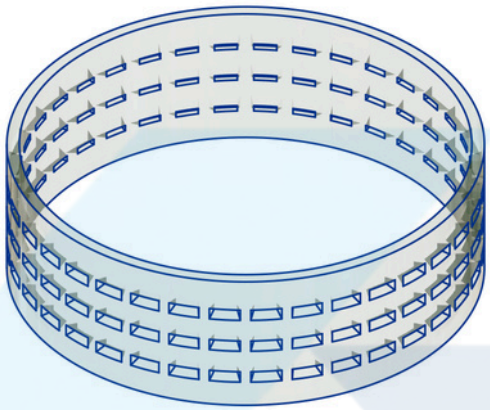


ISOMETRIC VIEW 1:30

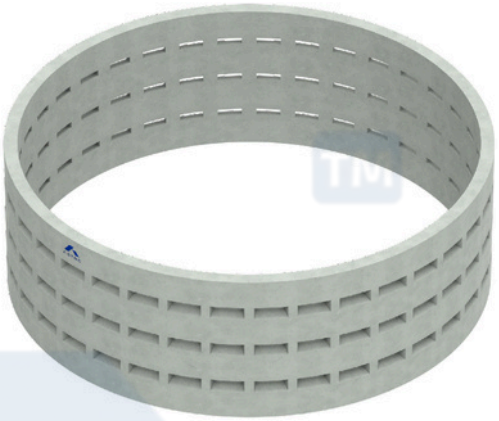


3D RENDER

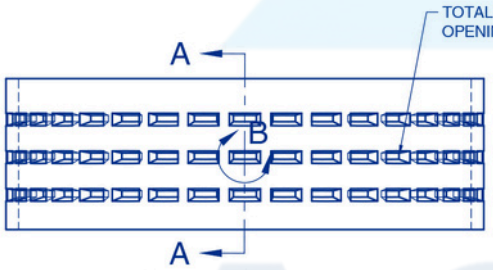

PLAN VIEW 1:30



DETAIL B
SCALE 1:28

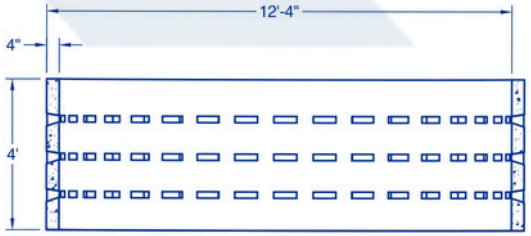

SECTION A-A
SCALE 1:30

ADDITIONAL NOTES:

REINFORCEMENT: WWF 6" × 12" - 6&8,
W2.0 × W2.0 (ASTM A1064)
MESH CENTERED IN 4" WALL WITH 1.5"
MIN COVER

PRODUCT NO.	AR 124 STR
DESCRIPTION	12' X 4' STORM RING
STANDARD	SUFFOLK & NASSAU COUNTY
WALL THICKNESS	4" INCHES
DRAIN WALL AREA	150.8 SQ.FT.
DIAMETERS	OUTER - 12'8"
	INNER - 12'
OPENINGS	NO. OF OPENING -
	SIZE - 10 X 4 INCH
WEIGHT	6500 LBS.
LOAD RATING	A.A.S.H.T.O. HS20-44
TESTING BY	ALL ISLAND TESTING
ENGINEERING BY	FIONA S.

ENGINEERS APPROVAL SPACE

SPECIFICATIONS

1. CONCRETE TO HAVE A MINIMUM 28 DAY
2. COMPRESSIVE STRENGTH OF 4000 PSI.
3. REINFORCING STEEL TO COMPLY WITH ASTM A-615 GRADE 60 ASTM A-185-02
4. DRAWING SCALE 1:30
5. ALL DIMENSIONS ARE IN INCHES
6. TOLERANCE X ± 0.5"
7. CONFORMS TO LOCAL STANDARDS & SPECIFICATIONS AS APPLICABLE
8. INSTALLING INSTRUCTIONS AVAILABLE SEPERATELY

PROPRIETARY & CONFIDENTIAL


THE INFORMATION CONTAINED IN THIS DOCUMENTS IS THE SOLE PROPERTY OF ASTRO MASONRY. ANY REPRODUCTION, MANUFACTURING, DISCLOSURE IN PART OR AS A WHOLE WITHOUT THE WRITTEN CONSENT OF IS PROHIBITED.

COMPANY ADDRESS


928, LONG ISLAND AVENUE
DEER PARK, NY 11729
☎ 631-667-3300
www.astromasonry.com

ASTRO


ASTRO MASONRY©2025-26 | ALL RIGHTS RESERVED

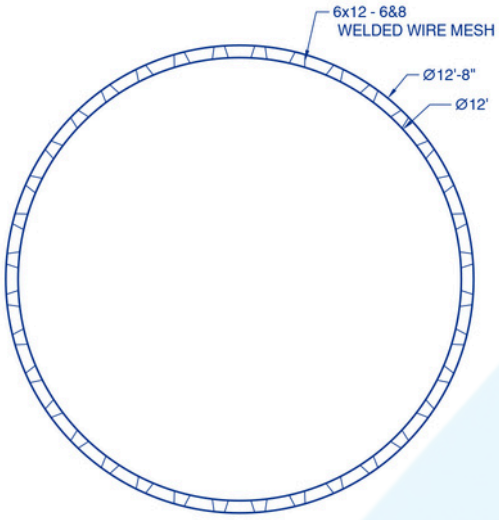


TOP VIEW 1:30

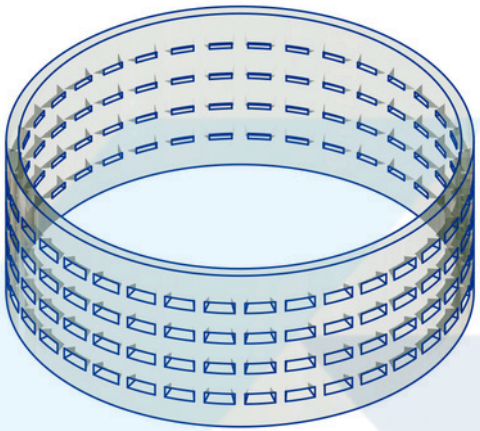


ISOMETRIC VIEW 1:30

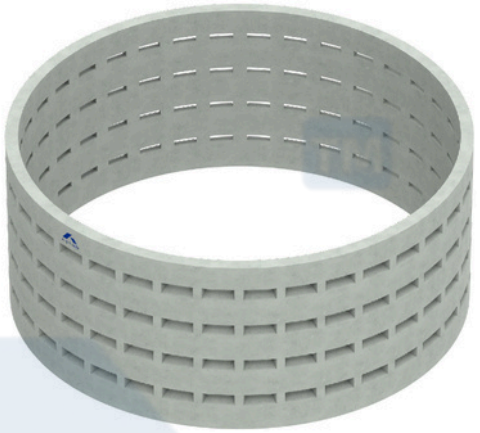


3D RENDER

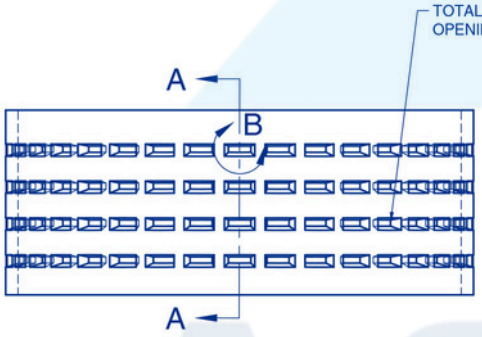

PLAN VIEW 1:30



DETAIL B
SCALE 1:28

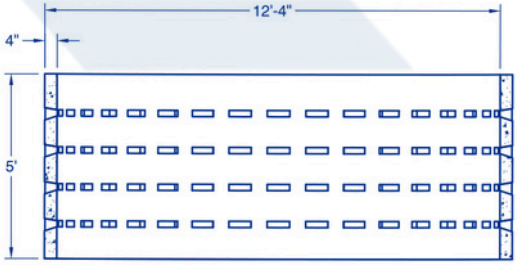

SECTION A-A
SCALE 1:30

ADDITIONAL NOTES:

REINFORCEMENT: WWF 6" × 12" - 6&8,
W2.0 × W2.0 (ASTM A1064)
MESH CENTERED IN 4" WALL WITH 1.5"
MIN COVER

PRODUCT NO.	AR 125 STR
DESCRIPTION	12' X 5' STORM RING
STANDARD	SUFFOLK & NASSAU COUNTY
WALL THICKNESS	4" INCHES
DRAIN WALL AREA	188.5 SQ.FT.
DIAMETERS	OUTER - 12'8"
	INNER - 12'
OPENINGS	NO. OF OPENING - 144
	SIZE - 10 X 4 INCH
WEIGHT	8125 LBS.
LOAD RATING	A.A.S.H.T.O. HS20-44
TESTING BY	ALL ISLAND TESTING
ENGINEERING BY	FIONA S.

ENGINEERS APPROVAL SPACE

SPECIFICATIONS

1. CONCRETE TO HAVE A MINIMUM 28 DAY
2. COMPRESSIVE STRENGTH OF 4000 PSI.
3. REINFORCING STEEL TO COMPLY WITH ASTM A-615 GRADE 60 ASTM A-185-02
4. DRAWING SCALE 1:30
5. ALL DIMENSIONS ARE IN INCHES
6. TOLERANCE X ± 0.5"
7. CONFORMS TO LOCAL STANDARDS & SPECIFICATIONS AS APPLICABLE
8. INSTALLING INSTRUCTIONS AVAILABLE SEPERATELY

PROPRIETARY & CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DOCUMENTS IS THE SOLE PROPERTY OF ASTRO MASONRY. ANY REPRODUCTION, MANUFACTURING, DISCLOSURE IN PART OR AS A WHOLE WITHOUT THE WRITTEN CONSENT OF IS PROHIBITED.


COMPANY ADDRESS


928, LONG ISLAND AVENUE
DEER PARK, NY 11729
☎ 631-667-3300
www.astromasonry.com

ASTRO

ASTRO™

PRECAST CONCRETE FOOTING RINGS

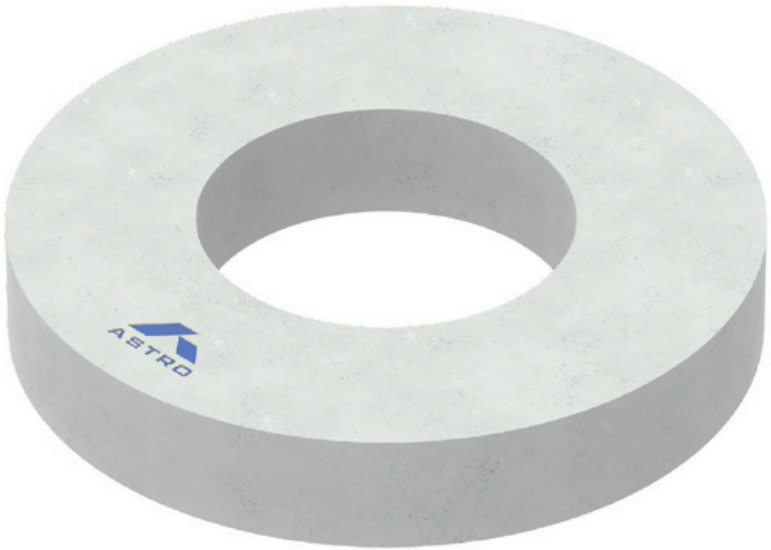

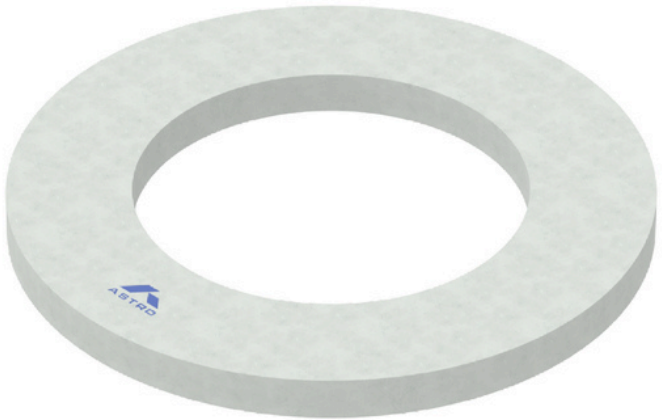

FOOTING RINGS

4' CONCRETE FOOTING RING

6' CONCRETE FOOTING RING


8' CONCRETE FOOTING RING

10' CONCRETE FOOTING RING


12' CONCRETE FOOTING RING

4' CIRCULAR FOOTING RING


ASTRO MASONRY©2025-26 I ALL RIGHTS RESERVED

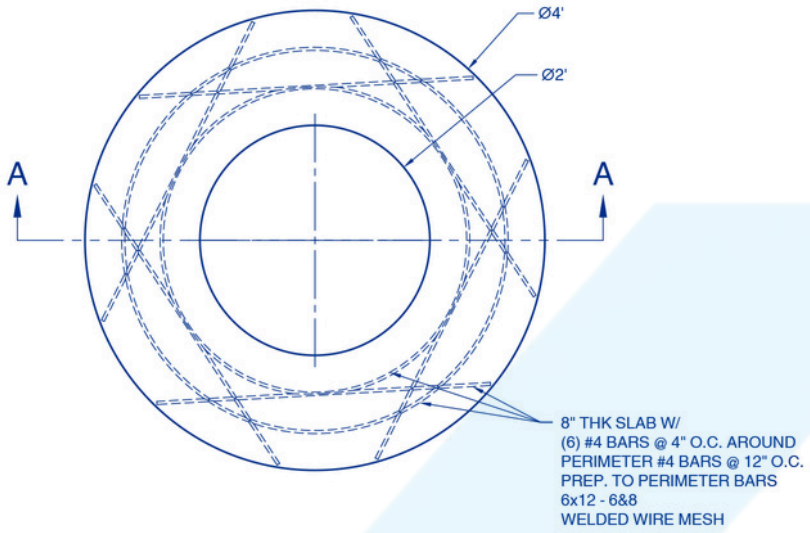


TOP VIEW 1:10

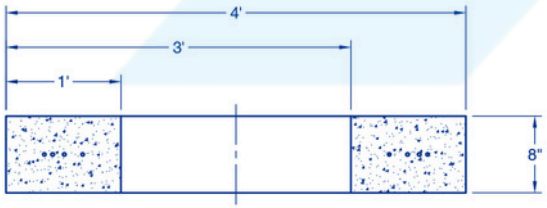

SECTION A-A
SCALE 1:10

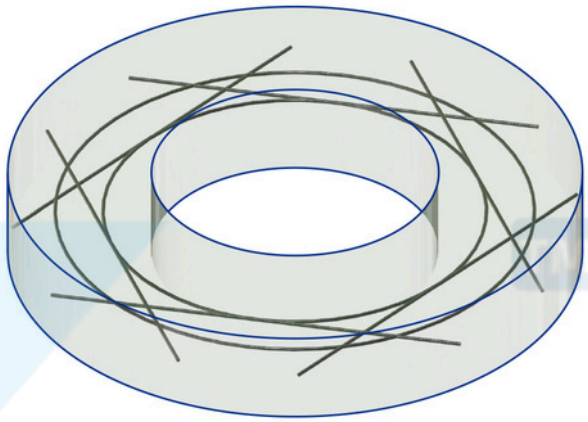

ISOMETRIC VIEW 1:8

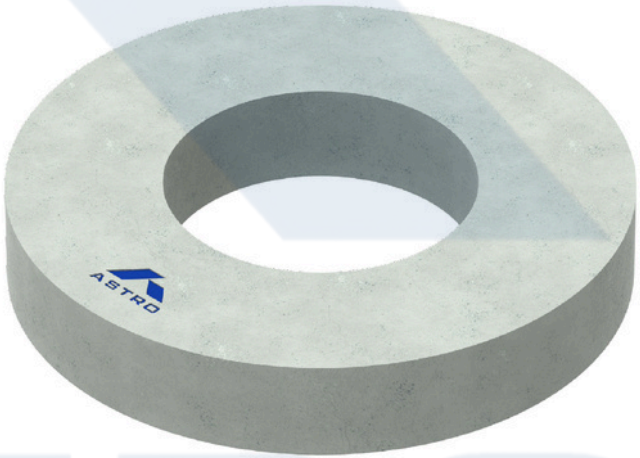

3D RENDER

PRODUCT NO.	AR 4 FR
DESCRIPTION	4' FOOTING RING
STANDARD	SUFFOLK & NASSAU COUNTY
WIDTH	4'
SLAB THICKNESS	8" INCH
DIAMETERS	OUTER - 4'
	INNER - 2'
WEIGHT	624 LBS.
LOAD RATING	A.A.S.H.T.O. HS20-44
TESTING BY	ALL ISLAND TESTING
ENGINEERING BY	FIONA S.

ENGINEERS APPROVAL SPACE

SPECIFICATIONS

1. CONCRETE TO HAVE A MINIMUM 28 DAY
2. COMPRESSIVE STRENGTH OF 4000 PSI.
3. REINFORCING STEEL TO COMPLY WITH ASTM A-615 GRADE 60 ASTM A-185-02
4. DRAWING SCALE 1:10
5. ALL DIMENSIONS ARE IN INCHES
6. TOLERANCE X ± 0.5"
7. CONFORMS TO LOCAL STANDARDS & SPECIFICATIONS AS APPLICABLE
8. INSTALLING INSTRUCTIONS AVAILABLE SEPERATELY

PROPRIETARY & CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DOCUMENTS IS THE SOLE PROPERTY OF ASTRO MASONRY. ANY REPRODUCTION, MANUFACTURING, DISCLOSURE IN PART OR AS A WHOLE WITHOUT THE WRITTEN CONSENT OF ASTRO IS PROHIBITED

COMPANY ADDRESS

928, LONG ISLAND AVENUE
DEER PARK, NY 11729
☎ 631-667-3300
www.astromasonry.com

ASTRO

ADDITIONAL NOTES:

REINFORCEMENT: WWF 6" × 12" - 6&8,
W2.0 × W2.0 (ASTM A1064)
MESH CENTERED IN 8" WALL WITH 1.5"
MIN COVER