

SGJ-UI1100/1300 Series Full Automatic UV Spot Coating Machine



Machine Introduction

This machine is used for both full and spot varnishing on light and thick paper with accurate and even spot coating register by blanket or flexo plate. It is suitable for spot or full coating on words and graphics in books, advertisement sheets, color paperboard to enhance its dimensional quality. Many safeguards and human-based operating procedures ensure user safety and convenience. Imported elements for main bearings and electrical components are adopted in the machine.

Features:

- 1. Feeder:**
Pre-stack system: photocell paper position.
Optional:
 1. Non-stop feeding unit
 2. Non-stop delivery
 3. Chambered doctor blade system and ceramic anilox roller
- 2. Varnishing main part:**
 - Gripper chain conveying system
 - Rubber roller coating structure
 - Automatic lubrication system
 - Optional: ceramic anilox roller coating system with different LPI
- 3. Heating and drying system:**
With one row drying system. Optional: lengthened tunnel, one more row heating and drying system.
- 4. UV curing system:**
Full or half lamp shift. Optional: stepless infinitely adjustable-speed power unit: LED UV lamp.
- 5. Down stacker:**
Air pressure delivery. Optional: air conditioner cooling unit: non-stop delivery.

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.




PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657



SGJ-UI1100/1300 Series Full Automatic UV Spot Coating Machine

Plan diagram

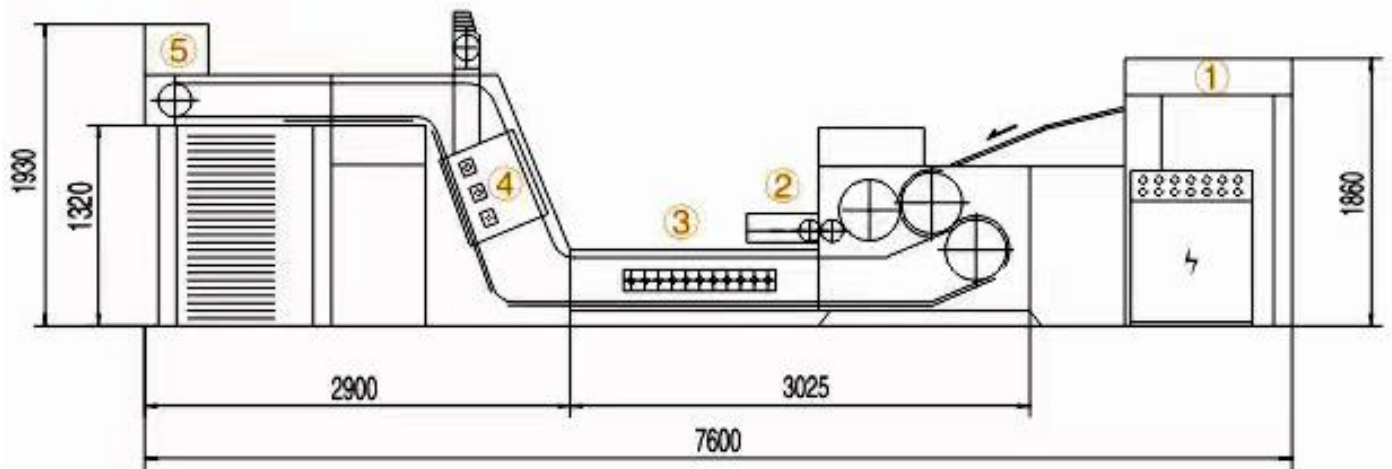

Down stacker



Feeding bridge



Electrical cabinet

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657



SGJ-UI1100/1300

Series Full Automatic UV Spot Coating Machine

Technical Specifications

Model	SGJ-UI1100	SGJ-UI1300
Max. sheet size	800x1100mm	800x1285mm
Max. coating area	760x1060mm	800x1260mm
Min. sheet size	307x440mm	307x440mm
Max. working speed	5000sph	5000sph
Total electric consumption	51kw	51kw
No. x UV power	3x9.75kw	3x9.75kw
No. x IR power (optional)	15x1.5kw	15x1.8kw
Paper weight	80-450g/m ²	80-450g/m ²
Weight	8.4t	9.3t
Overall dimensions	7602x2783x2150mm	7602x2983x2150mm

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO

Jl. Terusan Bandengan Utara No.16 / B 3-4

Jakarta, 14450, Indonesia

Tel. (021) 660 2665, 661 8255.

Fax. (021) 668 5874, 660 2657

