


LY-2012

Intelligent Fully Automatic Rigid Box Making Machine

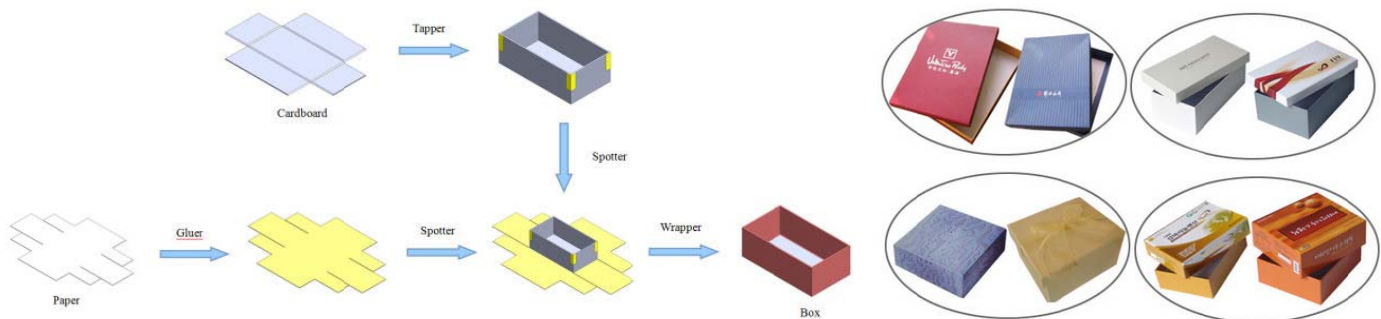

Machine Introduction

To meet the demand of the market, LISHUNYUAN bases on decades of packaging machine design and manufacture experience, with more than 2 years independent R&D, ceremoniously launch true intelligent rigid box making machine, greatly solve common faults of the rigid box making machines on current market, like bubble, scratch, loose side, low turn-in depth, uneven gluing, inaccuracy positioning, time-consuming mold change, etc. Suitable for making rigid boxes, like phone box, cosmetic box, jewelry box, win box, cake box, tea box, etc.

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657

34 YEARS
SERVING
INDONESIA

Features:

1. Intelligent adjusting, quick mold changing, suitable for producing various models of rigid boxes one day.
2. Adopts high precision ceramic coated gluing rolls with heating tubes inside, small glue consumption, gluing thin and even, great resolve the problems of poor liquidity in cold weather seasons, glue drawing, insufficient adhesion, etc.
3. Adopts servo optical fiber positioning system, high positioning accuracy ($\pm 0.2\text{mm}$).
4. With memory function, can recall previously produced box parameters to start production within 1 minute after assemble the molds.
5. Box pressing time can be randomly adjusted, all heads adopt independent servo control system, each head can go up and down, can make arbitrary angle rotation. The finished boxes without bubble, slack edge, scratch and blade streak, can obtain elegant appearance.
6. When wrapping, the holding device hold the box up, ensure not to scratch the wrapping paper.
7. High turn-in depth, can make different shape boxes, like high-low boxes, trapezoidal boxes, window boxes, etc.
8. Simple starting up, easy operation.

Technical Specifications

Model	LY-2012
Paper size (AxB)	Wmin 95 mm, Wmax 600 mm, Lmin 180 mm, Lmax 880 mm
Paper thickness	80-250 g/m ²
Max. paper stacking height	300 mm
Max. cardboard stacking height	930 mm
Cardboard thickness	1-3 mm
Finished box size (WxLxH)	Lmin 100 mm, Lmax 600 mm, Wmin 60 mm, Wmax 400 mm, Hmin: 12 mm, Hmax:150 mm
Turn in paper size	Rmin 7 mm, Rmax 90 mm
Ear cross ear folding size	Max 150 mm
Positioning	± 0.2 mm
Production speed	1 time folding 20-25 pcs/min, 2 time folding 18-20 pcs/min, 3 time folding 15-18 pcs/min, 4 time folding 12-16 pcs/min
Air pressure	6-8 MPa
Glue tank capability	50 Kg
Max. power	22 KW / 380 V / 3 Phase
Constant power	16 KW
Machine weight	5800 Kg
Machine dimension	L6800 x W4200 x H3400 mm

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657

34 YEARS
SERVING
INDONESIA