

ES-650PC

Fully Automatic Folder Gluer




Packaging Machine

Folder Gluer

01 Description

ES-650 is specially indicated for small to medium packaging companies, commercial printers and finishers. Can run from small to medium sized boxes. The simple but clever design of ES series makes it ideal for those who are new on the folding and gluing but at the same time will exceed the expectations of the most experienced. The standard machine comes with accessories for straight line and crash-lock bottom boxes.

02 Components

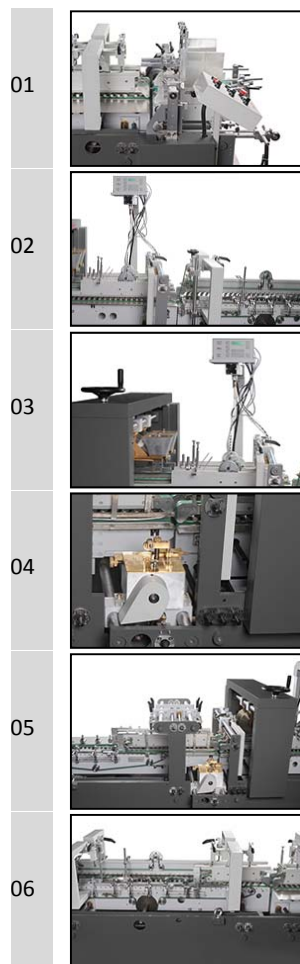

Feeder table

- Continuous friction Feeder with variable speed.
- Adjustable electronic pile vibrator.
- Lateral feed gates fully adjustable to the width of the blank.
- Two adjustable front-feed knives.

Pre folding section

- Left hand glue flap pre-folder up to 180°.
- Third crease line pre-folder up to 135°.
- 1st and 3rd crease openers.

Crash lock bottom section

- Complete set of folding hooks and helixes to fold the front flaps of the blank smooth and accurately.
- Set of accessories for B-type lock bottom.

Lower gluing unit

- Two lower (left and right) gluing tanks.
- Easy to remove and clean.

Upper gluing unit

- Double upper gluing system by disc.
- Easy to remove and clean.

Folding and Closing section

- Smooth and accurate folding of 2nd and 4th creases.
- Outer folding belts adjustable up to 180° with variable speed.
- Two upper and two lower carriers with 20 mm lower and 20 mm outer belts.
- Width-wise adjustable heavy duty compression rollers.

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.




PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657



30 TAHUN
MELAYANI INDONESIA
Anniversary 1982-2012

ES-650PC

Fully Automatic Folder Gluer



Trombone section

- Upper and lower drive mechanism for length adjustment.
- Equipped with automatic belt tension-adjusting system.
- Continuous and automatic box collection mechanism that ensures a neat transfer to the Press section, guaranteeing a well aligned flow.


Press section (Delivery section)

- Manual and automatic speed variation in coordination with a photocell.
- Upper section moves back and forward, allowing for different box length.
- 3.2 meters total length with 2 meter effective pressure length.



03 Technical Specification

Model	ES-650
Paper weight	Cardboard, N, E & F flute corrugated board
Thickness of cardboard	180-800g
Max Speed (m/min)	280
Box Width (mm)	60-650
Power (kw)	8.6
Dimension (LxWxH/mm)	11000 x 1300 x 1350
Gross Weight (kg)	3400

Floor Plan

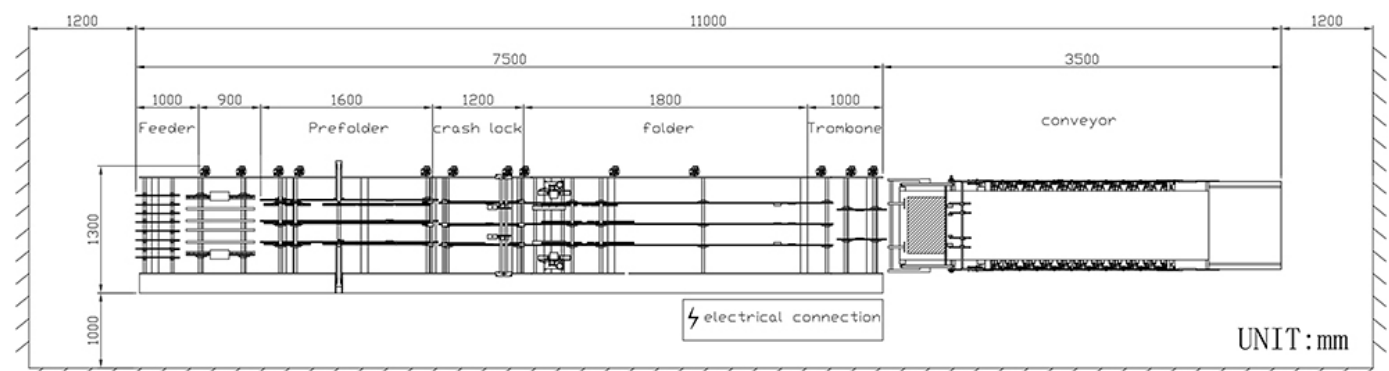

Box Size



Straight box

A: 80-650 mm
B: 50-600 mm

Lock-Bottom Box

A: 130-650 mm
B: 600 mm
C: min. 60 mm
D: 20-150 mm

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657



30 TAHUN
MELAYANI INDONESIA
Anniversary 1982-2012