




Machine Introduction

The machine is composed of printing part, take-off set machine and UV dryer. It is a $\frac{3}{4}$ automatic line which the printing stock is fed by hands taken off automatically. After the printing finished and the printing arm put up, the mechanism arm of take off set machine will extend into between the arm and the plane, suck and pull out the printing stock, then send it to next working procedure (drying, solidify or collection). It's not only can save the man, but also improves the using efficiency of the machine. If is fit for the flexible material, such as paper product.

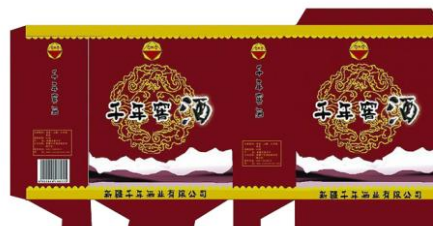

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657

35⁺ YEARS
SERVING
INDONESIA

Technical Specifications

Screen Printing Part	
Model	JB-1280 II
Top Speed	900 PCS/h
Space of Printing Paper	1200x800mm
Paper Weight	Below 500g/m ²
Power	16.89KW
Weight(about)	1650KG
Overall Dimension	7100x1400x1850mm
Take –off Set	
Model	JB-900CL
Top Speed	1200pcs/h
Paper Weight	Below 400g/m ²
Specs of Paper	820mm(V)400g
Power	220V 290W
Weight	400kg
Overall Dimension	2200x1100x1100mm
Model	JB-800B
Effective solidify width	800mm
Delivery speed	0-35m/min
UV lamp power	5.6kw x 2
Power	380V 1.5kw 375W
Weight	550kg
Overall Dimension	2200x1050x1200mm

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
 Jl. Terusan Bandengan Utara No.16 / B 3-4
 Jakarta, 14450, Indonesia
 Tel. (021) 660 2665, 661 8255.
 Fax. (021) 668 5874, 660 2657

35⁺ YEARS
SERVING
INDONESIA