


SJFM 800-1800

High-speed Extrusion Film Laminating Machine


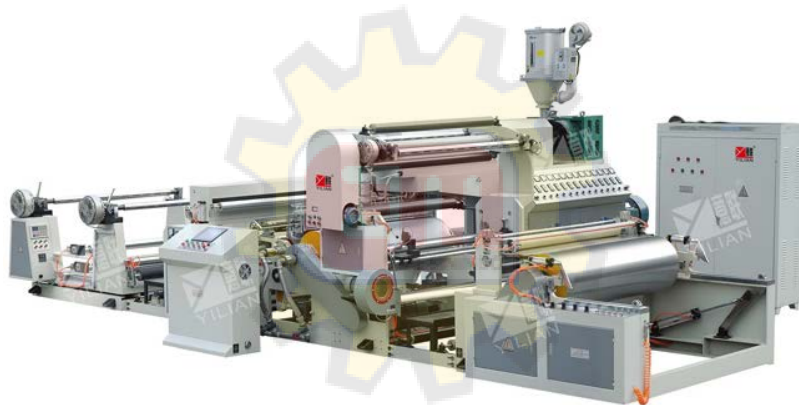


Graphic Machinery

Laminating Machines

01 Description

This series of machines, its products use paper/plastic film/woven fabric or aluminum foil as substrate, through coating film one time compounded to be two-layer/three-layer (sandwich composite) or multi layer become new products. This new product used to make packing products, for example: paper cup / drinking cup / ice cream cup / noodle bowl / forage packing bags / adhesive tape / snack box and non-woven bags.



02 Features

- 01 This machine is adopt PLC man-machine interface centralization of control.
- 02 It's integrally designed with machine, electricity and gas system.
- 03 It is adopt T-die with high precision, high speed and efficient mixing screw, the swift-changer hydraulic screen, the sandwich unwinding frame which can rotate within 360-degree.
- 04 This machine can be suitable assembled with a single extruder, double extruders, multi extruders to realize multi-layer co-extruding.

03 Technical Specification

Model	SJFM-800	SJFM-1100	SJFM-1300	SJFM-1600	SJFM-1800
Length of die lip	900mm	1200mm	1400mm	1800mm	2000mm
Width of finished product	400-700mm	500-1000mm	600-1250mm	800-1500mm	900-1700mm
Max. compounding speed	100-150m/min	100-150m/min	100-150m/min	100-150m/min	100-150m/min
Thickness of shower film	0.01-0.1mm	0.01-0.1mm	0.01-0.1mm	0.01-0.1mm	0.01-0.1mm
L/D ratio for screw	φ 80mm x 30	φ 95mm x 30	φ 105mm x 30	φ 120mm x 32	φ 140mm x 32
Max. diameter for roll unwinding and rewinding	φ 1300mm	φ 1300mm	φ 1300mm	φ 1300mm	φ 1300mm
Overall size	960x600x320cm	960x700x320cm	960x800x320cm	960x900x320cm	960x1200x320cm
Power	60kw	70kw	80kw	100kw	130kw
Compounding/glossy cool roll	φ 510mm	φ 510mm	φ 510mm	φ 510mm	φ 610mm



PT. EKA MAJU MESININDO
 Jl. Terusan Bandengan Utara No.16 / B 3-4
 Jakarta, 14450, Indonesia
 Tel. (021) 660 2665, 661 8255.
 Fax. (021) 668 5874, 660 2657



30 TAHUN
MELAYANI INDONESIA
Anniversary 1982-2012