




Partial Introduction

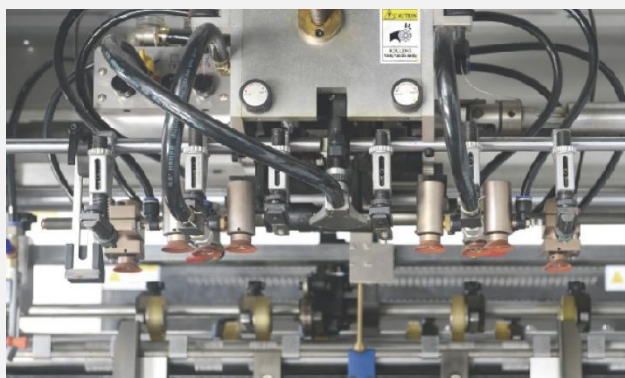

Feeder unit

Four pick up and four forward suck heads with angle adjustment to handle different kinds of materials.



Feeding table

Synchronizing device to adjust the sheet positioning to the front lay by hand during production, sheet hold-down device (guiding the sheets to the front lays).

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO

Jl. Terusan Bandengan Utara No.16 / B 3-4

Jakarta, 14450, Indonesia

Tel. (021) 660 2665, 661 8255.


Fax. (021) 668 5874, 660 2657






Hot stamping unit

Heating base with 20 heating zone each temperature adjustable individually for efficient and accurate temperature control.

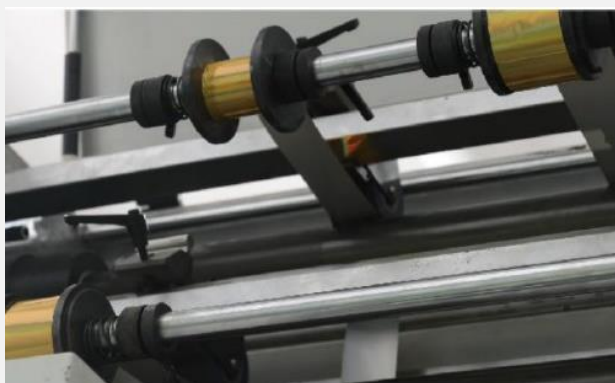


Foil advancing unit

Three sets of longitudinal foil advancing shafts and two sets of lateral foil advancing shafts are driven by servo motors individually programmable for short and long foil stepping.

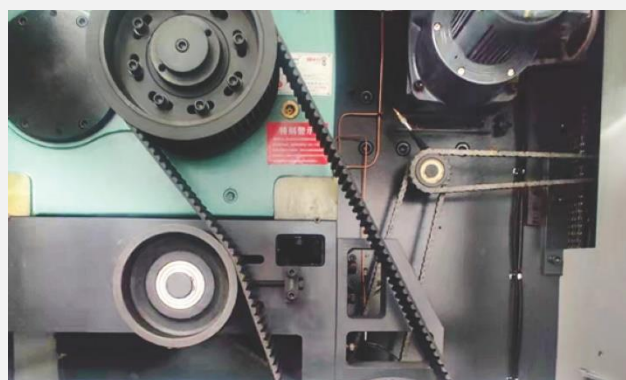

Timing belt driven device

Taiwan high precision intermittent segmentation ensure high positional precision for long time usage.

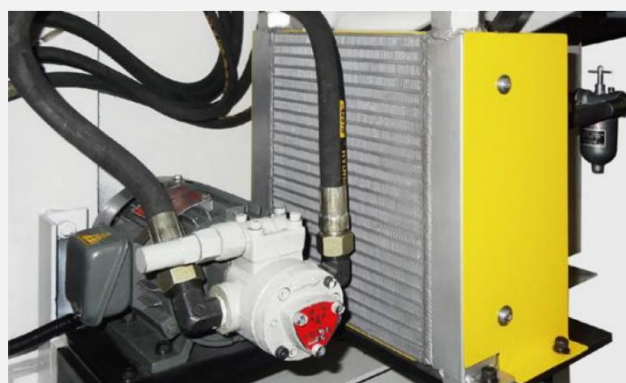

Main motor lubrication system

Taiwan made automatic oil pump cooling circulation system to ensure main motor lubrication of high speed for a long time. Equipped with oil pressure gauge and with oil pressure alarm device.

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO

Jl. Terusan Bandengan Utara No.16 / B 3-4

Jakarta, 14450, Indonesia

Tel. (021) 660 2665, 661 8255.

Fax. (021) 668 5874, 660 2657





Paper collecting unit

Automatic delivery with non-stop curtain. This curtain moves into delivery to catch the arriving sheets during the pile exchange. Two blowers for paper collecting can ensure neat collection of thin and thick paper.



Electrical unit

Adopts electrical components of world famous Brands (MOELLER\OMRON) for better performance and in time and local after-sale-service and maintenance.



Auto lubrication system

Adopt concentrated auto lubrication system to make sure the driven parts working better.

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.

Technical Specifications

Model	MHC-1080AT
Max. sheet size	1080x780mm
Min. sheet size	400x350mm
Max. cutting size	1070x770mm
Max. hot stamping size	1070x770mm
Max. embossing Area	1070x770mm
Min. gripper margin	9-17mm
Inner chase size	1100x790mm
Stock range	Paper: from 90 to 2000g/m ² , 0.1~2mm, corrugated board: up to 4mm
Die cutting accuracy	≤±0.1mm
Common stamping accuracy	≤±0.1mm
Hologram positioning stamping accuracy	≤±0.1mm (optional)
Embossing accuracy	≤±0.1mm
Max. die cutting force	600T
Max. working speed	7500s/h (Die cutting) 7500s/h (Hot stamping) 7500s/h (Hot pressing)
Max. feeder pile height	1600mm (with wooden pallet)
Max. delivery pile height	1400mm (with wooden pallet)
Max. gold foil diameter	250mm (longitudinal), 200mm (transversal)
Electric-heated system	20 temperature ranges, 40-180°C is adjustable
Foil width	20-1020mm
Machine Dimensions (LxWxH)	7314x4307x2673mm (L: paper prepared track included, W: platform included)
Net weight of machine	20.5T
Main motor wattage	15kw
Full load wattage	52kw
Air requirement	Pressure:0.6~0.7Mpa, Flow:≥0.37m ³ /min (prepared by user)

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.

**PT. EKA MAJU MESININDO**

Jl. Terusan Bandengan Utara No.16 / B 3-4


Jakarta, 14450, Indonesia

Tel. (021) 660 2665, 661 8255.

Fax. (021) 668 5874, 660 2657



Drawing

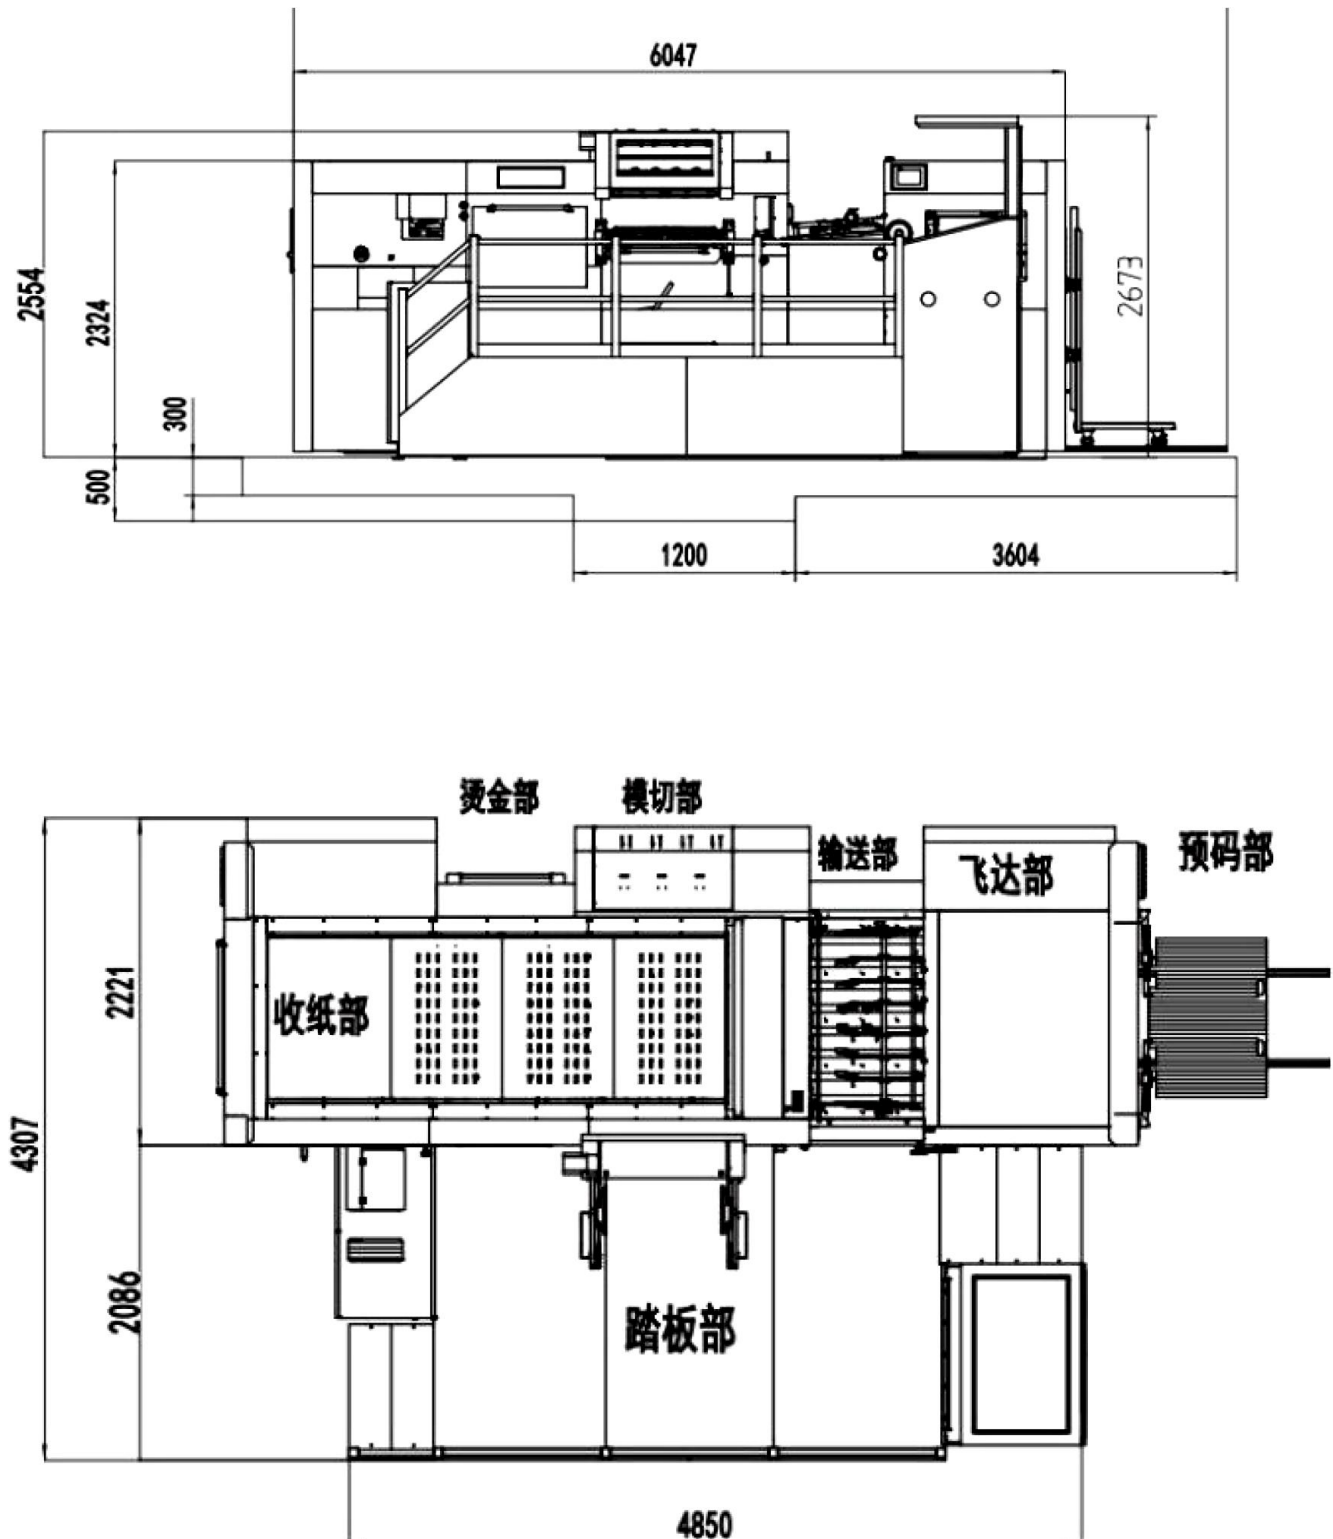

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
 Jl. Terusan Bandengan Utara No.16 / B 3-4
 Jakarta, 14450, Indonesia
 Tel. (021) 660 2665, 661 8255.
 Fax. (021) 668 5874, 660 2657

