




Machine Introduction


Models ZKT-340 Window Patching Machine are widely used for sticking films on the windows of various paper boxes, e.g tissue box, medicine box, shirt box, etc. It is developed on the original window patching machine in light of customers' requirements. Our research and development team, through the continuous improved & perfect human design, let the machines be easier to operate and better in efficiency, accuracy and stability. Both basic components and major automated accessories employ the proprietary technology of this company. Therefore, 340Window Patching Machine can meet customers' requirements at a higher level.

Machine Features

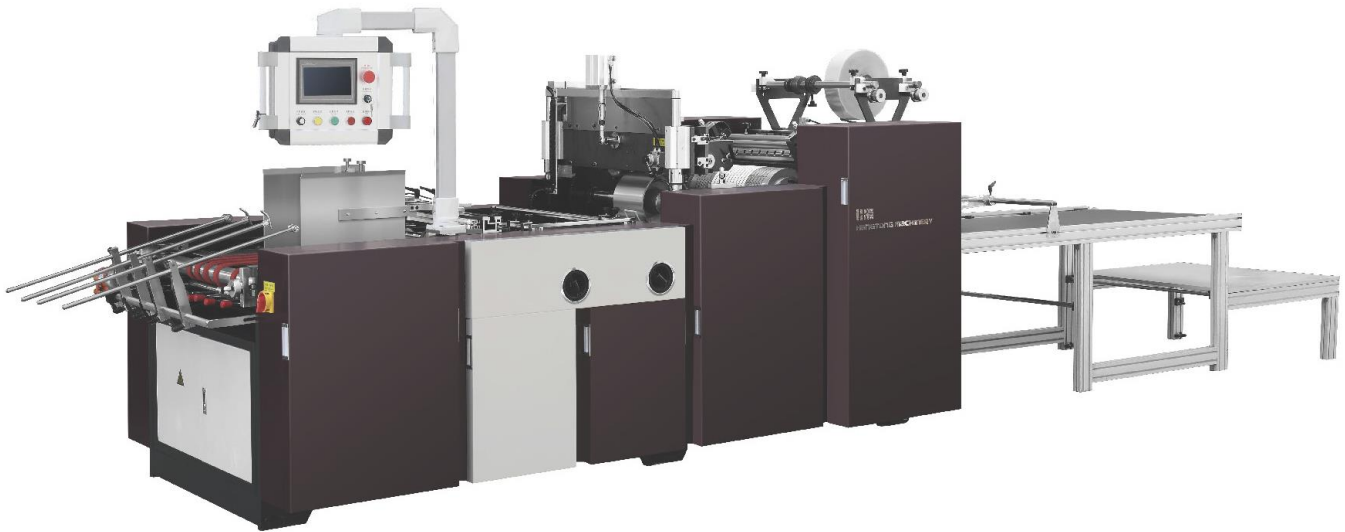

Paper Feeder

Flat belt paper suction mechanism, paper feeding without shutting down the machine, position checking mechanism and accurate locating.

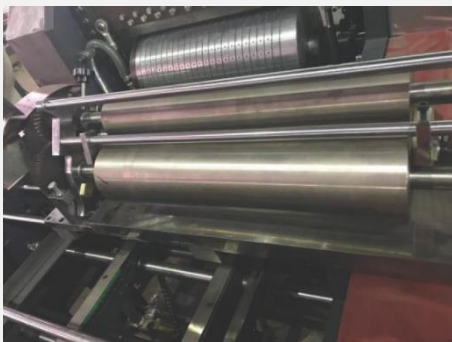

The Gluing Section


Disk glue applying mode is adopted to ensure applied glue is well distributed and the amount of applied glue can be effectively controlled.

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657



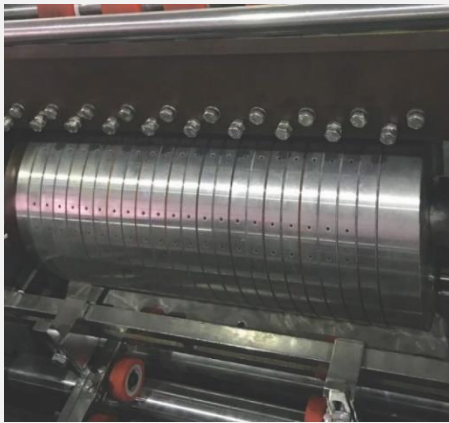

Film Cutting

Horizontal knife cutting film, stable and reliable.



Function

The meticulously designed fine adjustment device of ZKT series window patching machines is convenient for adjustment.

Technical Specifications

	Paper Length: 100 - 330mm	Paper Caliper: Paper box & cardboard box 250-1000g/m2, Corrugated/flute up to 3mm	Single line Speed: 4000-12000pcs/h
	Paper Width: 120 - 420mm		
	Film Length: 60 - 120mm	Film Thickness: 0.03 - 0.25mm, OPP, PVC, PET, PE etc.	

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO


Jl. Terusan Bandengan Utara No.16 / B 3-4


Jakarta, 14450, Indonesia

Tel. (021) 660 2665, 661 8255.

Fax. (021) 668 5874, 660 2657



	Film Width: 30 - 160mm	Film Thickness: 0.03 - 0.25mm, OPP, PVC, PET, PE etc.	Single line Speed: 4000-12000pcs/h
Power of Pump: 0.75 kw, Main Power: 1.5 kw			
Net Weight: 1200 kg, Gross Weight: 1500 kg			
External Dimension: 3550*950*1400 mm			

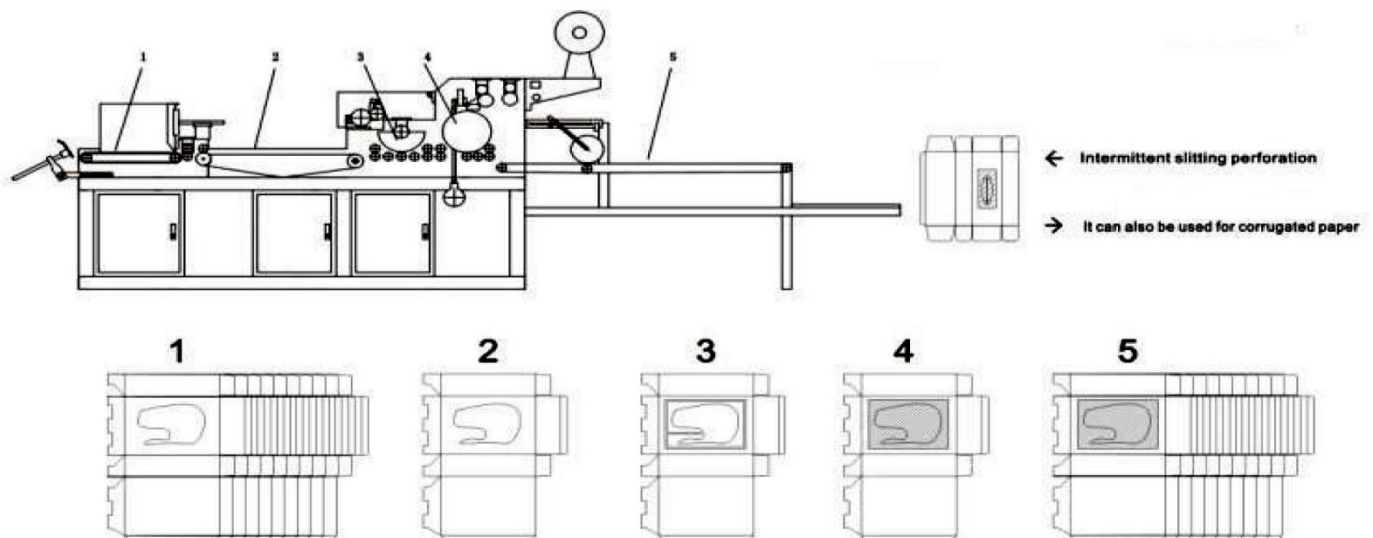

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657

