



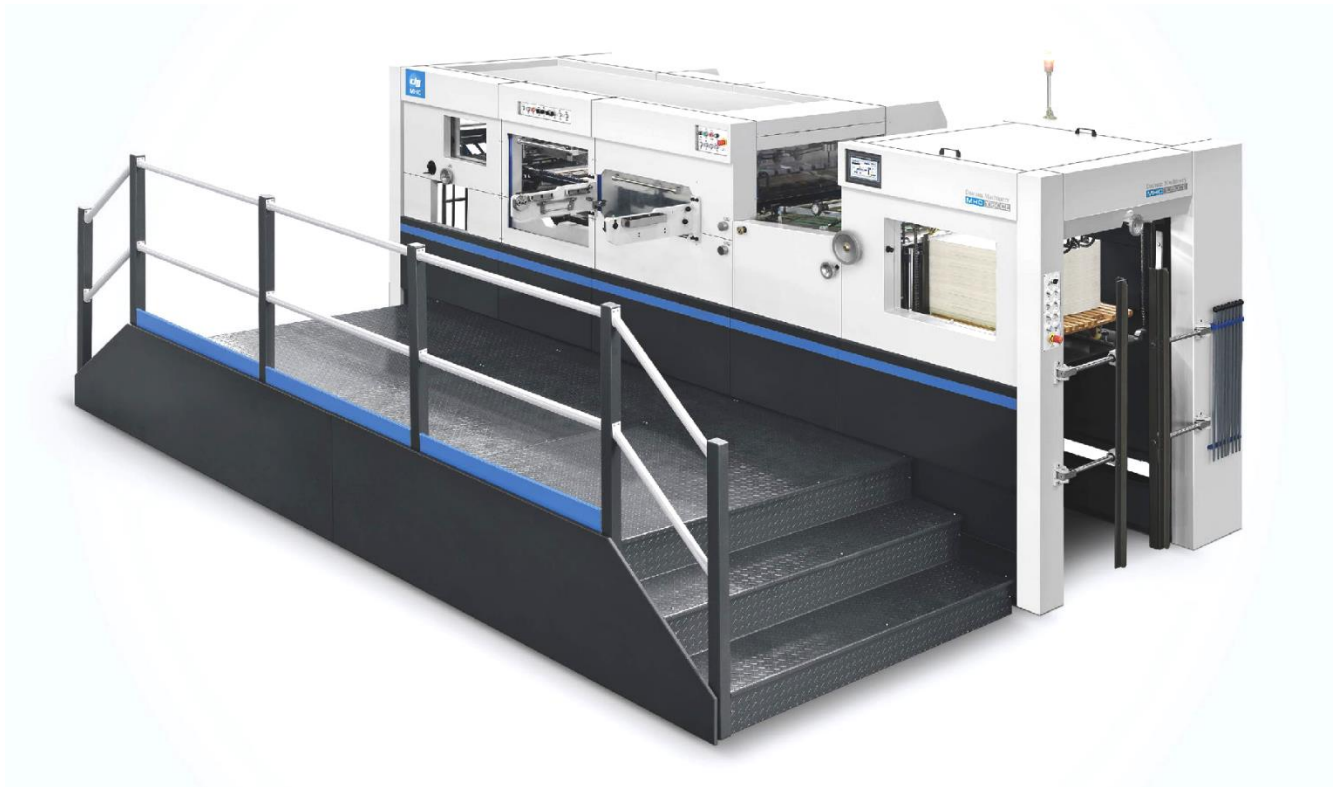

Partial Introduction

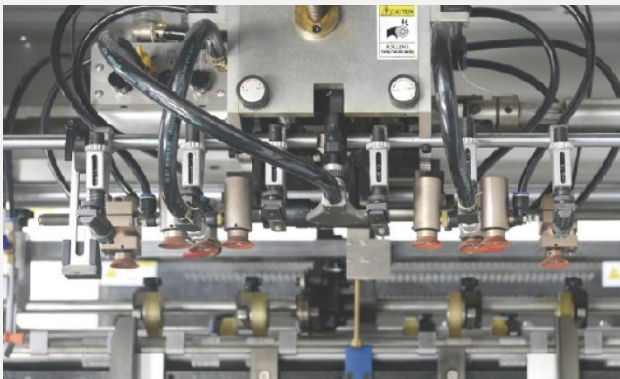

Feeder unit

Four pick up and four forward suck heads with angle adjustment to handle different kinds of materials.



Feeding table


Synchronizing device to adjust the sheet positioning to the front lay by hand during production, sheet hold-down device (guiding the sheets to the front lays).

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657



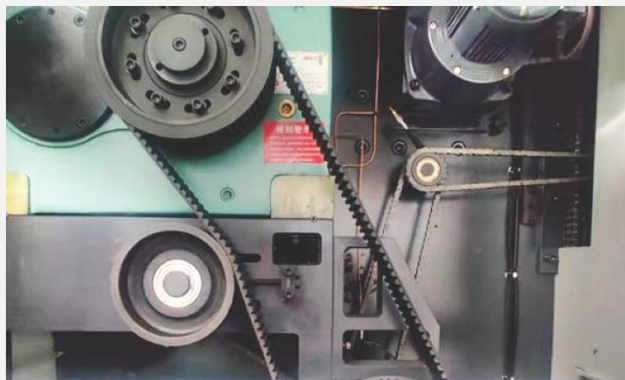


Timing belt driven device

Taiwan high precision intermittent segmentation ensure high positional precision for long time usage



Paper collecting unit

Automatic delivery with non – stop curtain. This curtain moves into the delivery to catch the arriving sheets during the pile exchange. two blowers for paper collection can ensure neat collection of thin and thick papers.

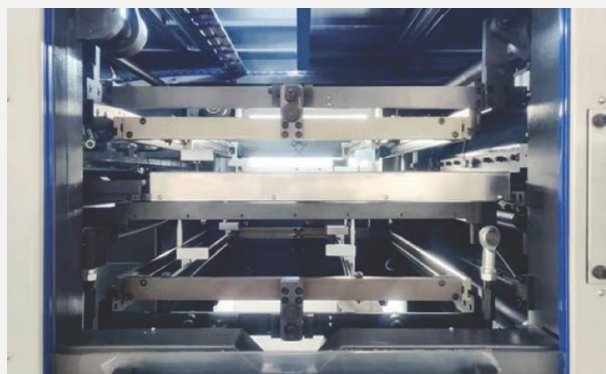

Stripping unit

Adopt centre line system, Upper and lower stripping tool mounting frame can be pulled out for job set up and make ready.



Auto lubrication system

Adopt concentrated auto lubrication system to make sure the driven parts working better.

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO

Jl. Terusan Bandengan Utara No.16 / B 3-4

Jakarta, 14450, Indonesia

Tel. (021) 660 2665, 661 8255.

Fax. (021) 668 5874, 660 2657



Technical Specifications

Model	MHC-1080CE
Max. sheet size	1080x780mm
Min. sheet size	400x350mm
Max. cutting size	1070x770mm
Min. gripper margin	9-17mm
Inner chase size	1100x790mm
Stock range	Paper: from 90 to 2000g/m ² , 0.1~2mm, corrugated board: up to 4mm
Die cutting accuracy	≤±0.1mm
Max. die cutting force	300T
Max. working speed	7500s/h
Max. feeder pile height	1600mm (with wooden pallet)
Max. delivery pile height	1400mm (with wooden pallet)
Machine Dimensions (LxWxH)	7313x4257x2367mm (L: paper prepared track included, W: platform included)
Net weight of machine	18T
Main motor wattage	11kw
Full load wattage	16.9kw
Air requirement	Pressure:0.6~0.7Mpa, Flow:≥0.37m ³ /min (prepared by user)



* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657



Drawing

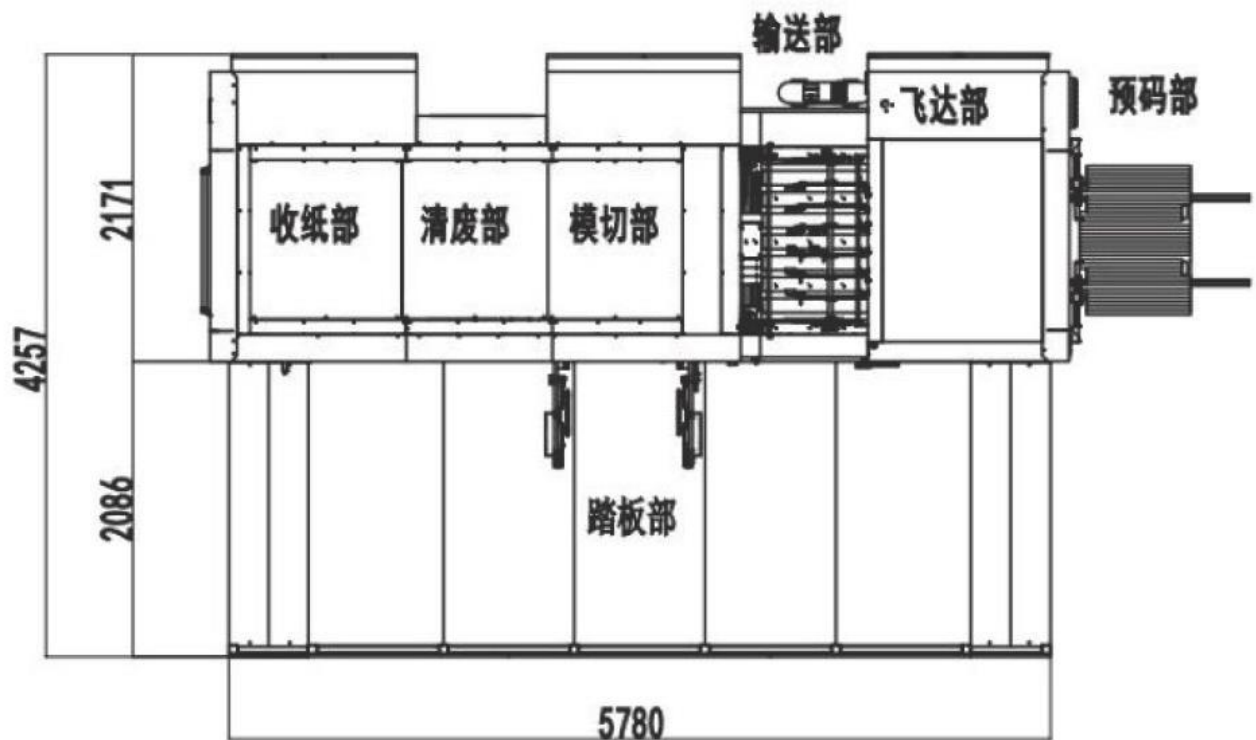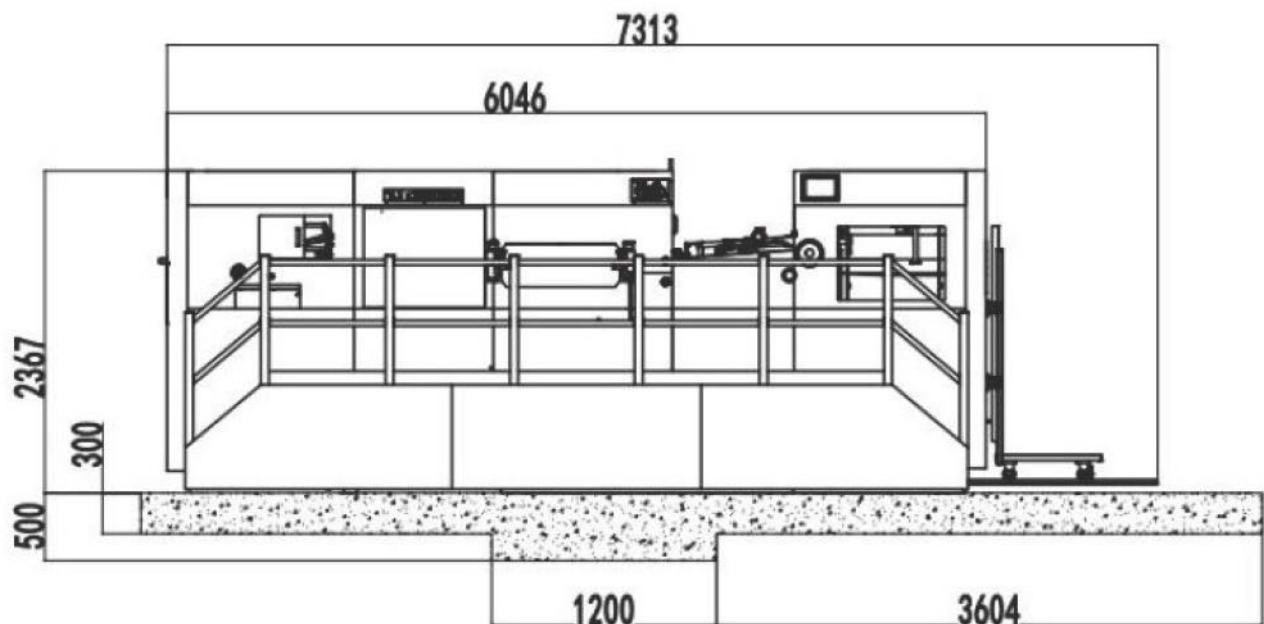

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657

