



Machine Introduction

This machine adopts mechanical, electrical, optical and pneumatic integration technology, it's an advanced equipment and has the function of automatic handle loop bonding (speed up to 75pcs/min, equal to 5 worker's bonding speed or 5 handle loop bonding machine).

Different size of handle bag, D-cut bag, shoes bag, T-shirt bag and box bag can be made by this machine, widely applied to the packaging of garment, shoes, wine, gift etc. Reduce the manpower and manufacturing cost by replace the traditional manual work. It's hot selling equipment all over the world.

Features:

This machine adopts good quality PLC (programmable logic controller) touch screen, which can be edited. Auto counting and stopping when setting numbers freely; High voltage static processor and auto constant temperature heating controller; Equipped with stepping motor(computer fixed length), manual unwinding magnetic powder tension controller and auto rectifying deviation, photoelectric tracking, printing color mark track orientation, auto counting and alarming , auto punching and auto bonding handle etc., which make it accurate and stable, firm sealing and beautiful products; All of the bags adopts thermal bonding by ultrasonic welding, such as bag mouth folding, side sealing etc. which makes the machine fast and easy to operate;

Product Samples:



Handle bag box type



D-cut bag



Shoes bag

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657

36 YEARS
SERVING
INDONESIA



D-cut bag box type




Handle bag flat type



Sheets with handle attached for manual bag

Process:

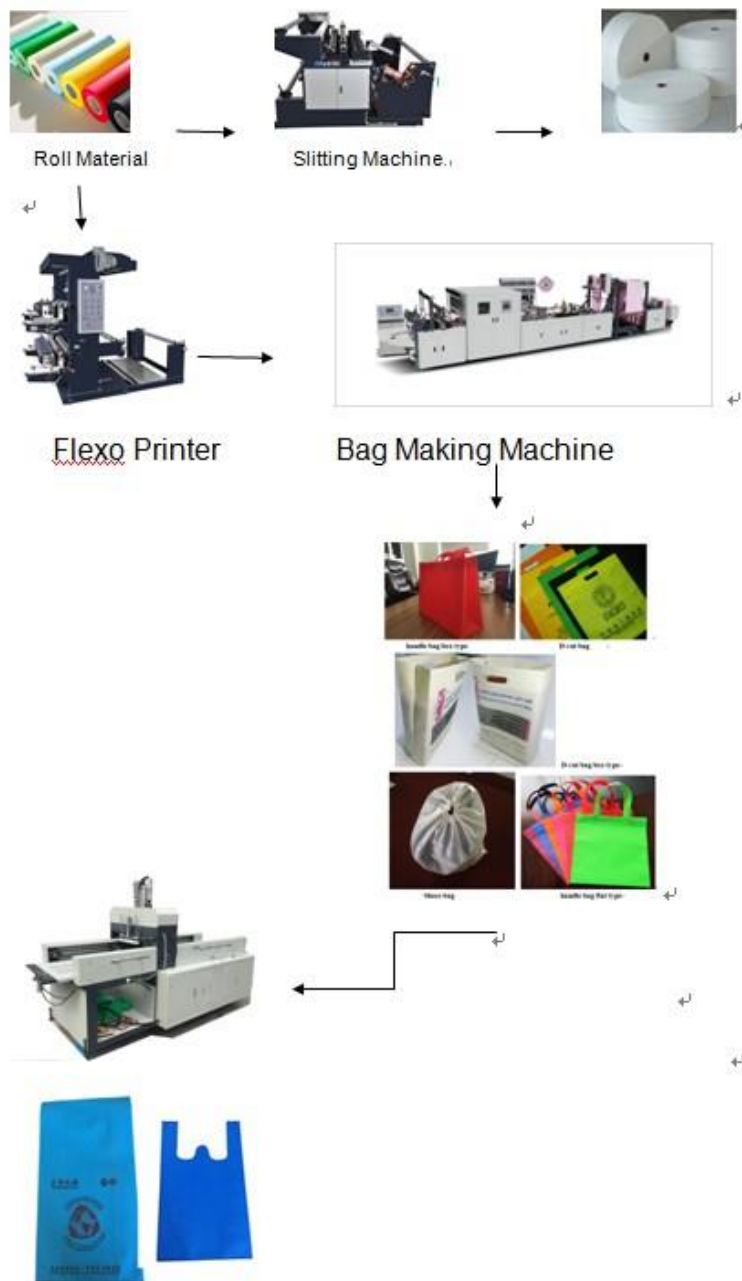

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
 Jl. Terusan Bandengan Utara No.16 / B 3-4
 Jakarta, 14450, Indonesia
 Tel. (021) 660 2665, 661 8255.
 Fax. (021) 668 5874, 660 2657

36 YEARS
SERVING
INDONESIA

Technical Specifications

Model	ZXL-E700
Bag Width	100-800mm
Bag Height	200-580mm
Handle Loop Length	380-600mm
Bag Material Basis Weight(thickness)	35-100g/m ²
Handle Material Basis Weight(thickness)	60-100g/m ²
Production Speed	20-120pcs/min
Handle Bonding Speed	30-75pcs/min
Power Supply	380v/220v
Total Power	18kw
Overall Dimension	11500*2600*2100mm
Weight	4000KG

Configuration Items

Item	Power	Qty	Brand
touch screen of main machine		1	Taiwan
Motor converter of main machine		3	Dovol
motor driver of main machine		2	Domestic
DC motor speed regulator		2	Domestic
relay of main machine		3	France Schneider
touch screen of handle attaching machine		1	Taiwan
motor driver of handle attaching machine		3	Domestic
DC motor speed regulator of handle attaching machine		2	Domestic
main reducing motor	1.5KW	1	Oubang
AC motor of unwinding	0.75KW	1	Domestic
Gusset making speed AC motor	0.75KW	1	Domestic
stepping motor of creasing for box bag		1	Soyo
stepping motor for main machine feeding		2	Soyo
stepping motor of feeding for handle attaching machine		1	Soyo
Stepping motor of pushing for handle attaching machine		1	Soyo
DC motor of main machine		2	Domestic
DC motor of handle attaching machine		2	Domestic
D-cut punching unit		1	Domestic

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
 Jl. Terusan Bandengan Utara No.16 / B 3-4
 Jakarta, 14450, Indonesia
 Tel. (021) 660 2665, 661 8255.
 Fax. (021) 668 5874, 660 2657


36 YEARS
SERVING
INDONESIA

punching unit for box bag triangle removing		1	Domestic
magnet power tension controller	5KG	1	Domestic
rectifying deviation control box		1	Domestic
rectifying deviation motor		2	Domestic
ultrasonic systems for edge folding (horn 70MM)		2	Homemade
ultrasonic system for T-shirt bag side sealing (horn 70MM)		1	Homemade
150MM ultrasonic system for triangle sealing of box bag (horn 153MM)		1	Homemade
ultrasonic systems for handle attaching (horn 55/30MM)		6	Homemade
300MM ultrasonic systems for the main side sealing (horn 300MM)		2	Taiwan Mingyou
Main elements of electrical and pneumatic: CHNT and Taiwan AirTac			


ZXL-E700 Functions

Unwinding: Auto feeding, photocell eye tracking and rectifying deviation, manual magnet powder tension control, edge folding and manual ball screw adjust, edge sealing by ultrasonic welding.

- Edge folding 20MM to 80MM
- Custom made round embossing mould
- Horn journey max 70mm
- Max diameter of unwinding 1000MM
- Max width of unwinding 1300MM

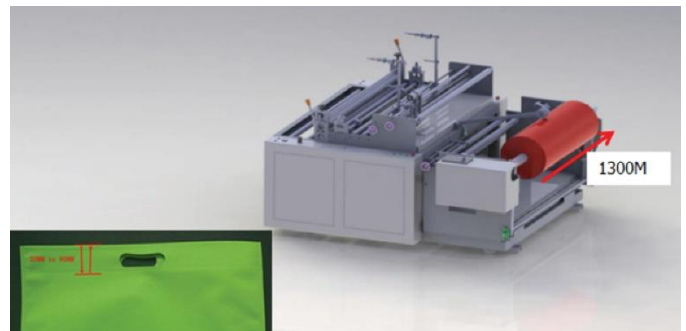


Folding rack: non-woven fabric cross folding device, easy adjustment, which make the bog mouth neat and tidy even without moving the whole machine.

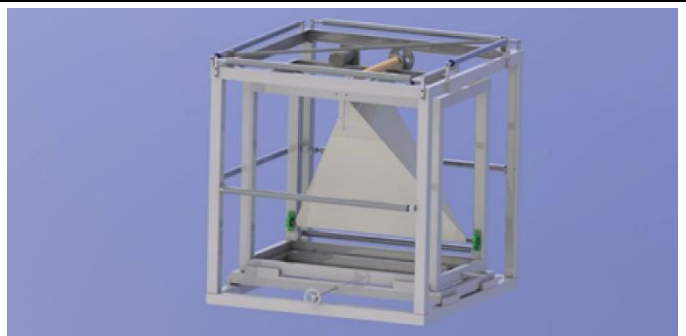

Gusset making feeding and computer length fixed by 1st stepping motor, photocell eye tracking, bottom and side gusset making, and the side sealing of T-shirt bag by ultrasonic.

- Bag gusset from 60MM to 160MM

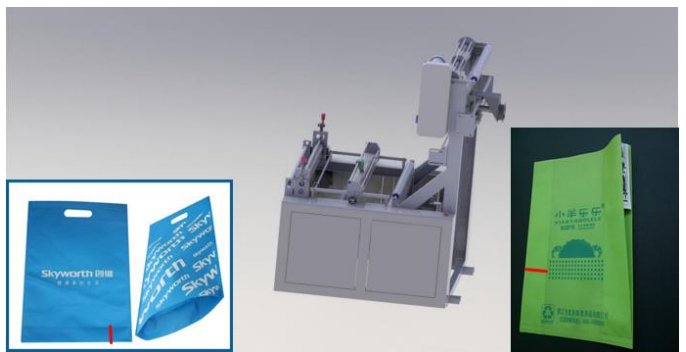

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
 Jl. Terusan Bandengan Utara No.16 / B 3-4
 Jakarta, 14450, Indonesia
 Tel. (021) 660 2665, 661 8255.
 Fax. (021) 668 5874, 660 2657

36 YEARS
SERVING
INDONESIA

Box bag making: the function of box bag creasing, triangle sealing by ultrasonic, triangle removing by punching, PET film unwinding and rewinding and D-cut punching.

- Gusset size of box bag from 80MM to 160MM
- Custom made gusset size up to 300MM




Handle Attaching: automatic integration ultrasonic handle sealing device, adopts PLC motion control and touch screen man-machine interface, easy operation, auto stop when no material. Handle feeding and length fix by stepping motor, high stability, handle attaching speed up to 75pcs/min.

- Custom made embossing mould
- Width of handle 25MM to 30MM
- Width of handle feeding 50MM to 60MM
- Length of handle 380MM to 600MM
- Distance between two attaching spots from 110MM to 200MM



Adopts up-down rack to adjust the width of bags and main reducing motor to drive the motion of ultrasonic welding and cold cutting. Adopts two Taiwan ultrasonic welding system (horn 300MM), sealing is beauty and firm. And different specs of ultrasonic (horn 200MM/153MM, even roller sealing) can be used to meet the requirements of different specs of non-woven fabric.

- Double mould, horn journey 300MM
- Max side sealing (bag height) is 600MM
- Custom made square embossing mould

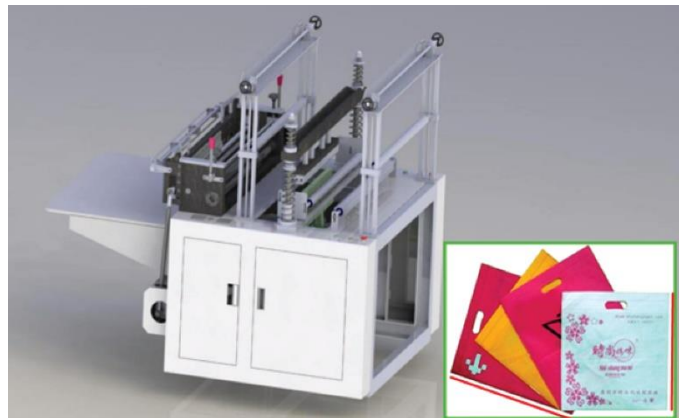

Distribution box: integrate all the electricity elements, adopts split-type design and PLC motion control as well as touch screen man-machine interface, easy operation and maintaining.

