


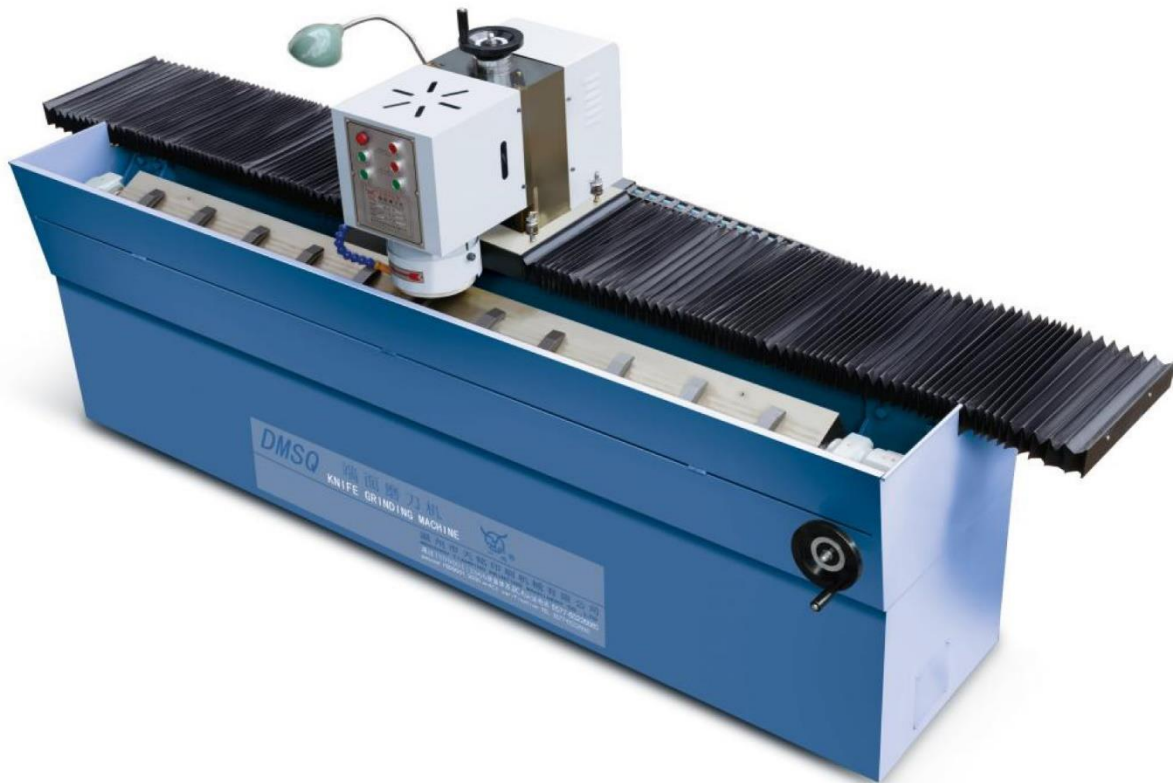

Machine Introduction

Plane Grinding Model DMSQ-Z II is the second-generation technological knife grinding equipment which is specially designed for grinding various lath-shaped plane blade. It adopts monolithic structures with beautiful and stable appearance and scientific structure. The quality of grinding knives is better than the knife grinder model DMSQ-I. It is an ideal for grinding equipment used the printing, paper, wood, plastic leather, toilet paper and other industries.

1. Main Function

1.1 Grinding wheel head

1. Grinding motor German East Y series three-phase asynchronous motor
2. Type Y80M2-4
3. Power 0.75KW
4. Rotation speed 1400r/min
5. Maximum grinding width taken 22° as final 180 mm

1.2 Fixed grinding head stroke speed

1. Grinding motor German East Y series three-phase asynchronous motor
2. Type YS7124-W
3. Power 0.55KW
4. Rotation speed 1400r/min

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657



1.3 Manual feed wheel: Feeding by the dial

1.4 Rack and pinion

1. Guarantee constant instantaneous transmission ratio, high stability
2. High transmitted power and large speed scope
3. Compact structure, accurate and reliable transfer motion, which can realize larger transmission ratio
4. Long lifetime, low noise

1.5 Cantilevered fuselage structure: machine bed is made by MF cast iron, grinding head works in the unilateral space of rail

1.6 Mechanical Knife sets

1.7 Worm drive tool holder: flexible and stable rotation, high transmission ratio, low noise. Line contact between two gear wheels, large carrying capacity. Self-locking, guarantee the safety.

1.8 Table rotation angle: $0 \sim \pm 90^\circ$

2. Main Function Deployment

2.1 Dovetail guide rail

1. Automatic self-aligning contributes to the smooth moves of high precision and stability
2. High rigidity in all directions, absorbing loads from up-bottom and left-right direction.

2.2 Dust cover configuration

1. It is made of non-woven fabrics and by high frequency hot seal and compression molding
2. It is capable of effective dust proof, waterproof, oil proof, lowering noise and improvement of work environment
3. It features acid and base proof as well as corrosion resistance to prolong service life
4. It is free of deformation under impact and shock, featuring high ratio of extension and compression

2.3 Scraper clam (optional, only applicable to paper equipment, extra fees needed)

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657



Technical Specifications

Model	DMSQ-ZII1600
Maximum grinding width	1680MM
Table size	1680MM
Table straightness error	0.03/1000mm
Grinding wheel dimension	φ200*100*φ150(mm)
Grinding head movement speed	6 m/min
Mode of Grinding head's cooling	Internal cooling system
Axis/longitude beat error of grinding head	0.005/0.01
Grinding rotation speed	1420r/min
Grinding motor power	1.5/2.2KW
Movement electromotor power	0.55KW
Coolant motor power	0.125KW
Blade straightness	0.04mm/1000
Machine tool appearance size and weight	
Grinding Angle adjustment	0~±90°

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657

