


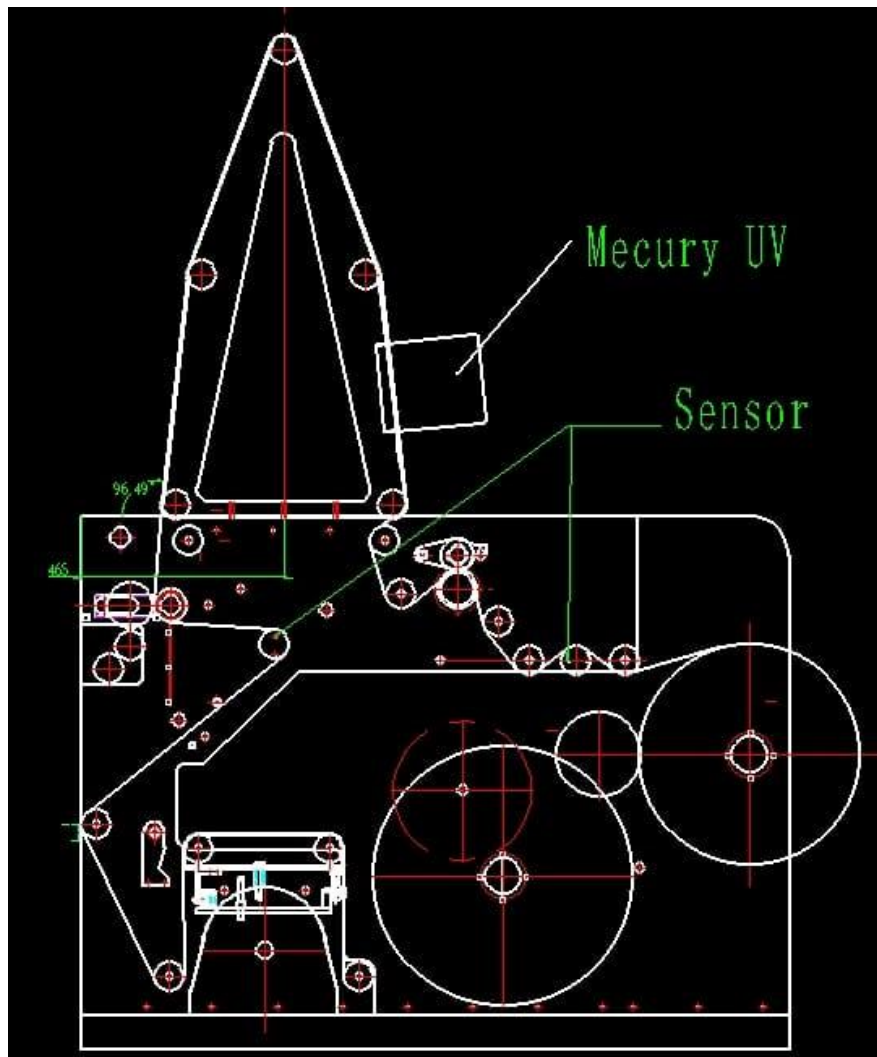

Machine Introduction

Main Machine with Standard Configuration (320mm, 1-colors, with high power UV dryer 1 sets, 1 web guiding, magnetic clutch for Un/rewinding, auto tension for un/rewinding, auto web guiding).

Features:

1. Adopt the ceramic anilox cylinder to transfer the ink.
2. Unwinding and rewinding tension are auto controlled by tension controller.
3. Each printing unit adopts 360° plate-adjustment.
4. UV dryer for each printing unit.
5. The ink rollers will be separated from the printing roller and keep running when the machine stopped.
6. The machine can finish material-feeding, printing, drying, rewinding in a lump. It is an ideal machine for printing note and top-grade adhesive label.

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657



Technical Specifications

Model	RYJ-320UV
Printing speed	80m/min
Printing color	1colours
Max. web width	320mm
Max. printing width	310mm
Max. unwinding diameter	600mm
Max. rewinding diameter	600mm
Printing length	178-355.6mm
Precision of chromatography	±0.1mm
Dimensions	1.85mX1.2m X2.0m (with UV dryer)
Machine weight	About 1500kg
Power supply	380V, 3P, 50/60Hz

Configurations

No	Name	Model	Qty	Unit
1	Turn bar	320	1	Set
2	Unwinding tension control	China	1	Set
3	Web-guiding	China	1	Set
4	Rewinding tension control	China	1	Set
5	Air shaft	3 inch	3	Piece
6	Adjusting handle for left/right		1	Set
7	Varnish roller	320	3	Piece
8	Ceramic	320	1	Piece
9	invert	2.2KV (Teco)	1	Piece
10	Simple mounting plate	320	1	set

Contactora: Schneider France
Center relay: Schneider France
Temperature Controller Yuyao in Zhejiang
All Switches: Schneider France
Other low-pressure wiring: Schneider, France/ yaohua, China

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657



Reference Picture



Separation of plate roller and anvil roller



Auto web guiding



Gears for anilox



Ink roller, anilox, plate roller



Inverter



Auto tension for Rewinding/Unwinding



Switch Box



Gears for precision parts



Magnetic brake for Re/Unwinding

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657

