

المعرض الوطني الثامن عشر للبحث العلمي والابتكار 2026

The 18th National Scientific Research and Innovation Exhibition 2026

12-14 MAY – ١٤-١٢ مايو



AI-Based Smart Swimming Pool Safety and Drowning Detection System



نظام ذكي قائم على الذكاء الاصطناعي لرصد حالات الغرق في برك السباحة



Introduction

- Drowning is a leading cause of accidental death globally, claiming an estimated 236,000 lives annually.
- It is the #1 cause of injury death for children aged 1–4 years.
- The Core Challenge: Drowning is silent (no splashing) and quick (4–6 minutes to brain damage).
- Human Limitations: Human lifeguards suffer from vigilance decrement (loss of focus) after just 30 minutes due to fatigue, glare, and distractions.

Objectives

- The goal is to engineer an autonomous, "unblinking" Digital Lifeguard.
- Develop a 24/7 continuous monitoring system using low-cost edge computing (no cloud needed).
- Detect dangerous immobility indicative of drowning within seconds.
- Identify unauthorized access by small children approaching the pool deck.
- Alert bystanders instantly with local high-intensity audio and visual warnings.

Core Operational Workflow

The system uses a defined logic loop to differentiate safe swimming from distress.



Figure 3 The algorithmic pipeline from detection to alarm trigger.

- ROI Masking:** A user-defined polygon isolates the water area, ignoring the pool deck to prevent false alarms.
- Velocity Tracking:** The system calculates the distance a tracked ID moves between frames.
- The Critical Threshold:** If velocity drops near zero for 60 consecutive seconds, the state changes to "DANGER."

User Interface & Detection Examples

The system provides real-time visual feedback.

The ROI masking screenshot (green polygon).

The final "Suspected Drowning" red box alert screenshot.

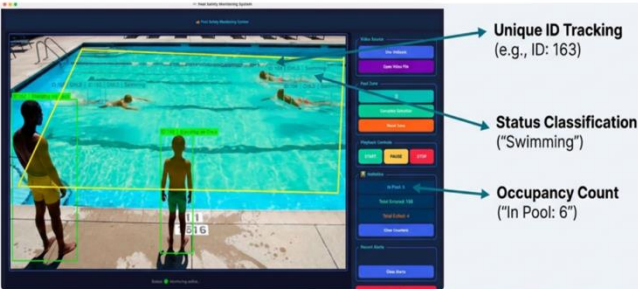


Figure 4: Region of Interest masking ensures focus on the water. The system detected immobility and triggers a visual Green alert.

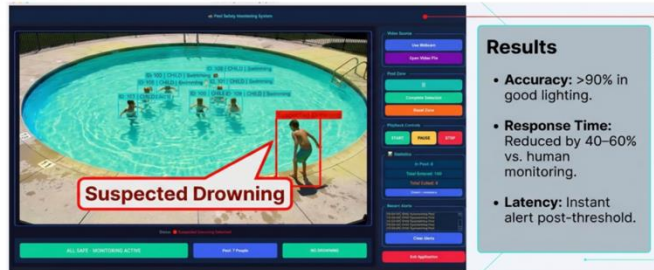


Figure 5: Region of Interest masking ensures focus on the water. The system detects immobility and triggers a visual red alert.

References

- Brenner, R. A., Taneja, G. S., Haynie, D. L., Trumble, A. C., Qian, C., Klinger, R. M., & Klebanoff, M. A. (2009). Association between swimming lessons and drowning in childhood. Archives of Pediatrics & Adolescent Medicine, 163(3), 203–210. <https://doi.org/10.1001/archpediatrics.2008.563>
- Jocher, G., Chaurasia, A., & Qiu, J. (2023). YOLO by Ultralytics (Version 8.0.0) [Computer software]. Ultralytics. <https://github.com/ultralytics/ultralytics>
- Raspberry Pi Foundation. (2023). Raspberry Pi 5 hardware specifications and technical documentation. Raspberry Pi Ltd. <https://www.raspberrypi.com/documentation/computers/raspberry-pi-5.html>
- Ridgers, N. D., McNarry, M. A., & Mackintosh, K. A. (2016). Feasibility and effectiveness of using wearable activity trackers in youth: A systematic review. JMIR mHealth and uHealth, 4(4), e129. <https://doi.org/10.2196/mhealth.6540>

Our Team

Student:

Ahmad Khalil AL-Bloshi, Jassim Yousef Ahmad

Supervisor:

Ahmad Mahmoud Abusal

Methodology

System Hardware

- We utilized an edge-computing approach to ensure speed and privacy.
- Processing Unit: Raspberry Pi 5 (high-performance localized AI processing).
- Vision Sensor: High-Resolution Wide-Angle Camera Module (mounted overhead).
- Output: GPIO-connected active buzzer and visual display interface.
- Housing: Custom 3D-printed, weather-resistant enclosure.



Figure 1: Hardware prototype showing the Raspberry Pi 5 compute unit and custom-designed housing. This Image Created by Team using MLNotebook.

Software Stack & AI Engine


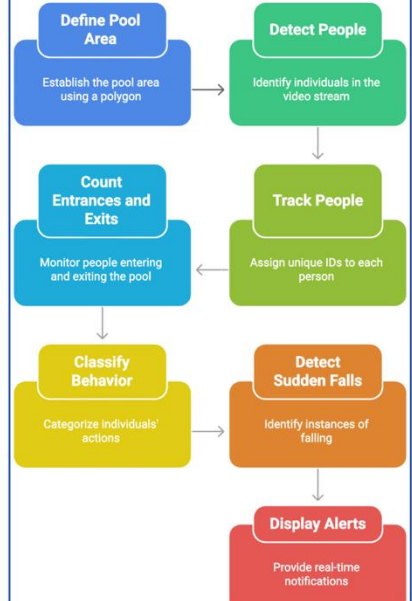


Figure 2: System Methodology Workflow, This Image Created by Team using Napkin.




FUTURE WORK

- Mobile app notification
- Cloud storage
- Night vision support
- Sound detection for screams
- Thermal camera integration

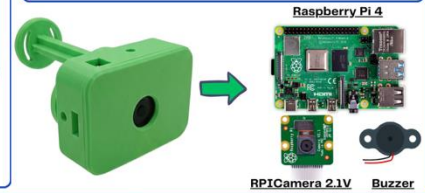

Data Analysis & Interpretation

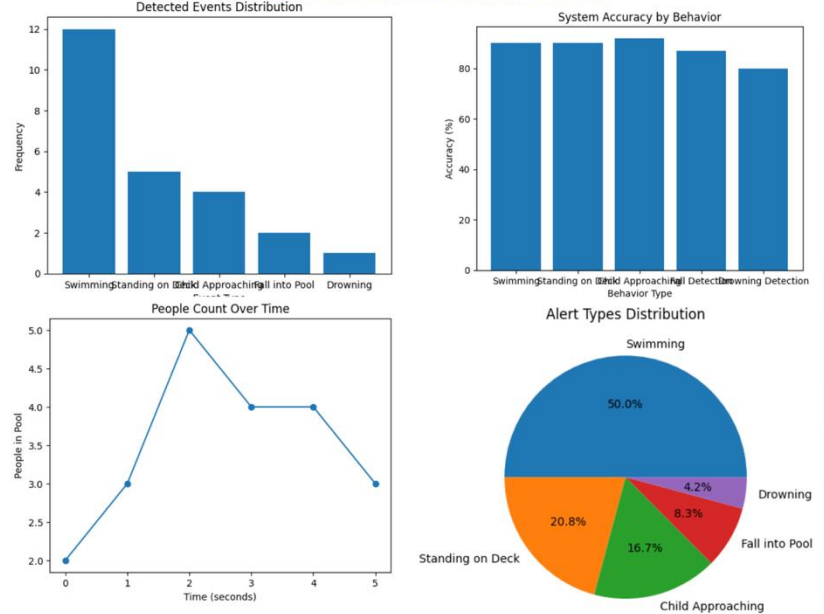

Hardware Demonstration



Figure 6: Digital boundaries and ROI (Region of Interest) masking interface.

System Demonstration

