


# PRODUCT DATA

## VALVES

### PVC-U SWINGING BOTTOM VALVE

NEW

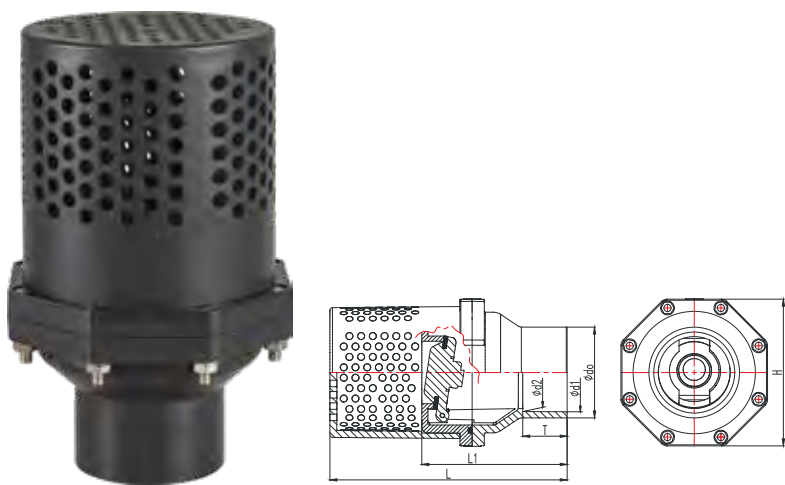


Code	Size DN	Dimensions (mm)							Nominal Pressure PN(kg/cm²)	Minimum Opening Pressure PN(kg/cm²)
		d0	d1	d2	T	L1	L	H		
503010100601	65(75)	88.20	75.40	74.90	43.70	160.00	266.00	169.00	PN6	0.15-0.3
503010100602	80(90)	104.60	90.50	89.90	51.20	167.50	273.50	169.00	PN6	0.15-0.3
503010100603	100(110)	125.40	110.60	109.90	61.20	218.00	379.00	206.00	PN6	0.15-0.3
503010100604	De125(125)	145.50	125.70	124.90	68.70	215.50	386.50	206.00	PN6	0.15-0.3
503010100605	125(140)	164.00	140.75	139.90	76.30	294.80	496.30	285.00	PN6	0.15-0.3
503010100606	150(160)	186.00	160.80	159.90	87.00	304.50	505.80	285.00	PN6	0.15-0.3

#### Valve Description

- 1. Material: PVC-U
- 2. Size: DN65-150
- 3. Standard: DIN
- 4. Connection: Socket
- 5. Color: Dark Gray

#### Product Features

- 1. Meet drinking water standards.
- 2. Parts can be replaced, simple and economical.
- 3. The material is nano-modified to improve the pressure resistance and impact resistance of the product.
- 4. Thickened valve body for high compression resistance.
- 5. Valve factory 100% pressure test.

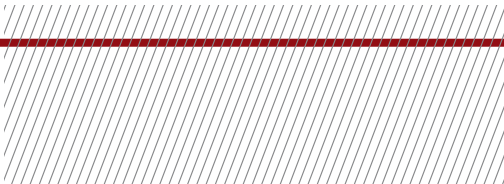

N0.	Name	Quantity	Material
01	Drain Body	1	PVC-U
02	Body	1	PVC-U
03	Ring1	1	EPDM
04	Trap	1	PVC-U
05	Fixed Block	2	PVC-U
06	Ring2	1	EPDM
07	Cover	1	PVC-U
08	Sit Bolt	12	Stainless steel
09	Nut	12	Stainless steel
10	Gasket	12	Stainless steel

