MD – MODULAR HOOD
Technical Specifications



MD 1990 x 1740 mm

Modular Hood

EASY TO ASSEMBLE & OPERATE

WHERE TO USE

- VANTERM Modular Hood is used to control and capture the welding smoke and dust in welding-shops.
- It fits for all welding processes and particularly the robotic welding applications. MD-Modular Hood avoids the toxic welding-smoke and dust particles, spreading into the production halls.

ENERGY SAVING

- When Modular Hood is used, a much more effective welding-shop ventilation is achieved with a relative less airflow capacity.
- MD-Modular Hood has a very low pressure loss.
- The dust collector that should be used with the Modular Hood, requires lower motor power. As a result, the investment- and operating-costs decrease.
- Depending on the required airflow capacity, VANTERM AC, KAB and SM model dust collectors can be used with MD-Modular Hoods.

TRANSPORT ADVANTAGE-EASY ASSEMBLY

- Easy to transport, in comparison to the conventional type of hoods, due to its compact design.
- VANTERM Modular Hood is delivered as disassembled, which reduces transport cost.
- Very easy to assemble at site thanks to its modular construction. No need to use any special tool or equipment for the assembly.
- VANTERM MD-Modular Hoods can be used in two versions;
  - As fixed on the ground via 2,0 - 2,5 or 3,0m. high feet.

  Or;
  - As fixed to the ceiling via its lifting eyebolts.

MAXIMUM SAFETY & PROTECTION


- There are welding-strip curtains, made of PVC that surrounds VANTERM Modular Hood. The strip curtains are certified acc. to the EN ISO 25980:2015 “Health and safety in welding and allied processes” standard.
- As a result, VANTERM Modular Hood offers maximum safety and protection against hazardous UV- and IR-rays during welding.
- The strip curtains on standart VANTERM Modular Hoods are silicon-free. The color is RAL 3000 Red color.


FLEXIBLITY - ERGONOMICS


- The flexible strip curtains enables an easy and fast access to the welding zone, when necessary.
- VANTERM Modular Hoods are produced according to the standart sizes shown on the next page. Additionally, thanks to the modular design feature of MD-Hoods, VANTERM offers hoods for different sizes as well, on request.
- The smallest VANTERM Modular Hood has a size of 990x1240mm.
- The height of the strip curtains on standart VANTERM Modular Hood is 160cm. Different heights are available, on request.
- IP65 lighting inside the Modular Hood is available, on request.

EASY MAINTENANCE

- The strip curtains of a VANTERM Modular Hood can be easily changed, when necessary. If required, each strip curtain can be changed independent from the next strip.

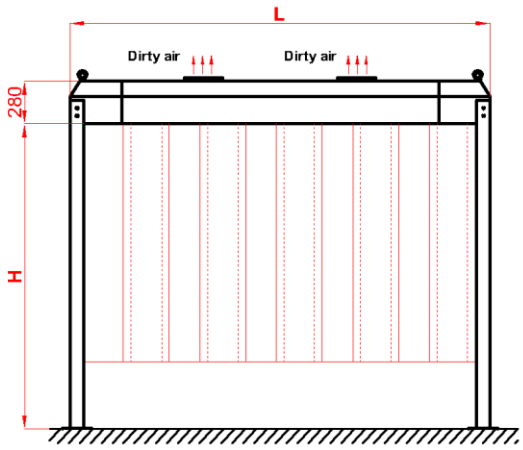

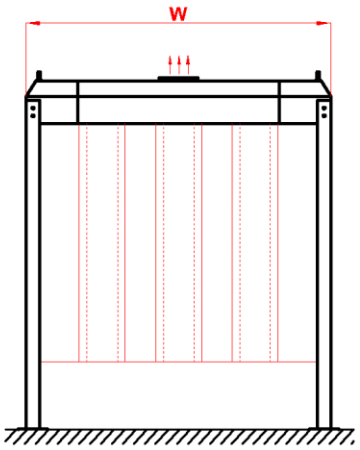

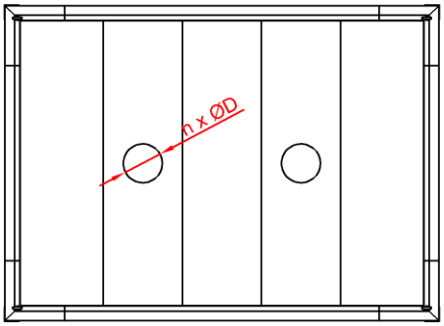



MD-1990x2240 Modular Hood

TYPE – (WxL)	CAPACITY (m^3/h)	n x ØD (mm)
MD – 990x1240	750 - 1100	1 x 200
MD – 990x1740	1050 - 1550	1 x 200
MD – 990x2240	1350 - 2000	1 x 200
MD – 990x2740	1650 - 2450	2 x 200
MD – 990x3240	1950 - 2900	2 x 200
MD – 990x3740	2250 - 3350	2 x 200
MD – 1240x1240	950 – 1400	1 x 250
MD – 1240x1740	1300 – 1950	1 x 250
MD – 1240x2240	1700 – 2500	1 x 250
MD – 1240x2740	2050 – 3050	2 x 250
MD – 1240x3240	2400 – 3650	2 x 250
MD – 1240x3740	2800 - 4200	2 x 250

TYPE – (WxL)	CAPACITY (m^3/h)	n x ØD (mm)
MD – 1990x1240	1500 - 2200	1 x 300
MD – 1990x1740	2100 - 3100	1 x 300
MD – 1990x2240	2700 - 4000	2 x 300
MD – 1990x2740	3280 - 4900	2 x 300
MD – 1990x3240	3900 - 5800	2 x 300
MD – 1990x3740	4450 - 6700	2 x 300
MD – 2490x1240	1850 – 2800	1 x 300
MD – 2490x1740	2600 - 3900	1 x 300
MD – 2490x2240	3350 - 5000	2 x 300
MD – 2490x2740	4100 – 6150	2 x 300
MD – 2490x3240	4850 - 7300	2 x 300
MD – 2490x3740	5600 - 8400	3 x 300

- The pressure loss on Modular Hoods are approximately 250 Pa.
- The height (H) of a standart Modular Hood is 2000mm.
  H: 2500 or 3000mm (optional)
- The table above shows the standart sizes. However, VANTERM Modular Hoods have a flexible and modular design. Therefore, VANTERM offers different size of Modular Hoods, on request as well.
- VANTERM keeps its right to change the capacity of the Modular Hood, depending on the type of the welding process.
- The filter units that should be used together with MD-Modular hoods, can be chosen from the VANTERM standart product range.

VANTERM Isı Ve Makina San. Tic. A.Ş.
GOSB 800. Sok. No:804 41480 Gebze/Kocaeli TURKEY
Tel:+90 262 751 05 94(Pbx) www.vanterm.com

VANTERM