
PART No.
TGM-02-296B-xx

5 REV.

Rt=12 (G Rt=0.8)

MinebeaMitsumi Inc.
Copy Issued Uncontrolled
7/5/2568
Engineering Design center
G/M.1 & M/A. Div.

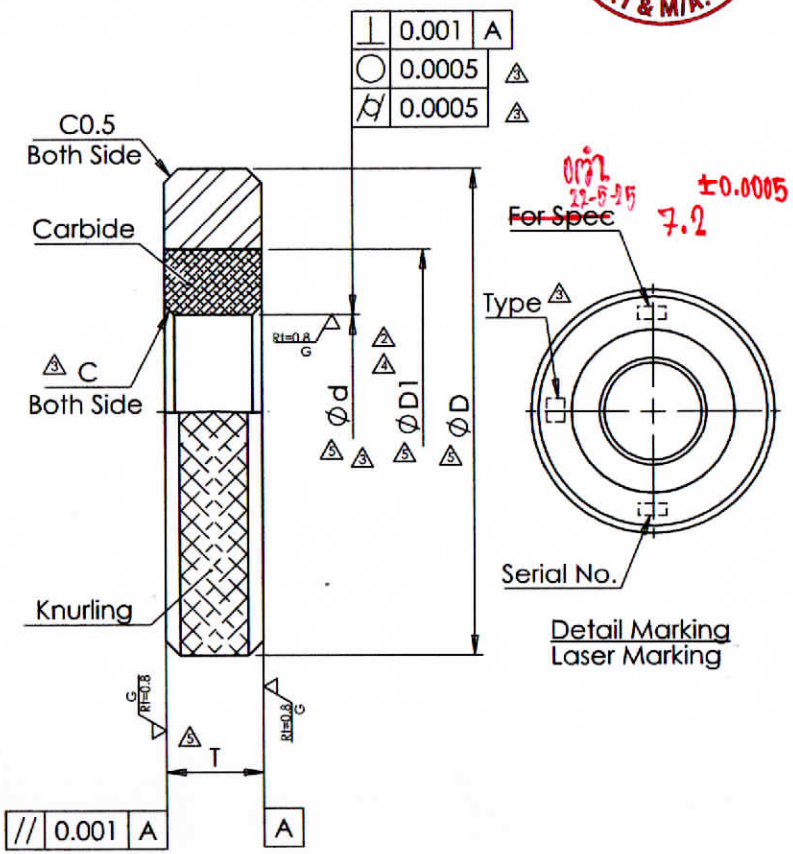


Note: 1. Break all Corner approx by C0.1
2. General Tolerance ±0.1

| Item | T | ØD | ØD1 | C | Ød | For Spec | Type | Serial No. | Part No. | Check |
|---|---|---|---|---|---|---|---|---|---|---|
| -76 | 5 | Ø22 | Ø12 | C0.1 +0.05 0 | Ø4.15 ±0.0005 | - | BS | | A5B80-6Q | Preecha RQ74/25 |
| -77 | 10 | Ø38 | Ø20 | C0.1 +0.05 0 | Ø11.83 ±0.0005 | - | BS | | A6948-1 | Preecha RQ74/25 |
| -78 | 10 | Ø38 | Ø20 | C0.1 +0.05 0 | Ø11.915 ±0.0005 | - | BS | | A6955-1 | Preecha RQ74/25 |
| -79 | 10 | Ø38 | Ø20 | C0.1 +0.05 0 | Ø10.47 ±0.0005 | Ø10.47 0 -0.03 | BS | | T7202-F1A | Preecha RQ74/25 |
| -80 | 10 | Ø38 | Ø23 | C0.1 +0.05 0 | Ø13.95 ±0.0005 | Ø13.95 0 -0.05 | BS | | T7202-F1A | Preecha RQ74/25 |
| -81 | 10 | Ø38 | Ø23 | C0.1 +0.05 0 | Ø14 ± 0.0005 | Ø14 +0.1 0 | BS | | T7202-F1A | Preecha RQ74/25 |
| -82 | 8 | Ø32 | Ø15 | C0.1 +0.05 0 | Ø 5.9 ± 0.0005 | Ø 5.9 ± 0.1 | BS | | A5D04-4 | Preecha RQ129/25 |
| -83 | 8 | Ø32 | Ø15 | C0.1 +0.05 0 | Ø 7.2 ±0.0005 | Ø 7.2 ±0.015 | BS | No. 1, No. 2 | T7225 | Preecha RQ129/25 |
| -84 | 12 | Ø45 | Ø25 | C0.1 +0.05 0 | Ø16.035 ± 0.0005 | Ø 16.035 ± 0.015 | BS | | T7205 | Preecha RQ129/25 |
| -85 | 5 | Ø22 | Ø12 | C0.05max | Ø3.985 ± 0.0005 | Ø3.985 -0.002 -0.010 | BS | | F2010-5C | Preecha RQ144/25 |
| -86 | 5 | Ø22 | Ø12 | C0.05max | Ø4.985 ± 0.0005 | Ø4.985 -0.002 -0.010 | BS | | F2016-5A | Preecha RQ144/25 |
| -87 | 8 | Ø32 | Ø15 | C0.05max | Ø6.335 ± 0.0005 | Ø 6.335 -0.002 -0.010 | BS | | F3020-5 | Preecha RQ144/25 |
| -88 | 8 | Ø32 | Ø15 | C0.05max | Ø 6.44 ± 0.0005 | Ø6.44 +0.003 -0.005 | BS | | D5A01-5 | Preecha RQ144/25 |
| -89 | | | | | | | | | | |
| -90 | | | | | | | | | | |

| REV. | ECN No. | DATE | NAME | DESCRIPTION |
|---|---|---|---|---|
| 1 | ---- | ---- | --- | ENGINEERING RELEASE |
| 2 | ---- | 14 OCT'21 | Preecha | Ch : Ø42 => Ø45 , etc. |
| 3 | ---- | 22 FEB'22 | Preecha | Add : Marking Type , etc. RQ:85/22 |
| 4 | ---- | 29 JUN'22 | Preecha | Ch : Ø26 => Ø81 , etc. RQ:258/22 |
| 5 | ---- | 14 MAR'23 | Preecha | Up date spec T , ØD , ØD1 , etc. RQ:67/23 |

| UNLESS SPECIFIED C0.1 OR R0.1 GENERAL TOLERANCE JIS B0405 MACHING WORKING | |
|---|---|
| LESS THAN 0.5 | ±0.05 |
| 0.5 ~ 6 | ±0.1 |
| 6 ~ 30 | ±0.2 |
| 30 ~ 120 | ±0.3 |
| 120 ~ 400 | ±0.4 |
| 400 ~ 1000 | ±0.8 |
| ANGLE | ±1° |

0.8S 6.3S 25S 100S ~ UNCUT

M/C. - Q'ty -

MATERIAL Carbide + SKS-3

FINISH -

HEAT TREATMENT HRC 58~62

List Request No. 448/21

3 RD ANGLE

SCALE : SHEET / UNIT (mm.)

| DETAILED | DESIGNED | CHECKED | APPROVED |
|---|---|---|---|
| Phalachai | Aphisek | Preecha | Preecha |

DATE 11 OCT'22

NMB MinebeaMitsumi Inc.
General Machining Parts Div. 1

TITLE: Master Ring Gauge (B)

PART No. TGM-02-296B-xx 5 REV.