PART No.
TGM-04-210GS2-xx

14 REV.

Note: 1. Break all Corner approx by C0.05
2. General Tolerance ±0.05
3. Before Ass'y Pin mush control Surface Rough
4. The size of the ID. Complete


Rt=6 ( Lap Rt=0.8 )


Area D-Cut (x8)

DETAIL P
SCALE 5 : 1
Area D-Cut


DETAIL H
SCALE 6 : 1

No. GTI130 Press

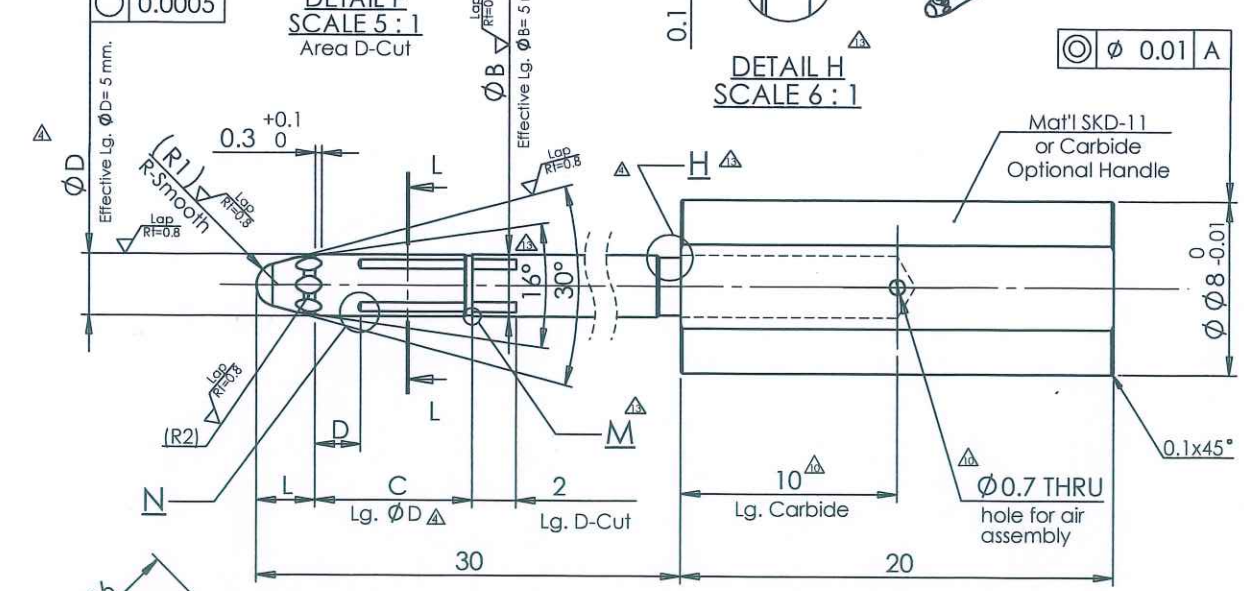


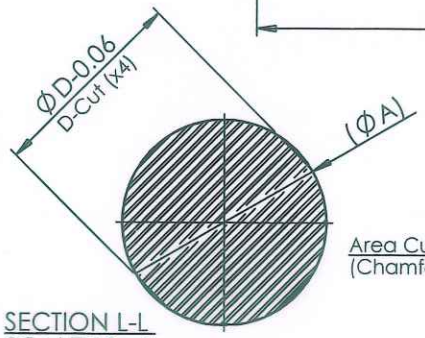

SECTION L-L
SCALE 10 : 1




DETAIL N
SCALE 10 : 1

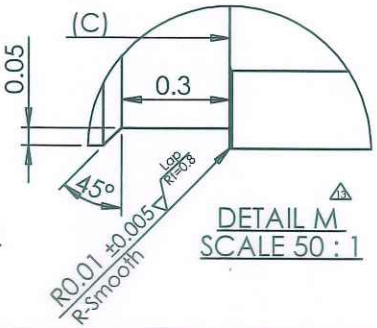


DETAIL M
SCALE 50 : 1




Marking Dwg. No
- For P/No.
- spec. #14

| Item | ØD | ØB | C | L | D | For Spec. | For P/No. | Check |
|---|---|---|---|---|---|---|---|---|
| -29 | +0.0036 +0.0016 Ø4.596 | 0 -0.002 Ø4.622 | 12.56 | 4.5 | 2 | ±0.012 Ø4.61 | D30222AACP1 (Special) | PREECHA RQ.329/23 |
| -30 | +0.0036 +0.0016 Ø4.596 | 0 -0.002 Ø4.622 | 4.81 | 4.5 | 2 | +0.012 -0.014 Ø4.61 | D30222AACP1 (Special) | PREECHA RQ.329/23 |
| -31 | +0.0036 +0.0016 Ø4.598 | 0 -0.002 Ø4.622 | 4.81 | 4.5 | 2 | ±0.012 Ø4.61 | D30222AACP1 (Special) | PREECHA RQ.329/23 |
| -32 | +0.0020 +0.0015 Ø4.4 | 0 -0.0005 Ø4.42 | 6.5 | 4.5 | 2 | ±0.01 Ø4.41 | FF3030-2-07 | PREECHA RQ.111/24 |
| -33 | +0.0020 +0.0015 Ø4.05 | 0 -0.0005 Ø4.07 | 6.5 | 4.5 | 2 | ±0.01 Ø4.06 | FF3030-2-07 | PREECHA RQ.111/24 |
| -34 | +0.0036 +0.0016 Ø4.408 | 0 -0.002 Ø4.432 | 6.5 | 4.2 | 2 | ±0.012 Ø4.42 | D30222AACP1T5 (Special) | PREECHA RQ.165/24 |
| -35 | +0.0015 +0.0010 Ø4.05 | 0 -0.0005 Ø4.07 | 5 | 3.8 | 3 | +0.02 0 Ø4.05 | F30232ACBP1 (Special) | PREECHA RQ.164/24 |
| -36 | | | | | | | | |
| -37 | | | | | | | | |
| -38 | | | | | | | | |
| -39 | | | | | | | | |
| -40 | | | | | | | | |
| -41 | | | | | | | | |
| -42 | | | | | | | | |

MinebeaMitsumi Inc.
Copy issued Uncontrolled
28/6/2567
Engineering
Design center
G/M.1 & M/A. Div.

| REV. | ECN No. | DATE | NAME | DESCRIPTION |
|---|---|---|---|---|
| 8 | ---- | 8 Dec '15 | PREECHA | Change: Ø3.47 -0.0005 -0.0015 ==> Ø3.67 -0.0005 |
| 9 | ---- | 22 Dec'15 | PREECHA | Change: C etc.; (Top Flank Part Gap = 3) |
| 10 | ---- | 13 Jul'16 | PREECHA | Add: Item -15,-16, Ø0.7 etc'; Rq. 340/16 |
| 11 | ---- | 21 Oct'16 | PREECHA | Add: Part F3010-2 |
| 12 | ---- | 21 Oct'16 | PREECHA | Change: Lg. C Item -18, -19 |
| 13 | ---- | 18 Dec'17 | PREECHA | Add: D-Cut etc.; Rq.628/17 |
| 14 | ---- | 24 OCT'18 | PREECHA | Ch : Ø4.381 -0.0002 ==> Ø4.381 -0.002 Item-21,-22 , etc.RQ533/18 |

| UNLESS SPECIFIED | |
|---|---|
| C0.1 OR R0.1 | |
| GENERAL TOLERANCE | |
| JSB0405 MACHNG WORKNG | |
| LESS THAN 0.5 | ±0.05 |
| 0.5 ~ 6 | ±0.1 |
| 6 ~ 30 | ±0.2 |
| 30 ~ 120 | ±0.3 |
| 120 ~ 400 | ±0.4 |
| 400 ~ 1000 | ±0.8 |
| ANGLE | ±1° |

0.8S 6.3S 25S 100S ~ UNCUT

M/C. MV. 2 | Q'ty 1
MATERIAL No. GTi30 Carbide, SKD-11
FINISH -
HEAT TREATMENT -

List Request No. 2365, 2403
SCALE : | SHEET 2/2 | UNIT (mm.)
3 RD ANGLE

| DETAILED | DESIGNED | CHECKED | APPROVED |
|---|---|---|---|
| CHONKNOK | CHONKNOK | PREECHA | PREECHA |

DATE 10 Jul' 12

NMB MinebeaMitsumi Inc.
General Machining Parts Div. 1

TITLE: Plug Gauge G (GO NOGO)

PART No. TGM-04-210GS2-xx

14 REV.