



SECTION F-F

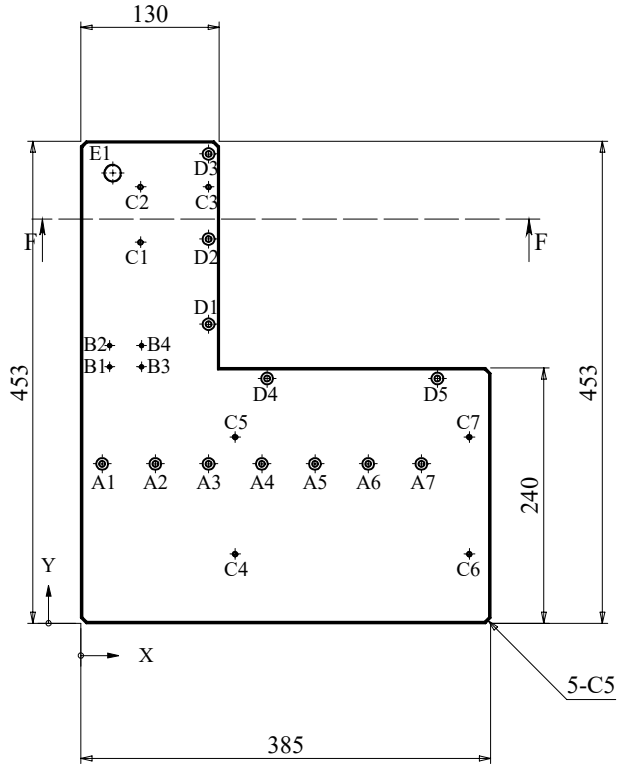

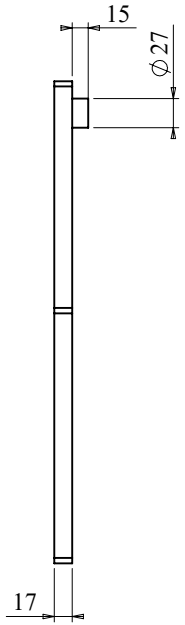

TAG	X LOC	Y LOC	SIZE
A1	20	149.83	Ø 5.50 THRU ALL ⌴ Ø 11 ↧ 5.20
A2	70	149.83	Ø 5.50 THRU ALL ⌴ Ø 11 ↧ 5.20
A3	120	149.83	Ø 5.50 THRU ALL ⌴ Ø 11 ↧ 5.20
A4	170	149.83	Ø 5.50 THRU ALL ⌴ Ø 11 ↧ 5.20
A5	220	149.83	Ø 5.50 THRU ALL ⌴ Ø 11 ↧ 5.20
A6	270	149.83	Ø 5.50 THRU ALL ⌴ Ø 11 ↧ 5.20
A7	320	149.83	Ø 5.50 THRU ALL ⌴ Ø 11 ↧ 5.20
B1	27	241	Ø 3.30 THRU ALL M4x0.7 - 6H THRU ALL
B2	27	261	Ø 3.30 THRU ALL M4x0.7 - 6H THRU ALL
B3	57	241	Ø 3.30 THRU ALL M4x0.7 - 6H THRU ALL
B4	57	261	Ø 3.30 THRU ALL M4x0.7 - 6H THRU ALL
C1	56	358	Ø 4.20 THRU ALL M5x0.8 - 6H THRU ALL
C2	56	410	Ø 4.20 THRU ALL M5x0.8 - 6H THRU ALL
C3	120	410	Ø 4.20 THRU ALL M5x0.8 - 6H THRU ALL
C4	145	65	Ø 4.20 THRU ALL M5x0.8 - 6H THRU ALL
C5	145	175	Ø 4.20 THRU ALL M5x0.8 - 6H THRU ALL
C6	365	65	Ø 4.20 THRU ALL M5x0.8 - 6H THRU ALL
C7	365	175	Ø 4.20 THRU ALL M5x0.8 - 6H THRU ALL
D1	120	281	Ø 5.50 THRU ALL ⌴ Ø 11 ↧ 5
D2	120	361	Ø 5.50 THRU ALL ⌴ Ø 11 ↧ 5
D3	120	441	Ø 5.50 THRU ALL ⌴ Ø 11 ↧ 5
D4	175	230	Ø 5.50 THRU ALL ⌴ Ø 11 ↧ 5
D5	335	230	Ø 5.50 THRU ALL ⌴ Ø 11 ↧ 5
E1	30	423	Ø 15.25 THRU ALL G3/8 - 6H THRU ALL

Minebea Mitsumi Inc.
Passion to Exceed Precision
Uncontrolled Copy
22/ Feb/ 25
ISSUED
G/M 1st Div. Machine Development

Note :

1. Unless otherwise specified all bending edges and corners is R1.0~R5.0

Rev.	ECN No.	DATE	PERSON	DESCRIPTION

UNLESS SPECIFIED C0.2 MAX or R0.2 MAX

GENERAL TOLERANCE

JIS B 0405 MACHINING WORKING	
LESS THAN 0.5	± 0.05
0.5 ~ 6	± 0.1
6 ~ 30	± 0.2
30 ~ 120	± 0.3
120 ~ 400	± 0.4
400 ~ 1000	± 0.8
ANGLES	± 1°

0.8S 6.3S 25S 100S UNCUT

M / C: Modify C15
MATERIAL: SS400
FINISH: Black Oxide
HEAT TREATMENT: -

REMARK

3RD ANGLE PROJECTION

SCALE 1:5 | SHEET 1 / 1 | UNIT : mm

DETAILED	DESIGNED	CHECKED	APPROVED
C.Thongchai	P.Naiwinit	P.Naiwinit	B.Komgrich

DATE : 31-Jan-2025 | Qt'y : - Pcs.

NMB MinebeaMitsumi Inc.
Machine Development Section General Machining Parts 1st Division

Title: Base

DRAWING NUMBER: DVPMA-M-LC15-LS-0010

REV. 1