
PART No.
TGM-02-284S-xx


4 REV.

Rt=12 (G Rt=0.8)

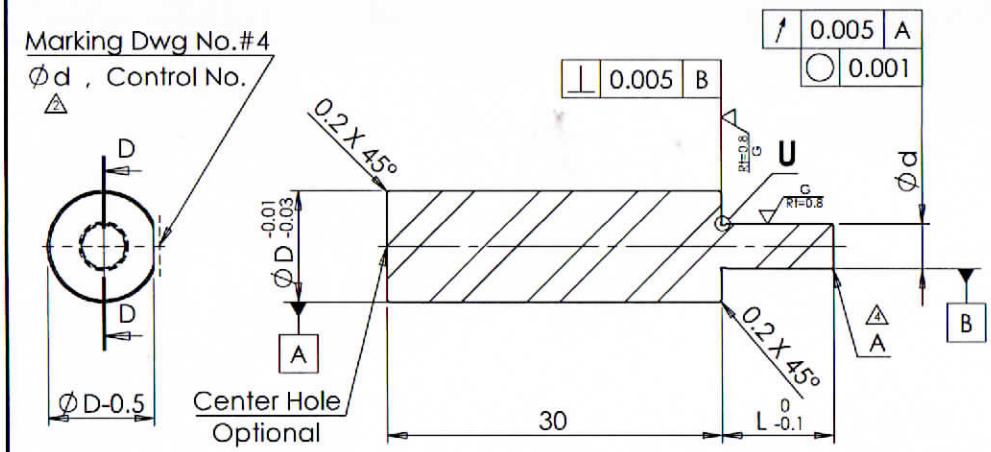

SECTION D-D
SCALE 2 : 1.3

Use For : Spec ØD=2 mm. (Minimum)

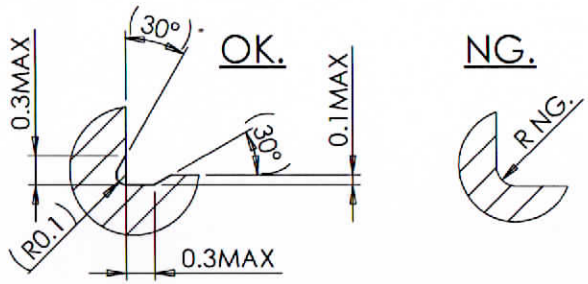

DETAIL U
SCALE 4 : 0.3

Item	Ød	ØD	L	A	Use For ID. Lg	Part No.	Control No.	Check
-41	Ø3.458 $^{0}_{-0.002}$	Ø10	15	C0.1 $^{\pm0.05}$	9.1 $^{\pm0.01}$	A5C68-2		Preecha RQ582/21
-42	Ø3.987 $^{0}_{-0.002}$	Ø10	10	C0.1 $^{\pm0.05}$	5.6 $^{\pm0.02}$	A5B80-5V		Preecha RQ11/22
-43	Ø21.64 $^{0}_{-0.002}$	Ø26	20	C0.1 $^{\pm0.05}$	19.65 $^{\pm0.025}$	T7182AF1B (T/N)		Preecha RQ289/22
-44	Ø10.518 $^{0}_{-0.002}$	Ø13	20	R0.3 $^{0}_{-0.05}$	13.8 $^{\pm0.05}$	T7099AG1A (T/N , CGM)		Preecha RQ314/22
-45	Ø16.45 $^{+0.002}_{0}$	Ø20	15	R0.3 $^{\pm0.05}$	3.1 $^{\pm0.025}$	A6927-1 (T/N)		Preecha RQ431/22
-46	Ø7.023 $^{+0.002}_{0}$	Ø10	18	R0.3 $^{\pm0.05}$	13.52 $^{\pm0.01}$	T7177 (RL1 , RL2)		Preecha RQ460/22
-47	Ø18.92 $^{+0.002}_{0}$	Ø24	40	R0.3 $^{\pm0.05}$	34.45 $^{0}_{-0.05}$	A5C21-1C		Preecha RQ374/23
-48	Ø5.332 $^{0}_{-0.002}$	Ø10	10	R0.3 $^{\pm0.05}$	0.8 $^{\pm0.05}$	A9945-4 (T/N)		Preecha RQ20/24
-49	Ø6.84 $^{0}_{-0.002}$	Ø10	15	R0.1 $^{\pm0.05}$	0.2 $^{\pm0.015}$	F3020-6 F3033-6		Preecha RQ298/24
-50	Ø14.91 $^{+0.002}_{0}$	Ø18	15	R0.3 $^{+0.05}_{0}$	6.665 $^{0}_{-0.03}$	A5D27-1 (T/N)		Preecha RQ101/25
-51	Ø14.984 $^{0}_{-0.002}$	Ø18	15	R0.3 $^{\pm0.05}$	6.7 $^{\pm0.03}$	A5D27-1 (RL) A5D28-1 (RL)		Preecha RQ101/25
-52	Ø24.4 $^{0}_{-0.002}$	Ø28	15	R0.3 $^{\pm0.05}$	6.32 $^{\pm0.005}$	T7226-01F2A		Preecha RQ101/25
-53	Ø16.025 $^{0}_{-0.002}$	Ø20	30	R0.3	25.21 $^{\pm0.02}$	T7205-F1A		Preecha RQ111/25
-54								
-55								
-56								
-57								
-58								
-59								
-60								

Minebea Copy
21 APR 2025
Issued G/M and M/A Div.
Uncontrolled

REV.	ECN No.	DATE	NAME	DESCRIPTION
1	----	----	---	ENGINEERING RELEASE
2	----	18 MAR'14	Preecha	Add : Control No. RQ:192/14
3	----	20DEC'21	Preecha	Ch : Item-32 Spec L1=12 => 15 , RQ:582/21
4	----	9 AUG'22	Preecha	Ch : C0.1 => A , RQ:314/22

UNLESS SPECIFIED C0.1 OR R0.1
GENERAL TOLERANCE
JIS B0405 MACHING WORKING

LESS THAN 0.5	±0.05
0.5 ~ 6	±0.1
6 ~ 30	±0.2
30 ~ 120	±0.3
120 ~ 400	±0.4
400 ~ 1000	±0.8
ANGLE	±1°

0.8S 6.3S 25S 100S UNCUT

M/C. - | Q'ty 1
MATERIAL SKD-11
FINISH -
HEAT TREATMENT HRC 50~60

List Request No. -
3'RD ANGLE
SCALE : | SHEET / | UNIT (mm.)

DETAILED	DESIGNED	CHECKED	APPROVED
Chonknok	Chonknok	Preecha	Preecha

DATE 12 MAR'07

NMB MinebeaMitsumi Inc.
General Machining Parts Div. 1

TITLE: Mandrel
PART No. TGM-02-284S-xx
4 REV.